

JBC

www.jbctools.com



Senior Tip Cleaner

Ref. CLMB-A

Packing List

The following items should be included:


Senior Tip Cleaner 1 unit
Ref. CLMB-A



CLMB-A Metal Brushes 1 unit
Ref. CLMB-A8




AC Adapter 1 unit
Ref. 0014381



Manual 1 unit
Ref. 0014352



Features

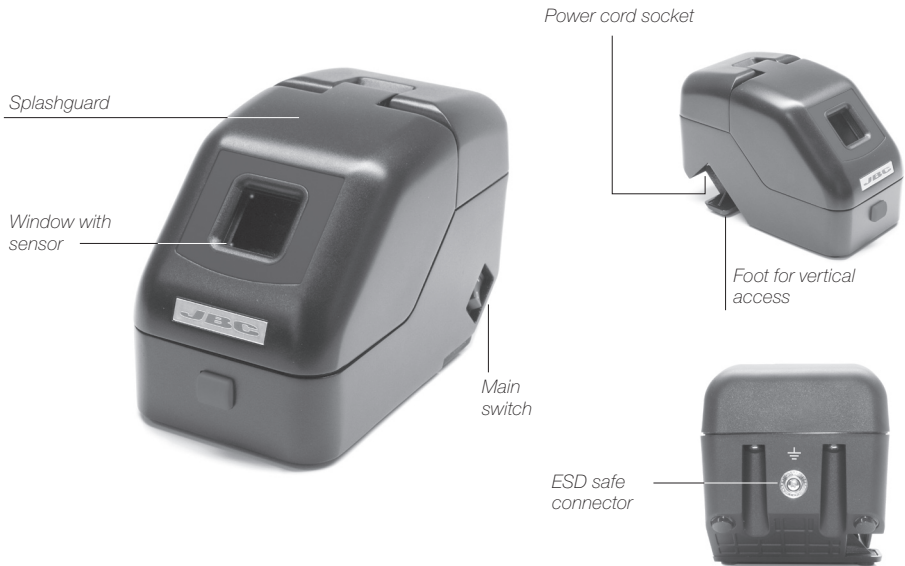

Operation

The CLMB-A consists of 2 motorized brushes that start working when a sensor detects the tip at the window. When the operator removes the tip, the brushes stop working.

For best results, we **recommend** placing the tip between the 2 brushes and turning it for only a second.



Vertical Access

The Senior Tip Cleaner has an upright position which facilitates working with robots.



Changing Brushes

1. Unplug from the mains and lift off the splashguard.
2. Lift up the white piece to remove the brushes.
3. Remove the tin collection tray for cleaning. Once clean, return it followed by the new brushes.



Maintenance

Before carrying out maintenance or storage, always unplug the equipment from the mains.

- Use a damp cloth to clean the splashguard and the inside.
- Check periodically that the sensors are clean. Use a cotton bud with alcohol to clean them.
- Maintain the brushes and the tin collection tray clean.
- Replace any defective or damaged piece. Use original JBC spare parts only.
- Repairs should be performed only by a JBC authorized technical service.



Safety



It is imperative to follow safety guidelines to prevent electric shock, injury, fire or explosion.

- Do not use the appliance for any purpose other than tip cleaning. It is not a tool stand.
- The AC Adapter power supply must be plugged into approved bases.
- Do not leave the appliance unattended when it is running.
- Remove power cord by holding the plug, not the wire.
- Avoid contact with moving parts.
- Keep your workplace clean and tidy. Wear appropriate protection glasses and gloves when working to avoid harm.
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children must not play with the appliance. Cleaning and user maintenance must not be carried out by children without supervision.
- Utmost care must be taken with liquid tin waste which can cause burns.
- Be careful with the fumes produced when soldering.

Exploded View

*Ref: **CLMB-A**
Senior Tip Cleaner*

SPARE PARTS	
CLMB-A:	
- METAL BRUSHES (BLACK CORE)	CLMB-A8
- AC ADAPTER	0014381
- CHASIS AND MOTOR SET	0016362
- BELT	0016344
- METAL TIN COLLECTION TRAY	0016806



Specifications

- AC Adapter: Input: 100-240V, 50Hz
 Output: DC 18V, 0.83A
- Brush diameter: 50 mm
- Weight: 1.187 kg (2.6a lb)
- Dimensions: 100 x 185 x 115 mm
- ESD safe connector

Complies with CE standards.
ESD protected housing "skin effect".

JBC

Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear due to use or mis-use.

In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2002/96/EC, electronic equipment at the end of their life must be collected and returned to an authorized recycling facility.



Manual in other languages available on our website

www.jbctools.com