



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT (APPROX.)
MPSI588T	.1007 LB(45.7g) EA

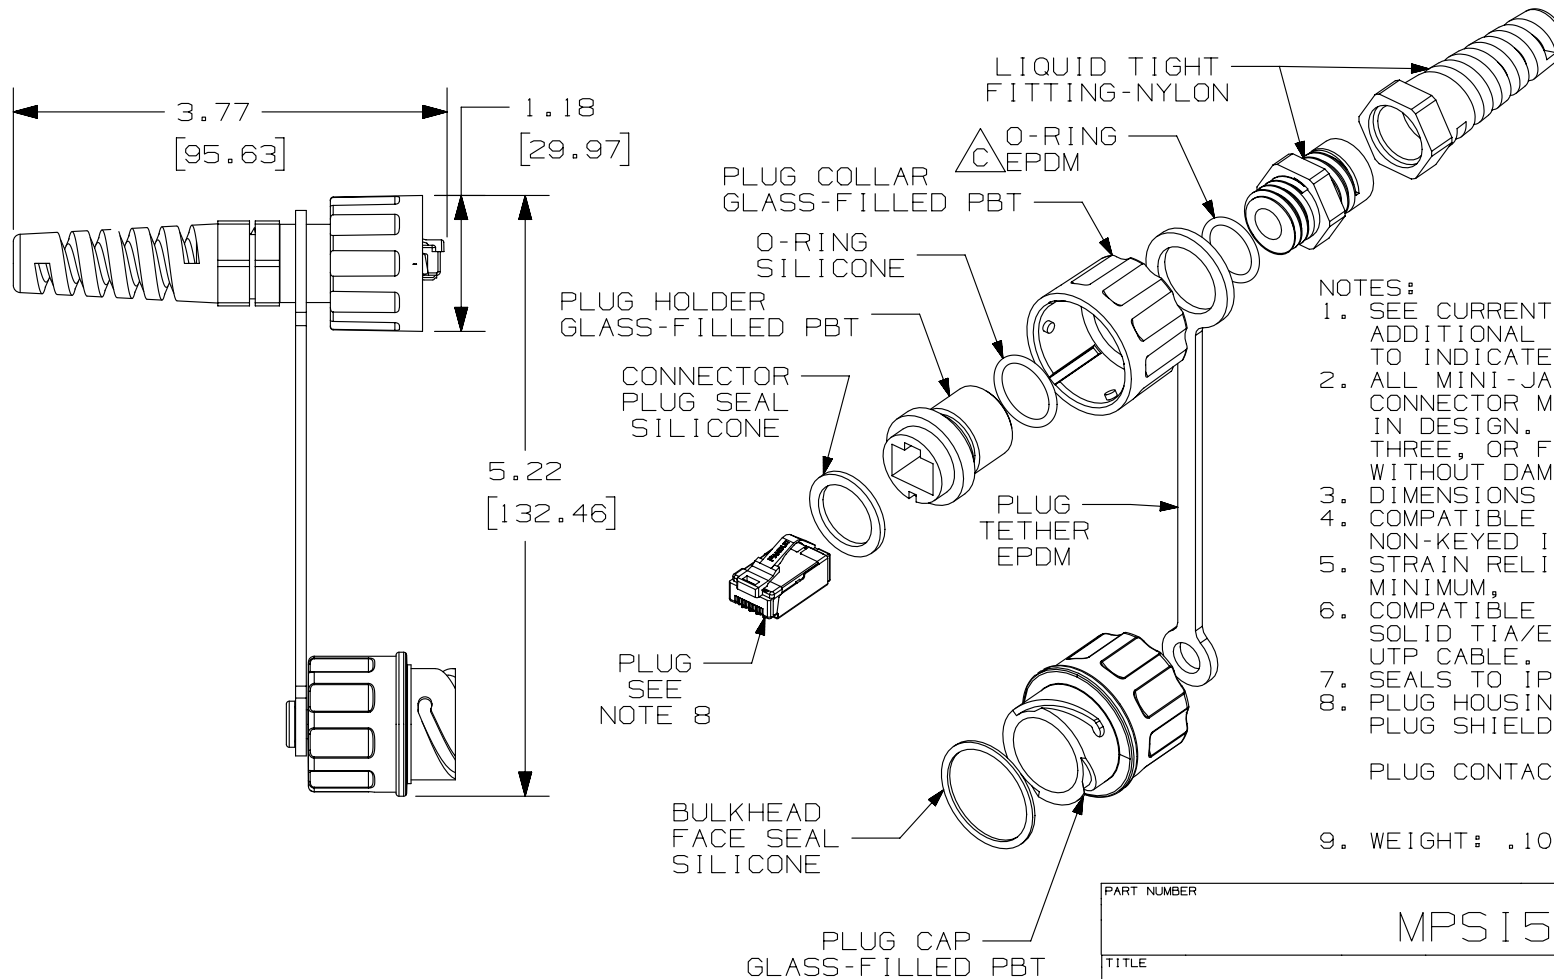

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL PART NUMBER SUFFIXES TO INDICATE PACKAGE QUANTITY.
2. ALL MINI-JACK 8 POSITION, 8 WIRE CONNECTOR MODULES ARE UNIVERSAL IN DESIGN. THEY WILL ACCEPT TWO, THREE, OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
3. DIMENSIONS IN () ARE METRIC.
4. COMPATIBLE WITH 8 POSITION, NON-KEYED IEC 60603-7 PLUG.
5. STRAIN RELIEF TO 25 LBS. MINIMUM.
6. COMPATIBLE WITH STRANDED AND SOLID TIA/EIA 56813 COMPLIANT UTP CABLE.
7. SEALS TO IP67.
8. PLUG HOUSING: UL94V-0 PC
PLUG SHIELD: CARTRIDGE BRASS, NICKEL PLATING
PLUG CONTACT: PHOS. BRONZE, GOLD PLATING, NICKEL UNDERPLATE
9. WEIGHT: .1007 LBS/EA

PART NUMBER		MPS I 588T		
TITLE				
INDUSTRIALNET TX5E SHIELDED MODULAR PLUG				
CUSTOMER DRAWING				
ITEM REVISION NAME		M01245CE/04		
DATASET FILE NAME		M01245CE_DC23/04A		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			MATERIAL:	
.X ± .XXX ± .010 [.3]				
.XX ± .03 [.8]				
ANGLES ±				
THIRD ANGLE PROJECTION				
DRAWING NUMBER:			01245-23	
DRAWN BY	DATE	CHK	SCALE	SIZE
MDJR	5-30-03	KLR	NONE	SHT 1 OF 1
				A

4	4-22-14	MDJR	REFR	GAZ	REVISED AND REDRAWN, ALL PREVIOUS REVISIONS OMITTED. A. UPDATED TITLE BLOCK.	01245-23
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN