

# Keysight 16048A Test Leads

# Notices

© Keysight Technologies  
1990-2020

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies, Inc. as governed by United States and international copyright laws.

## Trademark Acknowledgments

## Manual Part Number

16048-90001

## Edition

Edition 8, January 2020

Printed in Malaysia

Published by:

Keysight Technologies International  
Japan G.K.,  
1-3-3 Higashikawasaki-cho  
Chuo-ku  
Kobe-shi, Hyogo, Japan

## Warranty

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED “AS IS,” AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, KEYSIGHT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. KEYSIGHT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD KEYSIGHT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS

COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

## Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

## Declaration of Conformity

Declarations of Conformity for this product and for other Keysight products may be downloaded from the Web. Go to <http://www.keysight.com/go/conformity>. You can then search by product number to find the latest Declaration of Conformity.

## U.S. Government Rights

The Software is “commercial computer software,” as defined by Federal Acquisition Regulation (“FAR”) 2.101. Pursuant to FAR 12.212 and 27.405-3 and Department of Defense FAR Supplement (“DFARS”) 227.7202, the U.S. government acquires commercial computer software under the same terms by which the software is customarily provided to the public. Accordingly, Keysight provides the Software to U.S. government customers under its standard commercial license, which is embodied in its End User License Agreement (EULA), a copy of which can be found at

<http://www.keysight.com/find/sweula> The license set forth in the EULA represents the exclusive authority by which the U.S. government may use, modify, distribute, or disclose the Software. The EULA and the license set forth therein, does not require or permit, among other things, that Keysight: (1) Furnish technical information related to commercial computer software or commercial computer software documentation that is not customarily provided to the public; or (2) Relinquish to, or otherwise provide, the government rights in excess of these rights customarily provided to the public to use, modify, reproduce, release,

perform, display, or disclose commercial computer software or commercial computer software documentation. No additional government requirements beyond those set forth in the EULA shall apply, except to the extent that those terms, rights, or licenses are explicitly required from all providers of commercial computer software pursuant to the FAR and the DFARS and are set forth specifically in writing elsewhere in the EULA. Keysight shall be under no obligation to update, revise or otherwise modify the Software. With respect to any technical data as defined by FAR 2.101, pursuant to FAR 12.211 and 27.404.2 and DFARS 227.7102, the U.S. government acquires no greater than Limited Rights as defined in FAR 27.401 or DFARS 227.7103-5 (c), as applicable in any technical data.

## Safety Notices

### CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a CAUTION notice until the indicated conditions are fully understood and met.

### WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a WARNING notice until the indicated conditions are fully understood and met.

## Table of Contents

1. Operation	
Product Description . . . . .	5
Specifications . . . . .	6
Typical Characteristics . . . . .	7
Compensation for Fixture Residual Impedance Error . . . . .	8
2. Service	
Introduction . . . . .	9
Maintenance . . . . .	9



# 1 Operation

This operating note provides complete information on the 16048A Test Leads. The 16048A is shown pictorially in **Figure 1-1**, its physical dimensions are given in **Table 1-1**, and typical characteristics related to offset error are given in **Table 1-2**. To order additional copies of this operating note, use the option number listed on [www.keysight.com](http://www.keysight.com).

## Product Description

The 16048A consists of a direct attachment, 4-terminal pair type fixture which is equipped with four BNC (m) terminated-coaxial test leads. These test leads are used to attach user-fabricated test fixtures. DC bias levels of up to  $\pm 42\text{V}$  can be applied to the 16048A. Cable length is 1 meter. The 16048A is shown in **Figure 1-1**.

Figure 1-1 Product Overview



## Specifications

**Table 1-1**      **Specifications of the 16048A**

Function:	For use with 4 terminal-pair LCR Meters and Impedance Analyzers.
Connector Type:	BNC male
Cable Length:	Approximately 1m
Maximum Voltage:	± 42V peak max. (AC+DC)
Frequency Range:	DC to 30 MHz
Weight:	315 g
Safety Standards:	EN61010-1:1993 +A2:1995 IEC61010-1:1990 +A1:1992 +A2:1995 CSA C22.2 No.1010.1:1992  INSTALLATION CATEGORY I POLLUTION DEGREE 2 INDOOR USE

Typical Characteristics


Table 1-2 Typical Characteristics

Incremental error at freq ≥ 1 MHz.	
Parameter reading error (%)	Offset value for D
$\pm 5 \times \left(\frac{f}{10}\right)^2$	$\pm 0.02 \times \left(\frac{f}{10}\right)^2$

NOTE

f is the measurement frequency in megahertz. The incremental errors calculated from the equation in the table for measurements at frequencies above 1 MHz are additive.

Figure 1-2

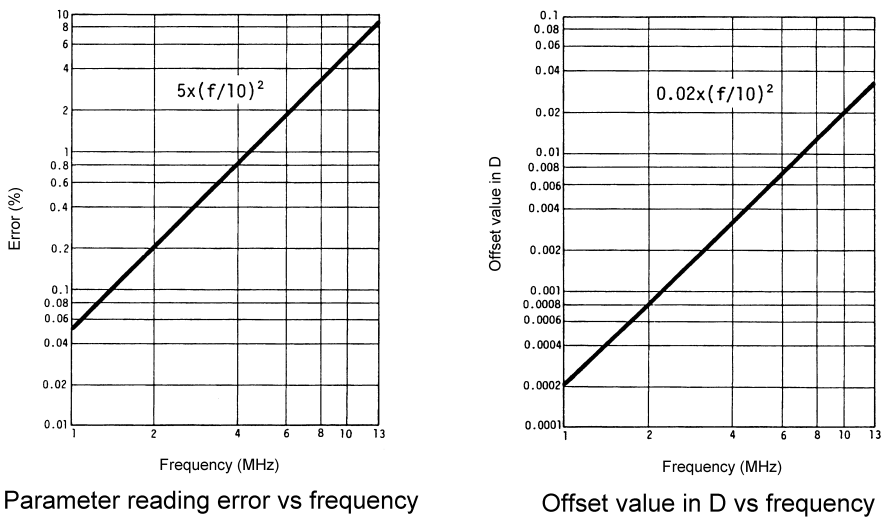

## Compensation for Fixture Residual Impedance Error

The 16048A has inherent stray capacitance, residual inductance, and residual resistance that affect the accuracy of measured values. To compensate for, or negate, these residuals to minimize measurement error, the instrument's Open/Short compensation procedure should be performed. The procedure is given in the instrument's operating manual.



## 2 Service

### Introduction

This chapter gives the service information for the 16048A.

Serial Number for Non-RoHS 16048A:

“MY44100001 – MY44199999” or “SG44100001 – SG44199999”

Serial Number for RoHS 16048A:

“MY44200001 and above” or “SG44200001 and above”.

### Maintenance

Shown are the supported parts and their respective RoHS compliant replacement support part. RoHS conversion involves with design and dimension change which result in the RoHS support part backward incompatible with non-RoHS 16048A. Special handling is needed while using the RoHS replacement part on non-RoHS 16048A. The original support part number is replaced by the respective “RoHS Compliant Replacement Part”.

Do not disassemble any further than shown. Maintenance consists principally of cleaning contacts and replacing worn or damaged parts. Take special care when cleaning contacts. To order parts, use the Keysight Technologies part numbers listed in **Table 2-1**. If a faulty part is located in an assembly that cannot be disassembled, order the next higher assembly or return the whole device to the nearest Keysight Technologies Sales/Service Office for repair or replacement.

Figure 2-1      Parts Identification

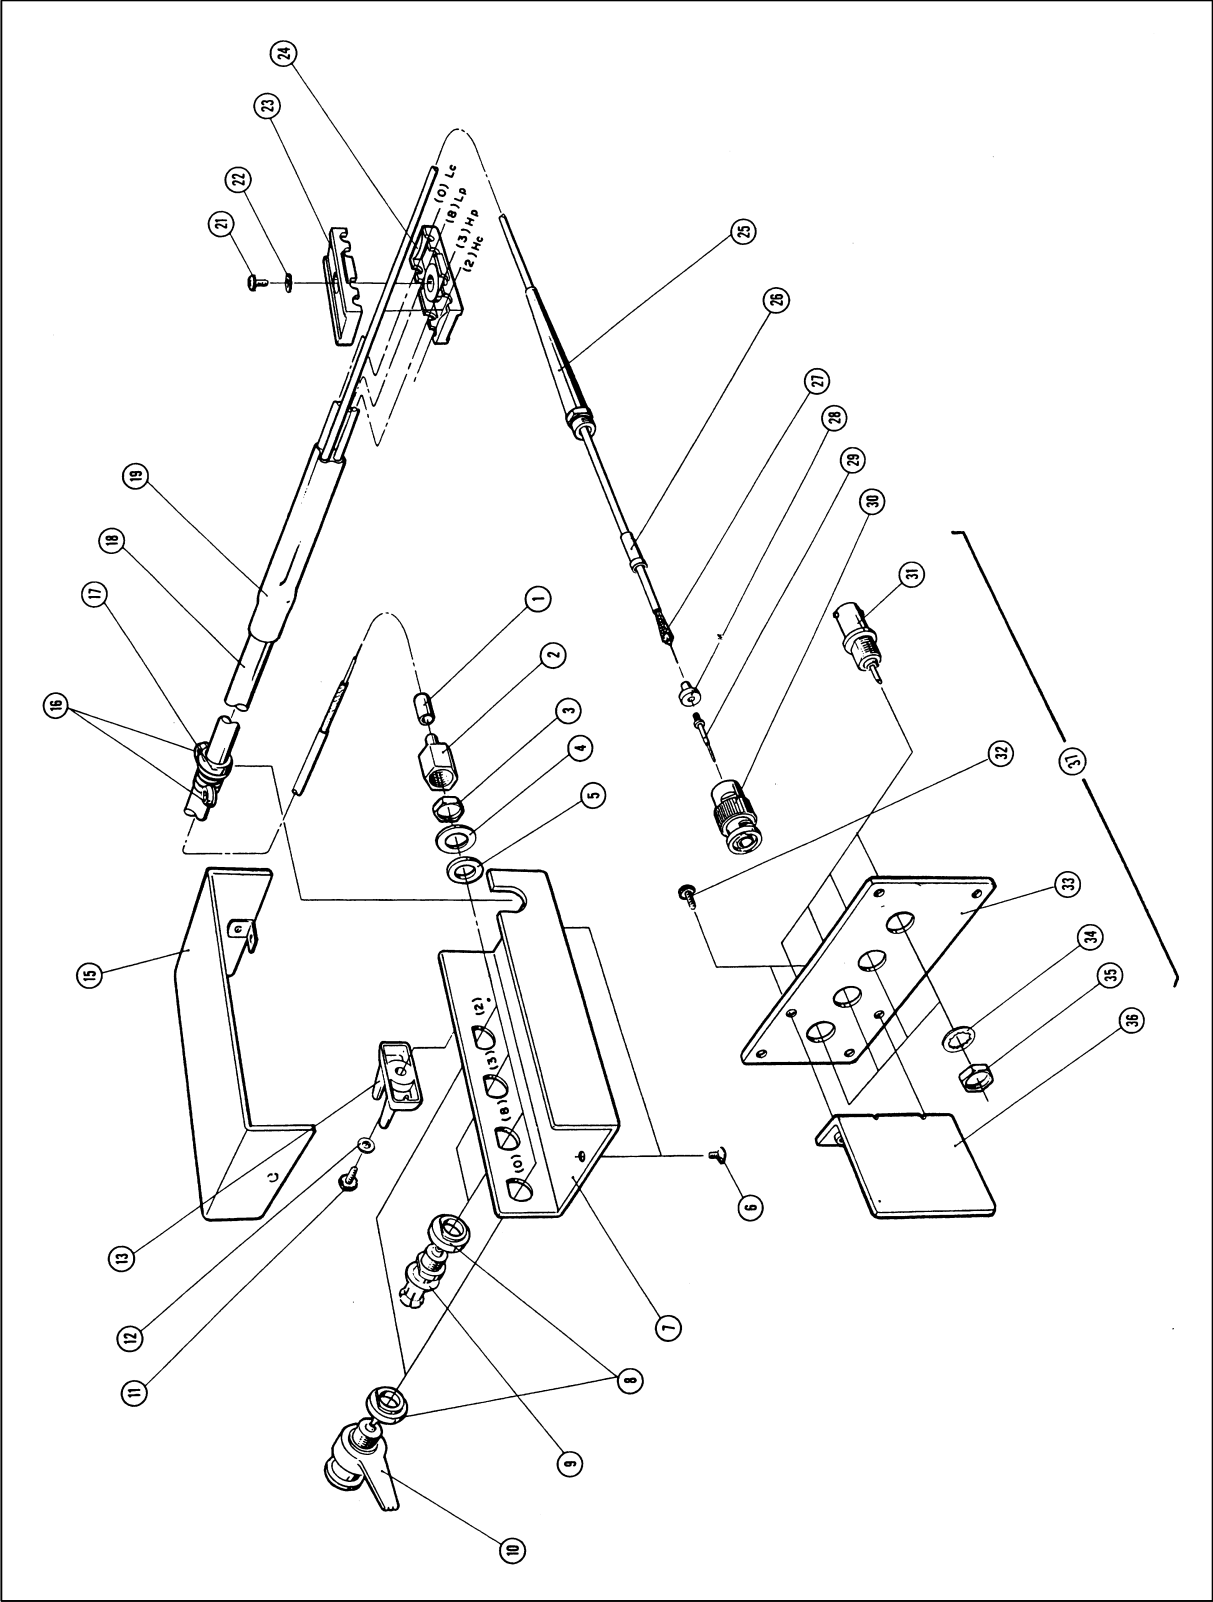


Table 2-1

Replaceable Part

Ref /D	Non-RoHS Part No.	Description	Qty	RoHS Compliant Replacement Part	Description	Qty
1	*	SLEEVE	4	*	-	4
2	*	NUT	4	*	-	4
3	*	NUT	4	*	-	4
4	*	WASHER	4	*	-	4
5	*	WASHER	4	*	-	4
6	2360-0192	SCREW	2	16048-60610	TEST LEAD	2
7	*	COVER-BOTTOM	1	*	-	1
8	*	INSULATOR	4	*	-	4
9	*	CONNECTOR-BNC	2	*	-	2
10	*	CONNECTOR-BNC	2	*	-	2
11	2200-0103	SCREW	1	*	-	1
12	2190-0206	WASHER	1	*	-	1
13	16047-40000	STOPPER	1	*	-	1
15	16048-04000	COVER-TOP	1	16048-60610	TEST LEAD	1
16	1400-0719 (1400-3284)	CABLE TIE	2	1400-3284	CABLE TIE	2
17	*	GROMMET	1	*	-	1
18	*	CABLE	1	*	-	1
19	*	BUSHING	1	*	-	1
21	2360-0115	SCREW	1	16048-60610	TEST LEAD	1
22	3050-0010	WASHER	1	16048-60610	TEST LEAD	1
23	16021-50021	CABLE CRAMP	1	16048-60610	TEST LEAD	1
24	16021-50022	CABLE CRAMP	1	16048-60610	TEST LEAD	1
25	*	BOOT-BNC	4	*	-	4
26	*	SLEEVE	4	*	-	4
27	*	SLEEVE	4	*	-	4
28	*	INSULATOR	4	*	-	4

Table 2-1

Replaceable Part

Ref /D	Non-RoHS Part No.	Description	Qty	RoHS Compliant Replacement Part	Description	Qty
29	1250-0089	CONTACT	4	1250-0089	CONTACT	4
30	1250-0052	CONNECTOR-BNC	4	1250-0052	CONNECTOR -BNC	4
	16048-60010	TEST LEAD (1 thru 30)	1	16048-60610	TEST LEAD	1
31	1250-0118	CONNECTOR-BNC FEMALE	4	1250-0118	CONNECTOR -BNC FEMALE	4
32	2360-0115	SCREW	2	<sup>a</sup> Set Change: 0515-0372	SCREW	2
33	16032-10021	PLATE	1	<sup>a</sup> Set Change: 16032-10621	PLATE	1
34	2190-0016	WASHER	4	2190-0016	WASHER	4
35	2950-0001	NUT	4	2950-0001	NUT	4
36	16032-10022	PLATE	1	<sup>a</sup> Set Change: 16032-10622	PLATE	1
37	16032-60001	BNC BRACKET (31 thru 36)	1	16032-60071	CONNECTOR ASSEMBLY	1

a. Replace all the associated parts marked with <sup>a</sup> as they are mutually dependent.

\*. Not separately replaceable. Order 16048-60010.

This information is subject to change without notice.

© Keysight Technologies 1990-2020

Edition 8, January 2020



16048-90001

[www.keysight.com](http://www.keysight.com)

