

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	STUD SIZE	DIMENSIONS - in. [mm]				
		A ± .02 [0,5]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .02 [0,5]	H ± .01 [0,3]
P10-6RHT6	#6	.78 [19,81]	.31 [7,87]	.35 [8,89]	.62 [15,75]	.15 [3,81]
P10-8RHT6	#8	.78 [19,81]	.31 [7,87]	.35 [8,89]	.62 [15,75]	.17 [4,32]
P10-10RHT6	#10	.81 [20,57]	.38 [9,65]	.33 [8,38]	.62 [15,75]	.20 [5,08]
P10-14RHT6	1/4"	.96 [24,38]	.53 [13,46]	.42 [10,67]	.70 [17,78]	.27 [6,86]

UL TOOLS

CT-100A
CT-200
CT-600-A (CT-570CH)
CT-1570
CT-1701 (P10)
CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS

CT-160
CT-260

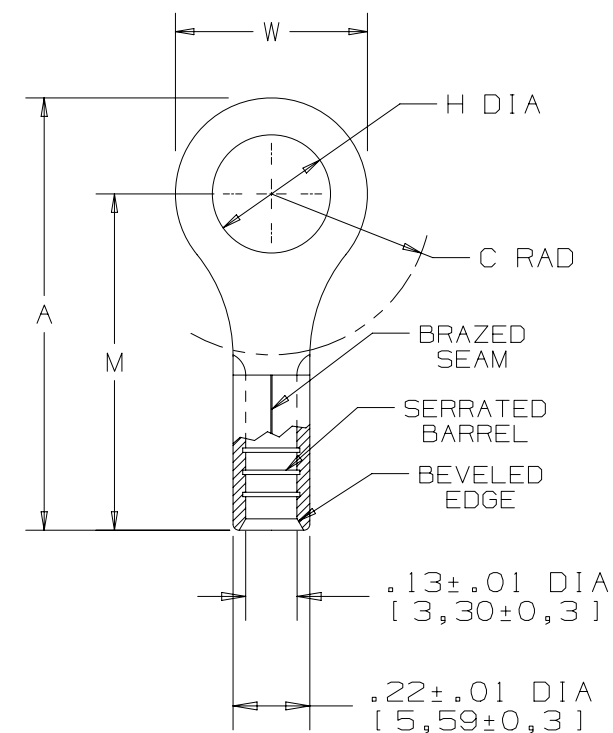

NOTES:

1. UL LISTED FOR:

- A. #14-10 AWG SOLID OR STRANDED COPPER WIRE
- B. 650°F [343°C] MAX TEMP RATING
- C. 2000 VOLTS MAX

2. MATERIAL:

- A. STAMPING - .04" [1,02] THK COPPER, NICKEL PLATED

3. SEE www.panduit.com FOR PACKAGE QUANTITIES

4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS

5. WIRE STRIP LENGTH: $9/32" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]

TITLE		#14-10 BARREL NON INSULATED RING TONGUE, HIGH TEMPERATURE, 650° F	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N41267BA/03	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			
.X ± .XXX ± .XX ± ANGLES ±			
		THIRD ANGLE PROJECTION	
DRAWN BY		EJD	
DATE			
CHK			
SCALE		N/A	
MATERIAL:		SEE NOTES	
DRAWING NUMBER:		A41267	
REV		SHT 1 OF 1	
DATE		A	
BY			
CHK			
APR			
DESCRIPTION		ECN	