

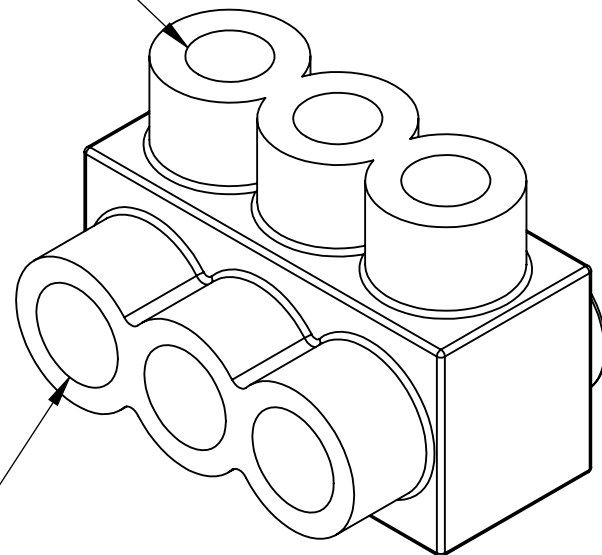


CLAMPLING SCREW
ACCESS PORT (TYP.)

CONDUCTOR
PORT (TYP.)

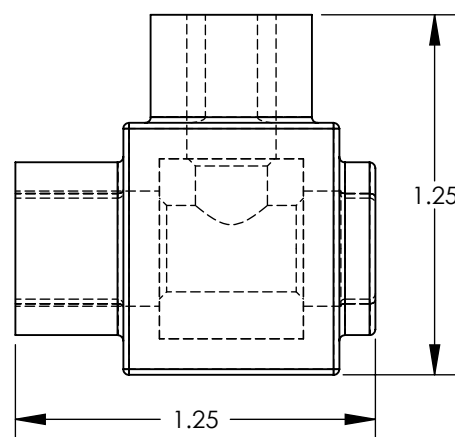

PANDUIT FINISHED GOODS P/N	CONDUCTOR RANGE	HEX KEY	SCREW QTY.	CAP (SCREW PORT) QTY.	CAP (WIRE PORT) QTY.	A	L	N	TIGHTENING TORQUE
PCSB210-2S-6	# 210 - # 14 STR # 10 - # 14 SOL	3/16	2	2	2	1.52	1.265	2	12.0 in/lb
PCSB210-3S-6Y		3/16	3	3	3	2.19	1.937	3	
PCSB210-4S-6Y		3/16	4	4	4	2.86	2.609	4	
PCSB210-5S-4Y		3/16	5	5	5	3.53	3.281	5	
PCSB210-6S-4Y		3/16	6	6	6	4.20	3.953	6	
PCSB210-8S-3Y		3/16	8	8	8	5.55	5.297	8	
PCSB210-10S-2Y		3/16	10	10	20	6.89	6.641	10	
PCSB210-12S-1Y		3/16	12	12	24	8.24	7.985	12	
PCSB210-14S-1Y		3/16	14	14	28	9.58	9.329	14	

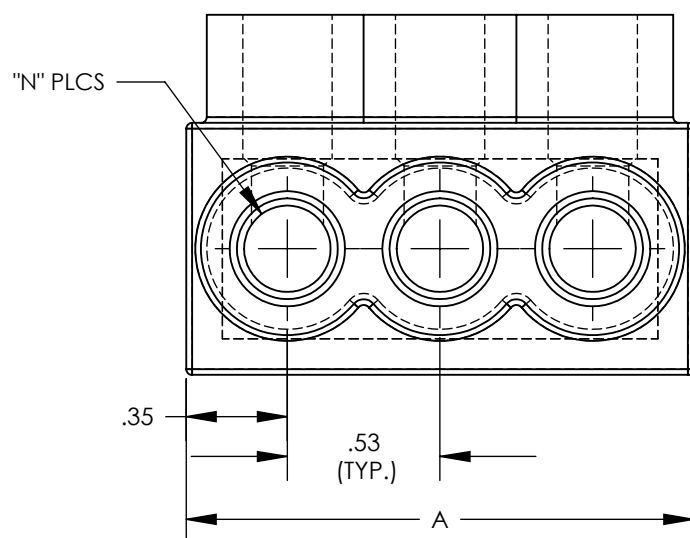

1. UL486A-UL486B LISTED, DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4

3. STRIP LENGTH: .63 +.06/-0

4. FOR TIGHTENING TORQUE SEE TABLE

5. VOLTAGE RATING: 600 V. MAX. BUILDING WIRE,
1000 V. MAX. IN SIGNS & FIXTURES.

6. TEMPERATURE RATING: 90 °C (CU9AL).

7. CONNECTOR BLOCK BODY ARE MADE FROM ALUMINUM.
CONDUCTOR PORTS IN CONNECTOR BLOCK
ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.

8. CONNECTOR TO INCLUDE TIN PLATED ALUMINUM CLAMPING SCREWS FOR EACH CONDUCTOR PORT.

9. INSULATION MATERIAL IS CLEAR PVC.


10. CLAMPING SCREW ACCESS PORTS AND ALL WIRE ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.

11. ALL DIMENSIONS SHOWN ARE NOMINAL.

12 ONLY ONE CONDUCTOR PER PORT ALLOWED.

13 PACKAGE QTY: -12 = 12 PCS.
-6 = 6 PCS.
-4 = 4 PCS.
-3 = 3 PCS.
-2 = 2 PCS.

14 THIS PART IS RoHS COMPLIANT

						TITLE	MULTI-TAP INSULATED CONNECTORS PCSB2/0 SERIES SINGLE SIDED CUSTOMER DRAWING					
						ITEM REVISION NAME	N41523BB-C41523/06	PANDUIT				
						DATASET FILE NAME	C41523/06.SLDDRW					
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]						
						.X ± .XX ± .02	.XXX ± ANGLES ±					
06	2/13	JHNU	JHNU	RGB	REVISED TITLE BLOCK	N41523BB-C41523		THIRD ANGLE PROJECTION	MATERIAL	SEE NOTES		
									DRAWING NUMBER	C41523_06		
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY	DATE	CHK	SCALE	SHEET 1 OF 1	SIZE
							MS	8/99	RLS	NONE		B