




### Pan-Ty® Cable Ties – HALAR<sup>▲</sup> – Distinctive Maroon Color

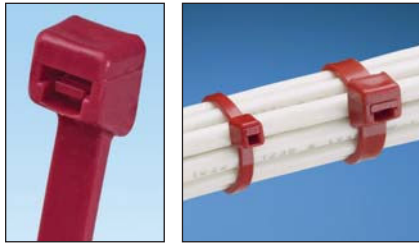

- UL Listed for use in plenum or air handling spaces per NEC, Section 300-22 (C) and (D)
- Low smoke density and excellent flammability rating of UL 94V-0

- Commonly accepted solution for bundling qualified cable without conduit in air handling space applications
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation



| Part Number | Length |    | Width |    | Thickness |    | Max. Bundle Dia. |    | Min. Loop Tensile Str. |   | Recommended Installation Tool | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--------|----|-------|----|-----------|----|------------------|----|------------------------|---|-------------------------------|----------------|----------------|
|             | In.    | mm | In.   | mm | In.       | mm | In.              | mm | Lbs.                   | N |                               |                |                |

#### Miniature Cross Section – Plenum-Rated

|                    |     |     |      |     |      |     |     |    |    |    |                                  |     |      |
|--------------------|-----|-----|------|-----|------|-----|-----|----|----|----|----------------------------------|-----|------|
| <b>PLT1M-C702Y</b> | 4.0 | 102 | .098 | 2.5 | .043 | 1.1 | 2.5 | 22 | 18 | 80 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 100 | 1000 |
|--------------------|-----|-----|------|-----|------|-----|-----|----|----|----|----------------------------------|-----|------|


#### Standard Cross Section – Plenum-Rated

|                    |      |     |      |     |      |     |      |    |    |     |  |     |      |
|--------------------|------|-----|------|-----|------|-----|------|----|----|-----|--|-----|------|
| <b>PLT2S-C702Y</b> | 7.4  | 188 | .190 | 4.8 | .055 | 1.4 | 1.88 | 48 | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 100 | 1000 |
| <b>PLT3S-C702Y</b> | 11.6 | 295 | .190 | 4.8 | .055 | 1.4 | 3.00 | 76 | 50 | 222 |  | 100 | 1000 |

▲HALAR is a registered trademark of Solvay Solexis, Inc.



### Pan-Ty® Clamp Ties – Nylon 6.6

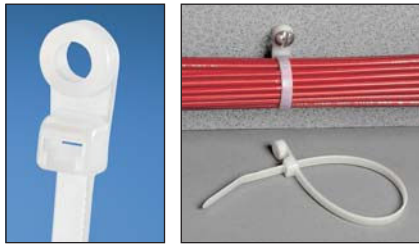

- Used to secure a cable bundle to another surface such as a control panel, communication rack, wall, or ceiling
- Design allows for bundling before or after screwing clamp in place

- One-piece construction for consistent performance and reliability
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation



| Part Number | Length |    | Width |    | Thickness |    | Nominal Hole Dia. |    | Screw Size | Screw Size Metric | Max. Bundle Dia. |    | Min. Loop Tensile Str. |   | Recommended Installation Tool | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--------|----|-------|----|-----------|----|-------------------|----|------------|-------------------|------------------|----|------------------------|---|-------------------------------|----------------|----------------|
|             | In.    | mm | In.   | mm | In.       | mm | In.               | mm |            |                   | In.              | mm | Lbs.                   | N |                               |                |                |

#### Miniature Cross Section – Plenum-Rated

|                   |     |     |       |     |       |     |       |     |    |      |      |    |    |    |                                  |     |      |
|-------------------|-----|-----|-------|-----|-------|-----|-------|-----|----|------|------|----|----|----|----------------------------------|-----|------|
| <b>PLC1M-S4-C</b> | 4.3 | 109 | 0.100 | 2.5 | 0.045 | 1.1 | 0.122 | 3.1 | #4 | M2.5 | 0.75 | 19 | 18 | 80 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 100 | 1000 |
|-------------------|-----|-----|-------|-----|-------|-----|-------|-----|----|------|------|----|----|----|----------------------------------|-----|------|

#### Intermediate Cross Section – Plenum-Rated

|                     |     |     |       |     |       |     |       |     |    |    |      |    |    |     |                                  |     |      |
|---------------------|-----|-----|-------|-----|-------|-----|-------|-----|----|----|------|----|----|-----|----------------------------------|-----|------|
| <b>PLC1.5I-S8-C</b> | 6.1 | 155 | 0.135 | 3.4 | 0.045 | 1.1 | 0.174 | 4.4 | #8 | M4 | 1.25 | 32 | 40 | 178 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 100 | 1000 |
|---------------------|-----|-----|-------|-----|-------|-----|-------|-----|----|----|------|----|----|-----|----------------------------------|-----|------|

#### Standard Cross Section – Plenum-Rated

|                    |      |     |       |     |       |     |       |     |     |    |      |     |    |     |  |     |      |
|--------------------|------|-----|-------|-----|-------|-----|-------|-----|-----|----|------|-----|----|-----|--|-----|------|
| <b>PLC2S-S6-C</b>  | 7.9  | 201 | 0.190 | 4.8 | 0.047 | 1.2 | 0.148 | 3.8 | #6  | M3 | 1.84 | 47  | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 100 | 1000 |
| <b>PLC2S-S10-C</b> | 7.9  | 201 | 0.190 | 4.8 | 0.047 | 1.2 | 0.200 | 5.1 | #10 | M5 | 1.84 | 47  | 50 | 222 |  | 100 | 1000 |
| <b>PLC3S-S10-C</b> | 12.0 | 305 | 0.190 | 4.8 | 0.052 | 1.3 | 0.200 | 5.1 | #10 | M5 | 3.00 | 76  | 50 | 222 |  | 100 | 1000 |
| <b>PLC4S-S10-C</b> | 15.0 | 381 | 0.190 | 4.8 | 0.052 | 1.3 | 0.200 | 5.1 | #10 | M5 | 4.00 | 102 | 50 | 222 |  | 100 | 1000 |

#### Light-Heavy Cross Section – Plenum-Rated

|                    |      |     |       |     |       |     |       |     |     |    |      |     |     |     |                                    |    |     |
|--------------------|------|-----|-------|-----|-------|-----|-------|-----|-----|----|------|-----|-----|-----|------------------------------------|----|-----|
| <b>PLC2H-S25-L</b> | 9.0  | 229 | 0.300 | 7.6 | 0.075 | 1.9 | 0.260 | 6.6 | 1/4 | M6 | 2.00 | 51  | 120 | 534 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH | 50 | 500 |
| <b>PLC4H-S25-L</b> | 15.1 | 384 | 0.300 | 7.6 | 0.075 | 1.9 | 0.260 | 6.6 | 1/4 | M6 | 4.00 | 102 | 120 | 534 |                                    | 50 | 500 |