

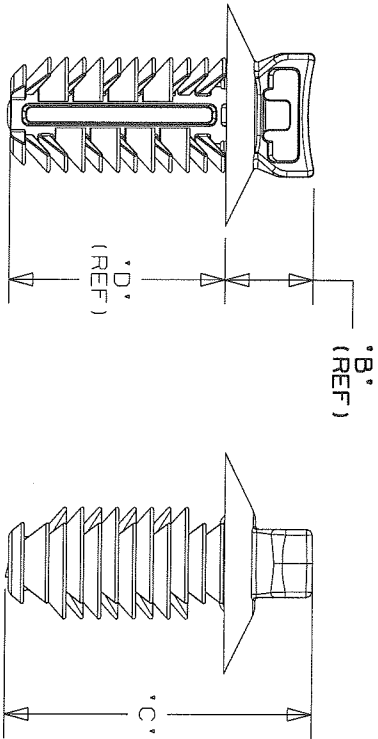


PANDUIT PART NUMBER	USED WITH CABLE TIES	DIMENSIONS				MATERIAL	WEIGHT grams/100pcs
		'A' (REF)	'B' (REF)	'C'	'D' (REF)		
PUM-925--30	M, I, S, LH, H	19.6	6.6	26.7	19.1	HEAT STABILIZED NYLON 6/6 BLACK	116.4

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, AND COLOR.
2. (*) DIMENSIONAL VARIANCE IS POSSIBLE DUE TO MOLDING PROCESS RELATED SINK MARKS.
3. APPLICATION SPECIFICATION:
HOLE DIAMETER: 8.8 - 9.3 mm
PANEL THICKNESS: 1.0 - 16.0 mm

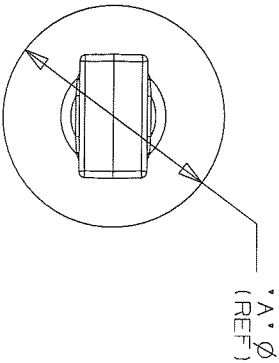

CAD FILENAME/LAYERS

G03151BC_DC_GB0239MQ/09B

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

PUM-925 - .30
PUSH UMBRELLA MOUNT 925

UNLESS OTHERWISE SPECIFIED, ALL
DIMENSIONS ARE METRIC
TOLERANCE: $\pm 0.5\text{MM}$

09B	9-26-08	PSG		ADDED, & RENAMED DIMENSIONS	GB0239MQ	09B	KLN				DIMENSIONS ARE METRIC TOLERANCE : ±0.5MM	SCALE 1.5:1 UNLESS NOTED	DRAWING NO.	DWG
09A	8-22-08	PSG		REMOVED 2 DIM., REMOVED RIB FROM HEAD, UPDATED FILE NAME AND CHANGED REV STYLE	GB0239MQ	09A					MAT'L:	SEE TABLE	GB0239MQ	A
R	12-29-06	TWSA		INITIAL RELEASE	GB0239MQ	R					DRAWN BY TWSA			DWG
REV	DATE	BY	CHK	DESCRIPTION	ECN -	R	CUST	SUP			CHK'D KLN		SIZE	