

What's in the Box?

PART NO.	QTY	DESCRIPTION
DVX-RX200	1	DVX-200 Receiver. DVI Receiver over CAT6 STP
DVX-TX200	1	DVX-200 Transmitter. DVI Transmitter over CAT6 STP
DVI-D Cable	1	6ft MM DVI-D
Power Supply	2	PS5VDC2A
User Manual	1	

Technical Specifications*

VIDEO	
Format	DVI-D Single Link
Maximum Pixel Clock	165 MHz
Input Interface (TX)	(1) DVI-D 29-pin female
Output Interface (RX)	(1) DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @60Hz
DDC	5 volts p-p(TTL)
Input Equalization	Automatic
Input/Output Cable Length	Up to 20 ft.
Extension over Cat6	Up to 225 ft.

OTHER	
Power	External 100-240 VAC/5VDC2A @10W
Dimensions	2.75 in W x 0.8 in H x 3.4 in D
Weight	0.2 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

Supported Resolutions

RESOLUTION	REFRESH RATE
640 x 480	85 Hz
800 x 600	85 Hz
1024 x 768	85 Hz
1152 x 870	75 Hz
1280 x 768	75 Hz
1280 x 960	60 Hz
1280 x 1024	60 Hz
1600 x 1200	60 Hz
1920 x 1200	60 Hz

© Copyright 2010 Smart-AVI, All Rights Reserved

NOTICE


The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For more information, visit www.smartavi.com.

The following is the wiring standard for terminating UTP/STP cable using RJ-45 connector:

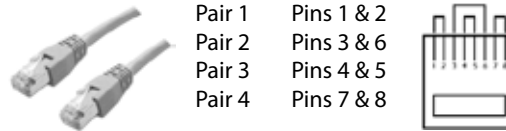

Connectors: RJ-45
 Capacitance: 14 pf/ft (46.2 pf/m)
 Conductor Gauge: 23 AWG
 Impedance: 100 +/- 15 ohms



Installation Manual

DVX-200

DVI-D Extender

up to 225 feet over a Cat6 Cable



The DVX-200 is a DVI-D video extender system (transmitter and receiver) designed to broadcast high-definition DVI-D signals up to 225 feet using inexpensive cabling.



SmartAVI, Inc. / Twitter: @smartavi
 11651 Vanowen St. North Hollywood, CA 91605
 Tel: (818) 503-6200 Fax: (818) 574-5581
<http://www.SmartAVI.com>

www.smartavi.com

Introduction

The DVX-200 is the perfect solution for extending DVI-D signals to a remote location up to 225 feet away over Cat6 23 AWG STP cabling. It is the ideal way to isolate a workstation computer into one location and a console in another. It is fully compatible with MAC, PC and LINUX DVI-D single link standards.

Features

- Supports DVI-D single-link sources
- Supports High Resolution 1920x1200 60Hz WUXGA
- Supports Mac, PC, and Linux DVI
- Distance: 225 feet with Cat6 STP cabling
- Uses universal DVI Single Link connectors
- Zero pixel loss with TMDS signal correction
- DDC from internal table for Mac/PC
- Compatible with all operating systems
- Compatible with all major KVM switches
- Data recovery for digital video
- Supports 1.5 and 12Mbps data rates
- Plug-and-play

Applications

- Medical Applications
- Industrial Work Areas
- Home Theater Integration
- Digital Signage Deployment
- Information Kiosks/Displays
- Film/Recording Studios


DVX-TX200 Front



DVX-TX200 Rear




Product - Installation Diagram

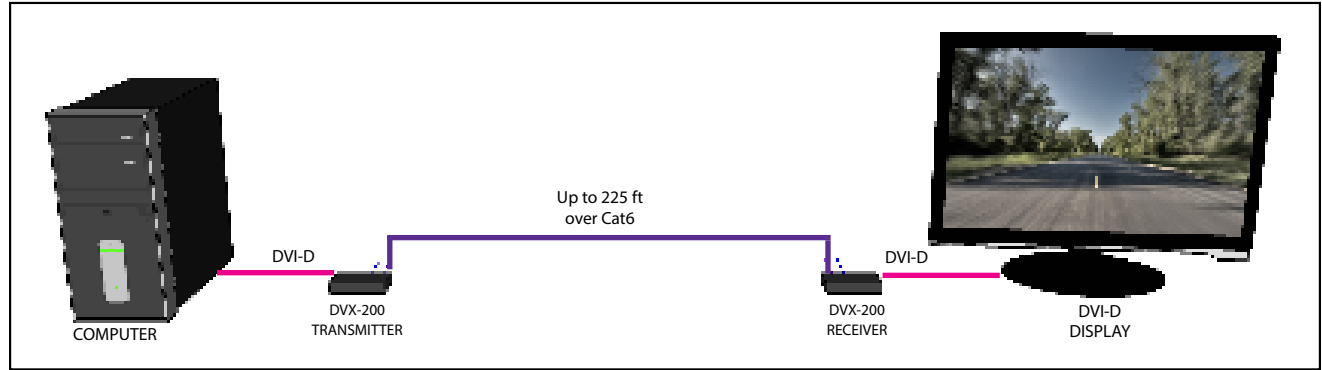

Connecting the DVX-200

1. Power off all devices.
2. Connect a DVI-D source (computer) to the DVI-D port on the rear of the DVX-TX200.
3. Connect the DVX-200-TX to the the DVX-RX200 with one STP (Shielded Twisted Pair) cable.
4. Connect a DVI-D compatible display to the DVI-D port on the rear of the DVX-RX200.
5. Connect the power to the DVX-RX200 and the DVX-TX200.
6. Power on the display and then the computer.

DVI-D Configuration

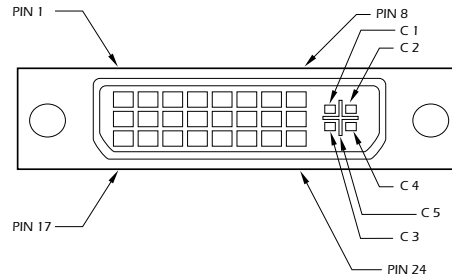


Pin #	Signal	Pin #	Signal
1	T.M.D.S Data 2-	16	Hot Plug Detect
2	T.M.D.S Data 2+	17	T.M.D.S Data 0-
3	T.M.D.S Data 2/4 Shield	18	T.M.D.S Data 0+
4	T.M.D.S Data 4-	19	T.M.D.S Data 0/5 Shield
5	T.M.D.S Data 4+	20	T.M.D.S Data 5-
6	DDC Clock	21	T.M.D.S Data 5+
7	DDC Data	22	T.M.D.S Clock Shield
8	Analog Vert. Sync	23	T.M.D.S Clock+
9	T.M.D.S Data 1-	24	T.M.D.S Clock -
10	T.M.D.S Data 1+		
11	T.M.D.S Data 1/3 Shield	C1	Analog Red
12	T.M.D.S Data 3-	C2	Analog Green
13	T.M.D.S Data 3+	C3	Analog Blue
14	□ □ □ □ □ □	C4	Analog Horz Sync
15	GND	C5	Analog Ground

Setting the DDC

DDC provides plug-and-play capability to your displays. When you plug a display into your computer, the DDC table in the display tells the computer the optimal resolution to use. The DVX-200 is capable of supporting two primary types of displays: PC and Mac. The default setting is PC.

To change this setting, first remove the top cover from the DVX-200 TRANSMITTER by removing the four side screws. Next, locate the DIP switches near the rear of the device next to the Data Port (RJ-45 Ethernet Port).

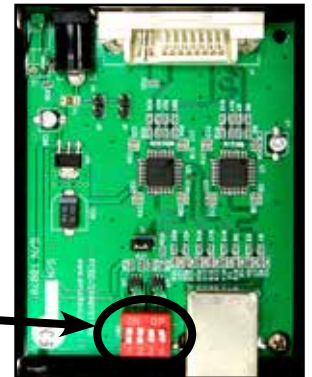

For PC, configure the switches as shown below:



1&2 ON, 3&4 OFF

For Mac, configure the switches as shown below:



1&2 OFF, 3&4 ON