

What's in the Box?

PART NO.	QTY	DESCRIPTION
V2V-D2H-01	1	DVI-D and Audio to HDMI Converter
PS5VDC2A	1	5 Volt 2 Amp Power Supply

Technical Specifications

DVI-D VIDEO	
Format	DVI-D Single Line
Maximum Pixel Clock	165 MHz
Input Interface	DVI-D 29-pin female
Resolution	Up to 1920 x 1200 @60Hz
DDC	5 volts p-p(TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
SPDIF/COAX AUDIO	
Signal Type	DTS-HD/Dolby-trueHD/LPCM7.1/DTS/Dolby-AC3/DSD
Output Interface	(1) SPDIF Optical (1) SPDIF COAX
HDMI VIDEO	
Format	HDMI 1.3b [Deep Color, xvYcc color space supported]
DVI Compliance	Single-link DVI-D 1.1
HDCP Compliance	1.0/1.1
Video Bandwidth	Single-link 340MHz [10.2Gbps]
Resolution	480i,480p,720i,720p,1080i,1080p
Output Interface	(1) HDMI[7.1ch audio & video]
Connector	Type A[19-pin female]
Maximum Distance	25 ft.
OTHER	
Power	External 100-240 VAC/5VDC2A @10W
Dimensions	3.5 in W x 2.75 in H x 1.25 in D
Weight	0.35 lb
Operating Temp.	0-55 °C (32-131°F)
Storage Temp.	-20-85 °C (-4-185 °F)
Humidity	Up to 95%

© Copyright 2012 SmartAVI, All Rights Reserved

NOTICE

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For more information, visit www.smartavi.com.

Rack Mountable Option



Our SmartRack is the perfect solution to allow virtually all SmartAVI devices to be custom mounted in a standard 19" server rack. The SmartRack is fully adjustable and can secure/organize several devices.

Smart-AVI
SMART AUDIO VIDEO INNOVATION

SmartAVI, Inc. / Twitter: smartavi
11651 Vanowen St. North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208
<http://www.SmartAVI.com>

Smart-AVI
SMART AUDIO VIDEO INNOVATION

V2V FAMILY

Installation Manual

V2V-D2H-01



DVI-D and Digital Audio to HDMI Converter



www.smartavi.com

Introduction

The V2V-D2H-01 Converts DVI-D Video with S/PDIF Stereo Digital Audio to HDMI.


Features

- Converts One DVI+ SPDIF input signal to one HDMI 1.1 signal
- Supports DVI-D input
- Supports audio SPDIF input
- HDMI output : Supports up to 1080p/60HZ, same format as input
- HDCP 1.1 protocol compliant
- Supports CEC
- Audio formats supported : DTS-HD/Dolby-trueHD/LPCM7.1/DTS/Dolby-AC3/DSD
- LED indication
- Supports output up to 60 feet over AWG26 cable
- No loss of quality
- Installs in minutes

Applications

- Home Theater
- PC Networking
- Conference Center Systems
- Point of Sale
- Camera Surveillance
- Video Phone
- Control Room Systems
- Recording Studios

Product - Installation Diagram

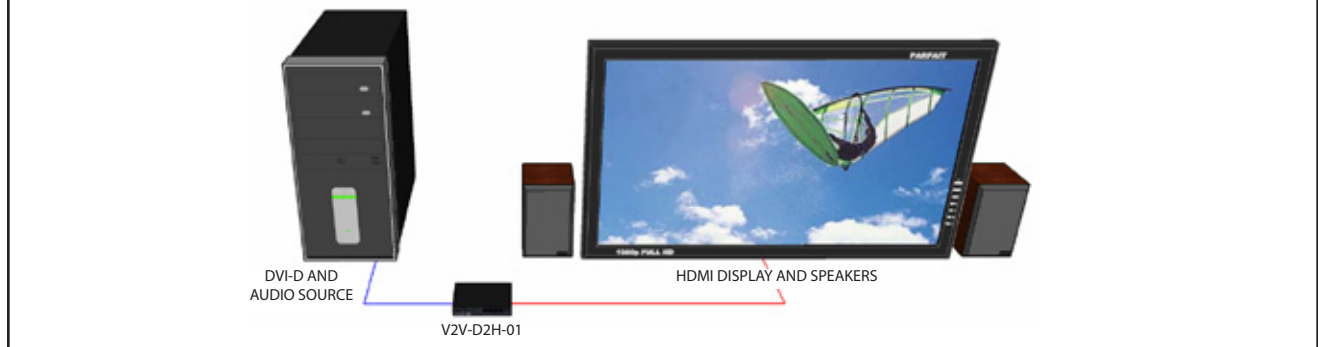

Installation

1. Connect a DVI input device to the DVI input on the V2V-D2H-01.
2. Connect a digital audio input device.
3. Connect a digital audio output device.
4. Connect an HDMI display to the HDMI output on the V2V-D2H-01.
5. Connect the power cord to the V2V-D2H-01.
6. Power on the input devices and the display.

V2V-D2H-01 Front



V2V-D2H-01 Rear



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com