
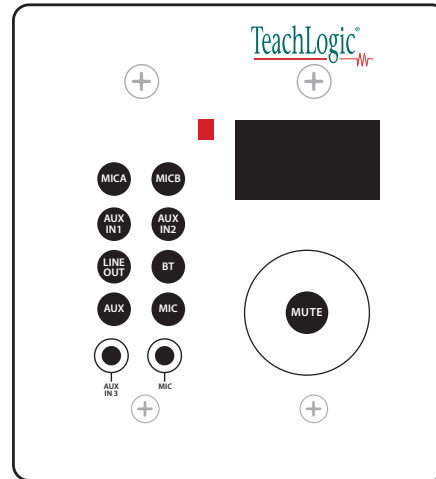


Amplifier/Receiver

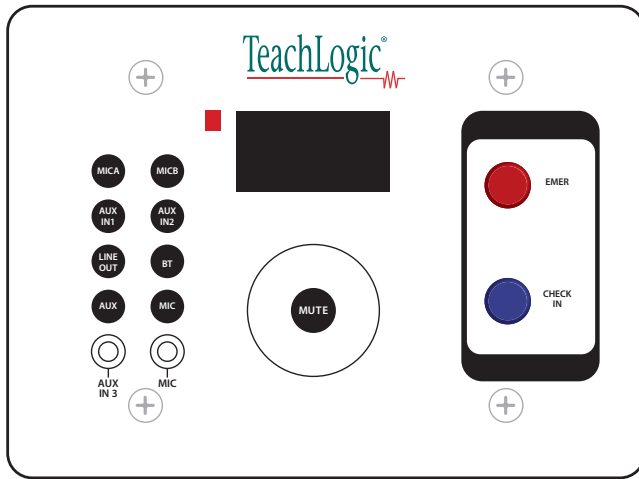

CPS-120/CPR-125

Wall panel controller for Matrix™ amplifier

Specifications

| | CPR-125 | CPS-120 |
|--------------------|---|-------------------------------|
| Mic A | Microphone A select | Microphone A select |
| Mic B | Microphone B select | Microphone B select |
| Line In 1 | Line input 1 select | Line input 1 select |
| Line In 2 | Line input 2 select | Line input 2 select |
| Line Out | Line output select | Line output select |
| BT | Bluetooth select | Bluetooth select |
| Aux In 3 | Auxiliary Input 3 select | Auxiliary Input 3 select |
| Mic | Microphone Input select | Microphone Input select |
| Mute | Audio Mute button | Audio Mute button |
| Aux In 3 | Auxiliary input jack (3.5mm) | Auxiliary input jack (3.5mm) |
| Mic | Microphone input jack (3.5mm) | Microphone input jack (3.5mm) |
| Emer | Emergency alert button | |
| Check In | Check in button | |
| Display | LCD display | LCD display |
| Panel Connector | RJ-45 jack | RJ-45 jack |
| Cat 5 Connectivity | 45 ft between Matrix amplifier and controller | |
| Dimensions | 4.75"W x 6.5"H x 1 7/8"D | 4.75"W x 4.75"H x 1.975"D |
| Weight | 9 oz | 8 oz |

Features

- Standard surface mount box included

CPS-120

- Fits into a standard 2-Gang low voltage trim ring for flush mounting

CPR-125

- Fits into a standard 2-Gang low voltage trim ring for flush mounting