

3375 Fox & Hound Jr Compact Tone & Probe Kit

Pocket sized tone generator and inductive amplifier probe


Features:

- The Fox and Hound Jr wire tracing kit is ideal for security, thermostat, data, telephone, audio and other types of wiring
- The toner generates a warble tone with a user adjustable pitch
- Adjustable sensitivity/volume control with visual signal strength indicator
- Non-conductive probe tip
- LED that can detect trace tones up to 12" away
- Built-in earphone jack that will automatically mute the loudspeaker for use in quiet or noisy areas
- Power beeper reminds user that the unit is on
- Connects easily using alligator clips or RJ-11 / RJ-45 combo plug and has 120VAC line cross protection
- Complete with (2) A23 batteries and case
- 1 year warranty




Specifications

Fox Jr	
Output Frequency	800kHz to 5kHz
Frequency Adjustment	Thumbwheel
Output Voltage	6vpp square wave (open circuit)
Tracer Tone	Warble
Max. AC/DC Live Voltage	120V
Connections	Alligator Clips and RJ11/RJ45 combo modular plug
Lead Length	4"
Battery	12V (A23)
Dimensions	5.8 x 1.25 x 0.8" (147 x 31.8 x 20.3mm)
Weight	1.6oz (45.4g)
Hound Jr	
Probe	Non-conductive, insulated
Sensitivity	Adjustable with thumbwheel (detects Fox Jr up to 12" away)
Signal Strength Indicator	Bright red dual LED visual signal strength indicator and speaker
Earphone Jack	Accepts 1/8" mono or stereo earphone plug (mutes speaker)
Battery	12V (A23)
Power On Reminder	Hound Jr beeps and flashes periodically
Dimensions	5.8 x 1.25 x 0.8" (147 x 31.8 x 20.3mm)
Weight	1.6oz (45.4g)

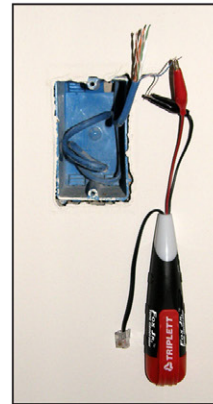

Alligator clips for easy toning of any 2 pair

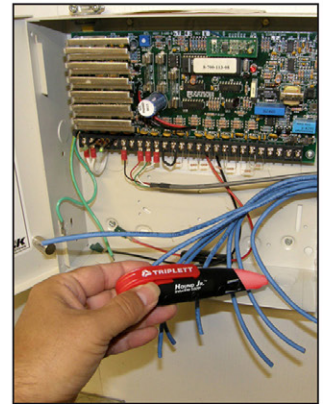

Signal strength LED to help determine proper cable location in a bundle

Ordering Information:

3375 Fox & Hound Jr Compact Tone & Probe Kit