

322610

Leakage Current Tester



SPECIFICATIONS

Ranges: DC current . . . 0.1, 1, 10mA, AC current . . . 0.1, 1, 10mA, (DC + AC) current . . . 0.1, 1, 10mA, AC Voltage . . . 150, 300V (50 and 60 Hz)

Accuracy: $\pm 2.5\%$ of full scale value on current and voltage ranges

Input Impedance: Current range: 1k Ω , 1.5k Ω , and 2k Ω
Voltage range: More than 100k Ω

Frequency Range: 20 Hz to 5 kHz

Power Source: Two 9V dry cells (JIS C8501 Type 006P or NEDA 6F22), Continuous Operating Time: Approx. 290 hours

Overload Protection: Up to 30mA AC for one minute will not damage instrument on current ranges

Temperature Influence: $\pm 0.2\%$ of rated value/ $^{\circ}\text{C}$ against temperature variation of $20 \pm 10^{\circ}\text{C}$

Insulation Resistance: More than 100M Ω at 1,000V DC between electrical circuit and case

Dielectric Strength: 1,500V AC 50Hz for one minute between electrical circuit and case

Dimensions: Approx. 190 x 124 x 90mm (7.48 x 4.88 x 3.54) not including handle

Weight: Approx. 1.0 kg (2.2 lbs)

Accessories supplied at no extra cost:

Test Lead (B9646CM, 289803) 1 pc.
Instruction Manual 1 copy
Carrying Case, (B9646BU, 322400) 1 pc.

Optional Accessories:

322710 Test Box

Handy Universal Tester for Checking Electrical Appliances

FEATURES

- Three input resistance ranges — 1, 1.5 and 2 k Ω
- Four functions — AC current, DC current, DC + AC current and AC voltage measurements
- $\pm 2.5\%$ full scale accuracy
- 100 μA full scale value
- Shockproof indicator using taut band movement
- Built-in overload protection circuit
- Handy and easy to carry
- Shielded case, resistant to high-frequency fields

EXAMPLES OF APPLICATION AREAS

- **Electrothermal appliances**
Room heating (electric stove), cooking (toaster), hair-dressing (electric curling iron, hair dryer and curlers).
- **Motor operated appliances**
Electric fan, floor polisher, washing machine, electrical pump, refrigerator, electric drill, vending machine, lawn mower, and electrical toys.
- **Light source appliances**
Duplicator, projector, photographic enlarger, and electrical disinfectant.
- **Electronic appliances**
TV receiver, microwave ranges, and high-frequency welding machine.
- **Other appliances**
Burglar alarm, medical and dental equipment, noise suppressor, and portable generator.

322710 TEST BOX

A switch box to facilitate the measurement of leakage currents. A simple switch operation reverses the polarity of the voltage applied to the appliance being tested by the Type 3226.

Current Capacity: 10A AC (125V).

Contact Resistance: Less than 0.005Ω.

Insulation Resistance: More than 100 MΩ at 500V DC between electric circuit and case.


Dielectric Strength: 1,000V AC for one minute between electric circuit and case.

Dimensions: Approx. 70x159x50mm (2.76x6.26x1.97")

Weight: Approx. 0.6 kg (1.3 lbs).



DIMENSIONS

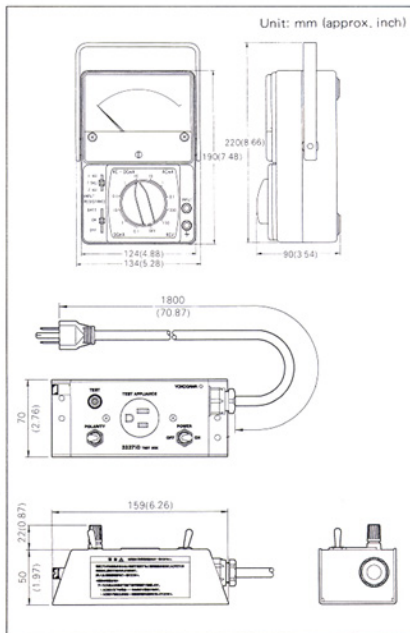

Ordering Information

When ordering or requesting quotations, specify:

1. Instrument name and type number
2. Optional accessories, if required

YOKOGAWA ◆
Yokogawa M&C Corporation

World Wide Web site at
<http://www.yokogawa.com/MCC>

YOKOGAWA M&C CORPORATION
International Sales Dept.

2-9-32 Nakacho, Musashino-shi, Tokyo, 180-8750 Japan
Phone: +81-422-52-5716 Facsimile: +81-422-55-8954

YOKOGAWA CORPORATION OF AMERICA (U.S.A.)
YOKOGAWA EUROPE B.V. (THE NETHERLANDS)
YOKOGAWA ENGINEERING ASIA PTE. LTD. (SINGAPORE)
YOKOGAWA AMERICA DO SUL LTDA (BRAZIL)
YOKOGAWA MEASURING INSTRUMENTS KOREA CORPORATION (KOREA)
YOKOGAWA AUSTRALIA PTY. LTD. (AUSTRALIA)
YOKOGAWA BLUE STAR LTD. (INDIA)
YOKOGAWA MIDDLE EAST E.C. (BAHRAIN)
LTD. YOKOGAWA ELECTRIC (RUSSIAN FEDERATION)

Phone: +1-770-253-7000
Phone: +31-334-64-1611
Phone: +65-6241-9933
Phone: +55-11-5681-2400
Phone: +82-2-551-0660
Phone: +61-2-9805-0699
Phone: +91-80-227-1513
Phone: +973-352100
Phone: +7-095-737-7868

Facsimile: +1-770-251-2088
Facsimile: +31-334-64-1610
Facsimile: +65-6241-2606
Facsimile: +55-11-5681-2744/434
Facsimile: +82-2-551-0665
Facsimile: +61-2-9888-1844
Facsimile: +91-80-227-4270
Facsimile: +973-336100
Facsimile: +7-095-737-7869

NOTICE

- Before using the product, read the instruction manual carefully to ensure proper and safe operation.

Represented by:

MCK-ES10