

# DT SERIES, TEMPERATURE COMPENSATED DC Current Transducers

The DT Series of Temperature Compensated DC Current Transducers is ideal for energy management system inputs where the controller is designed to accept 333 mV signals, commonly found in power monitoring applications. Other output options available are a 0–5 VDC signal used in building energy management systems or a 0–10 VDC signal seen more often in industrial controllers. Additionally, this series features a patent-pending method that improves the sensor accuracy as the ambient temperature changes. The sensor output is automatically adjusted as the temperature increases or decreases, eliminating one of the biggest issues with Hall effect based products.

## DC Current Transducer Applications

### Photovoltaic Panel Output Measurement

- The sensor output rises and falls as the panel produces more or less power.


### DC Motors

- Detects jams and overloads.
- Provides early notification of impending bearing failure.

### Electrical Heaters

- Detects open or shorted elements quickly.

### Photovoltaic Panel Output Measurement

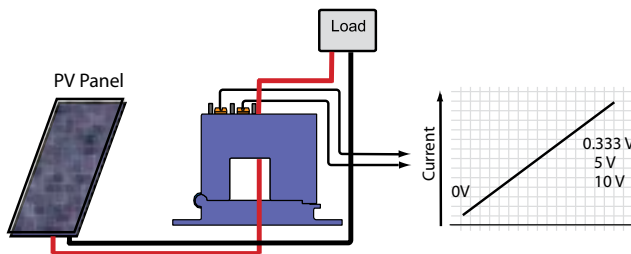

The DT sensor will produce a signal directly proportional to the current produced by the panel or string of panels, with an output to match the controller being used.

- For additional Application Examples, go to [www.nktechnologies.com/applications](http://www.nktechnologies.com/applications)

OEMs

### Test & Evaluation Units for OEMs

Free program expedites evaluation process. See page 1 for details.



Patent-pending temperature compensation design.

## DC Current Transducer Features

### Voltage Output

- 333 mVDC, 5 or 10 VDC proportional to DC current.
- Compatible with many monitoring systems.

### 5 VDC Powered

- Use with data collection systems.
- Available with 333 mVDC output.

### 12 VDC Powered

- Available with 0.333, 5 or 10 VDC output.

### Ranges to Suit Your Needs

- 0–50 A DC.
- 0–100 A DC.

### Temperature Compensated

- Remains accurate with rise or fall of ambient temperature.

### Built-in Mounting Feet

- Simple, two-screw panel mount or attach with optional DIN rail brackets.\*

### Split-core Case


- Open to snap the sensor over existing conductor; no need to disconnect the load to install.

### Designed for UL, CUL and CE Approval


- Accepted worldwide.

\*For information on the DIN rail accessories kit, see page 113.


## DC Current Transducer Dimensions

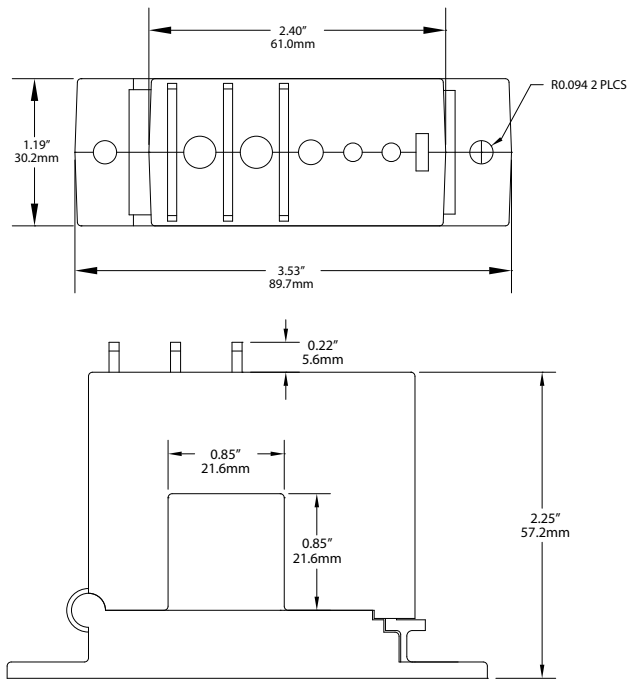

## DC Current Transducer Connections

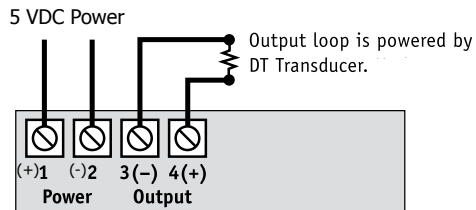

## DC Current Transducer Output Type

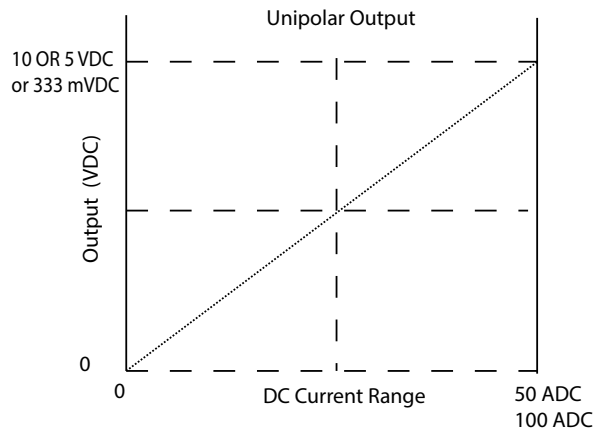

Output remains accurate even as the temperature rises and falls from -20°C to +50°C (-4 to +122 °F) with our patent pending design.

## DC Current Transducer Specifications

<b>Power Supply</b>	5-6 VDC (5.1–5.9 VDC recommended)	12 VDC (11.5–13.2)
<b>Output</b>	0–333 mVDC	0–5 VDC or 0–10 VDC
<b>Response Time</b>	400 ms (90% step change)	
<b>Consumption</b>	< 8.5mA (no load) (333 mVDC output)	n/a
<b>Output Loading</b>	50 ohm minimum, 20 mA maximum (333 mVDC)	10K ohm minimum (0–5 or 0–10 VDC output)
<b>Accuracy</b>	1% Full Scale, across temperature range	
<b>Isolation Voltage</b>	Tested to 5000 VAC	
<b>Frequency Range</b>	DC	
<b>Sensing Aperture</b>	0.85" (21.6mm) sq	
<b>Case</b>	UL94 V0 Flammability Rated	
<b>Environmental</b>	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing	
<b>Listings</b>	Designed to comply with UL 508	

## DC Current Transducer Ordering Information

Sample Model Number: DTB-333-05D-U-SP  
Split-core DC current transducer, 0–50 A range, 0–333 mVDC, 5 VDC powered, unipolar output.

DT (1) - (2) - (3) - (4) - (5)  
DT B - 333 - 05D - U - SP

## (1) Range

B	0–50 A
C	0–100 A

## (2) Output Signal

333	333 mVDC
005	5 VDC
010	10 VDC

## (3) Power Supply

05D	5 VDC (0–0.333 VDC output only)
12D	12 VDC (0–0.333, 0–5 or 0–10 VDC output only)

## (4) Signal Response Type

U	Unipolar (Output with current in one direction only)
---	--

## (5) Case Style

SP	Split-core
----	------------