

Keysight Technologies

N9923A FieldFox Handheld RF Vector Network Analyzer

4/6 GHz

Technical Overview



Unlocking Measurement Insights

World's Most Accurate Handheld Vector Network Analyzer

FieldFox

The first step in ensuring that wireless communication systems are running at their optimum level is to verify that RF components in the system, such as cables, antennas, and filters are properly tested and kept in good condition. The majority of these tests are conducted in the field or in a warehouse, where bench top instruments are not readily available, testing space is limited, or where a power source is simply not available. The Keysight Technologies, Inc. handheld FieldFox RF Vector Network Analyzer (VNA) is designed to make network analysis measurements in the field easier, convenient, and the most reliable.

QuickCal revolutionizes calibration in the field

The number one challenge in making accurate network analyzer measurements in the field is reliability, where large temperature fluctuations are common. Keysight's FieldFox RF VNA is the only handheld network analyzer with *QuickCal* technology that allows operators to easily correct for drift errors caused by temperature changes. *QuickCal* is a built-in calibration system that provides worry-free accuracy and reliability. FieldFox's built-in standards make calibration simpler, by eliminating the need to carry mechanical calibration kits into the field.

Unmatched reliability for day-to-day tests

Whether you are testing a flight line for the air force, an RF system on a war ship, a wireless communication cable and antenna system, tuning RF components, or making other general purpose network analyzer measurements – the FieldFox RF VNA provides unmatched measurement reliability, stability, and efficiency for your every day test needs. The FieldFox RF VNA also builds on Keysight's 40-year legacy of network analysis leadership in calibration, accuracy, and innovation.



Key measurements

- Full 2-port S-parameters, magnitude and phase
- Time domain with gating
- Full 2-port Cal, TRL, QuickCal
- Cable and antenna test, distance-to-fault, return loss
- Vector voltmeter, 1- and 2-channel
- Power measurements with USB power sensor
- Pulse measurements with USB peak power sensor

Key differentiators

- Built-in QuickCal enables calibration without a cal kit
- Best measurement stability over time and temperature
- Industry's only handheld network analyzer with MIL PRF 28800F Class 2 compliance with no exceptions
- Easy-to-use, task-driven user interface
- Weather resistant, compact, and field-friendly design, no fan and vents
- Remote control via iOS device



Pick up FieldFox for its ergonomics



...and depend on its durability and convenience



Connector bay protects RF connectors

Test Port 1

External reference and external trigger

Test Port 2

Spacious connector design makes connections fast and simple

Quick-connect shoulder strap clips



Keep going with field-swappable batteries that last up to 3.5 hours

LAN port for data transfer, SCPI programming and remote control from iOS device

Micro SD flash card slot for additional data storage

Headphone jack

Mini USB port connection to PC for SCPI programming!

Gasketed doors protect ports from moisture

USB ports for data transfer, GPS receiver, and USB power sensors

1. SCPI over USB is only available for N9923A with serial number prefix starting with MY5607/SG5607/US5607 and N9923A upgraded with Option N9910HU-500.

Key Measurements

Vector Network Analysis



The base FieldFox RF VNA provides transmission/reflection (T/R) measurements, or S11 and S21, with magnitude and phase.

Adding Option 122 (full 2-port S-parameters) brings new levels of accuracy and convenience for testing RF components. A full 2-port network analyzer lets you measure the forward and reverse characteristics of your components without having to disconnect, turn around, and reconnect them to the analyzer.


It also provides full 2-port calibration to give you the best measurement accuracy possible. Depending upon your application, you can choose the optimum performance level of an S-parameter analyzer (Option 122) or transmission reflection analyzer (base model).

You also can simultaneously measure and view all four S-parameters, with a single connection.

FieldFox VNA contains four independent, sensitive receivers. The receivers provide more than 100 dB of dynamic range for vector measurements of high rejection, narrowband devices such as RF filters. The receivers also make possible full 2-port error correction with the Unknown Thru method, allowing you to measure non-insertable devices.

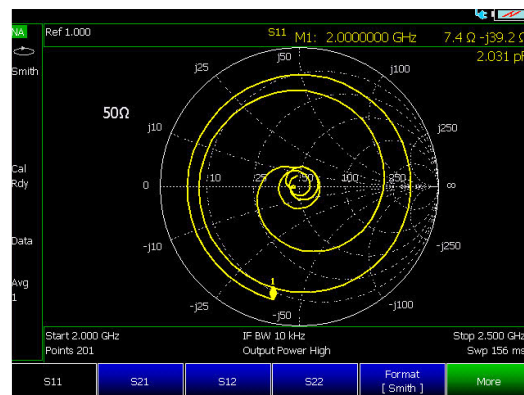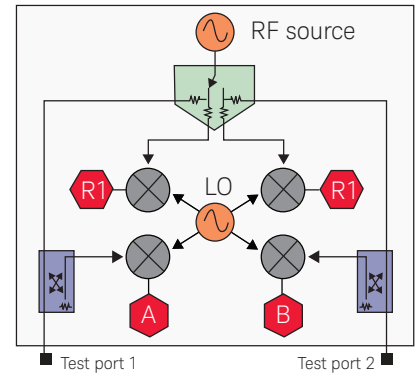

Smith chart display

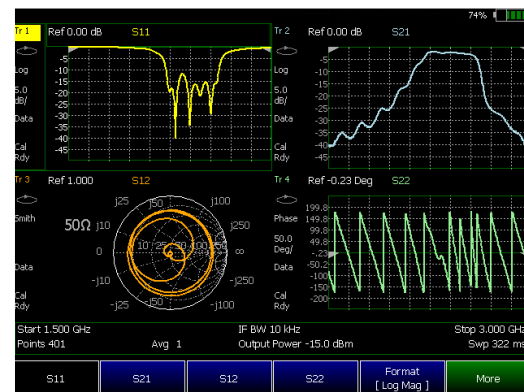

Make multiple measurements simultaneously

Key Measurements (continued)

Cable and antenna analyzer


Fifty to sixty percent of cell site problems are caused by faulty cables, connectors, and antennas. Degraded feed lines cause poor coverage, unnecessary handovers, paging failures and access failures on the uplink. To avoid service quality problems, it is critical to keep the cell sites' cable and antenna systems in good condition.

Use FieldFox to make return loss, VSWR, insertion loss/transmission, one-port cable loss, and distance-to-fault (DTF) measurements. You can test antennas, cables, filters, and amplifiers with a single handheld instrument.


Return loss and DTF measurements

FieldFox can make return loss and distance-to-fault measurements at the same time. It helps you correlate overall system degradation with specific faults in the cable and antenna system.

The built-in cable editor allows you to edit existing cable types on-site, and save them as new cable types with user defined names.

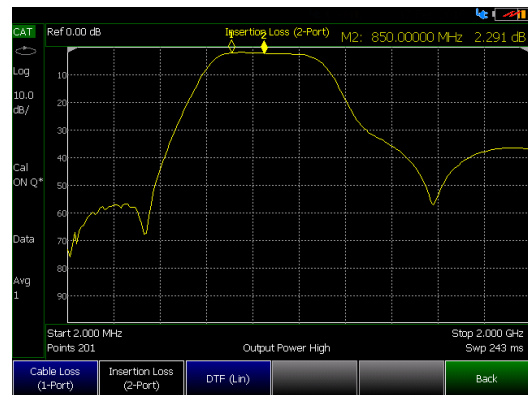

Insertion loss display

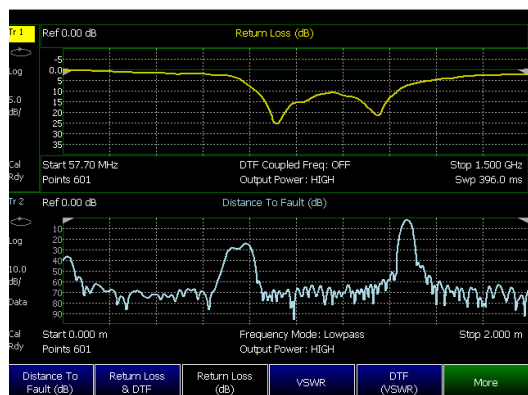

View and control the return loss and DTF displays independently



CalReady when the instrument is turned on

Save time and get right to work with FieldFox's CalReady feature, which makes the unit calibration ready at either test port immediately following power on or preset. FieldFox is already calibrated and ready to make measurements such as S11, S22, 1-port cable loss, VSWR, return loss, and DTF measurements at the test port without having to connect/disconnect additional cables or calibration devices.


Industry's first and only QuickCal

FieldFox is the industry's first and only handheld network analyzer with a built-in calibration capability that allows you to calibrate the network analyzer without carrying a calibration kit into the field. As with any test instrument, when you add an additional device to the test port, such as a jumper cable or adapter, you need to recalibrate using a calibration kit (cal kit). *QuickCal* eliminates the need to carry and use a cal kit, and also provides worry-free accuracy and excellent reliability. *QuickCal* allows the operator to easily correct drift errors caused by temperature changes during instrument operation.

The FieldFox RF VNA's full 2-port *QuickCal* supports measurements such as transmission/reflection, S21, S12, S11, S22, 1-port cable loss, VSWR, return loss, DTF, and gain/insertion loss. Full 2-port *QuickCal* is based on Keysight's Unknown Thru calibration methodology, providing an accurate way to measure a non-insertable device, such as a female-female filter.

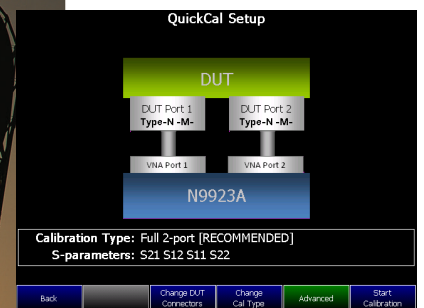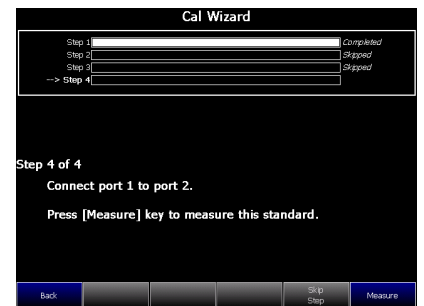

Calibration Wizard

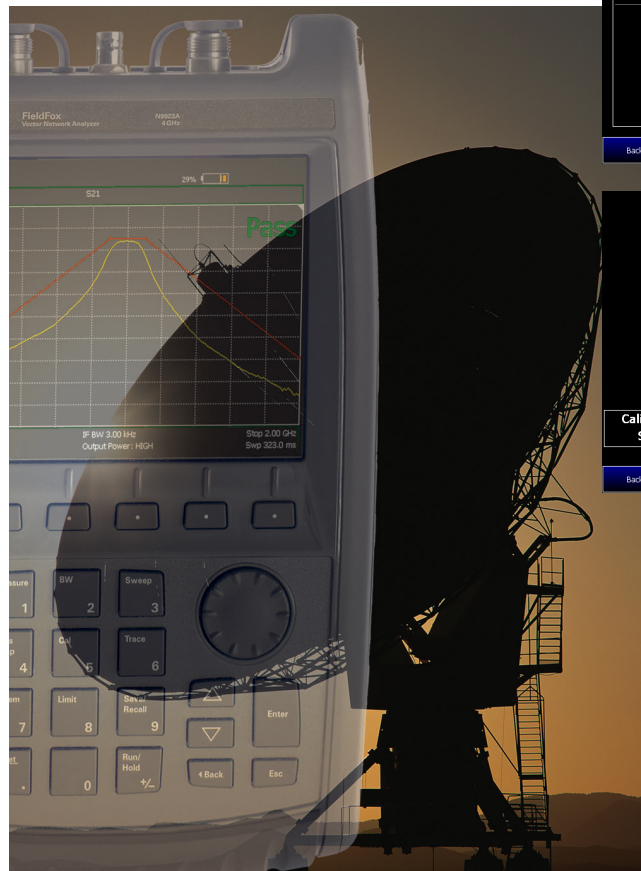


Broadband calibration

FieldFox allows you to make broadband calibrations, which means the instrument is calibrated over the maximum frequency range. After a broadband calibration, you can change the frequency range or number of points without recalibrating the instrument. The calibration is interpolated, and accuracy is maintained.

User calibration kit support

FieldFox supports many Keysight standard calibration kits. In addition to *CalReady* and *QuickCal*, FieldFox also provides a comprehensive calibration utility. To obtain the most accurate measurement, users need to use cal kits that match their device connector types. FieldFox allows users to define their own mechanical calibration kits.

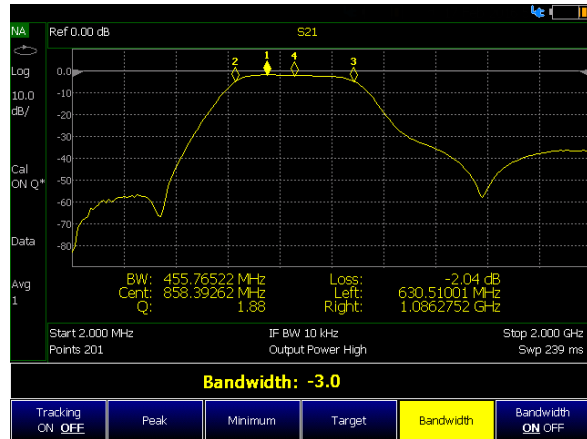

The marker bandwidth/Q factor function simplifies filter testing and tuning.

Electrical delay and port extension

For in-fixture measurements, use FieldFox's port extension or electrical delay capability to easily extend the reference plane to the device interface for accurate measurements. You can use the electrical delay capability to measure *deviation from linear phase* by removing the linear portion of the phase delay.

Power meter


FieldFox can connect with the Keysight USB power sensors to make average power measurements up to 40 GHz. Using USB peak power sensors, users can measure both the average and the peak power of a modulated signal.



Power meter display

Pulse measurements


FieldFox's pulse measurement option allows users to efficiently characterize pulsed-RF signals such as those used in radar and electronic warfare systems, leveraging Keysight's USB peak power sensors (available in 18 and 40 GHz models). Measurements include peak power, peak to average ratio, and pulse profiling.

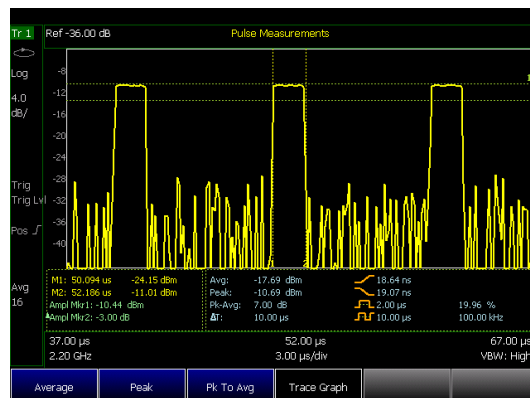

Pulse measurement display

Time domain

With the time domain option, FieldFox computes the inverse Fourier transform of the frequency-domain data to display reflection or transmission coefficients versus time. Time domain gating can be used to remove unwanted responses such as connector mismatch or cable discontinuities, and the results can be displayed in either time or frequency domain. FieldFox's time domain function supports both low pass mode and band pass mode, enabling users to measure both broadband and frequency-selective devices.

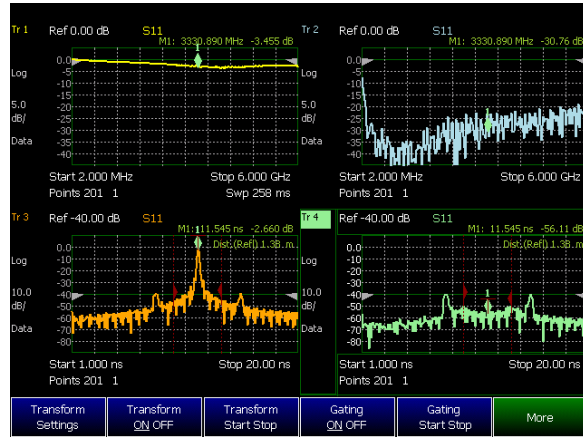


Use time domain gating to remove unwanted responses. Before gating: Traces 1 and 3, After gating: Traces 2 and 4.

Vector voltmeter

Using FieldFox's vector voltmeter (VVM), the phase shift and electrical length of a device can be measured. By utilizing the "zero" function, the phase and electrical length of one device can be measured relative to a "golden device". You can view results on the large display.

The VVM option also provides ratio measurements of two receivers or two channels, A/B or B/A. An external signal source is required for this measurement. You can use this capability to verify the magnitude and phase differences between multiple signal paths.

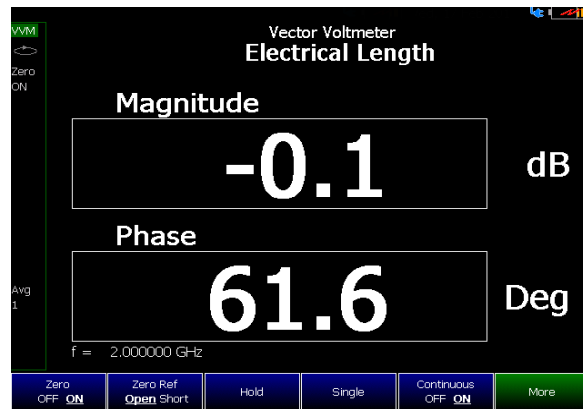

VVM applications:

- Cable trimming of phase matched cables
- Verifying the isolation of 2-port components


75 ohm device test

Most of the components used in cable TV systems are 75 ohm, like cables, filters, splitters and switches.

You can use the FieldFox RF VNA to measure 75-ohm devices easily. *QuickCal*, combined with a 50/75 ohm adapter (eg. Keysight part: N9910X-846) at each port and a 75 ohm load, turns the instrument into a 75 ohm tester. Alternatively you can use any of Keysight's 75 ohm calibration kits, along with a pair of 50/75 ohm adapters.

Mixed- mode S-parameters

Using FieldFox's mixed-mode S-parameters, common and differential-mode reflections of a device can be measured. Mixed-mode S-parameters are also known as balanced measurements. This measurement requires the full 2-port VNA and 2-port cal functionality.

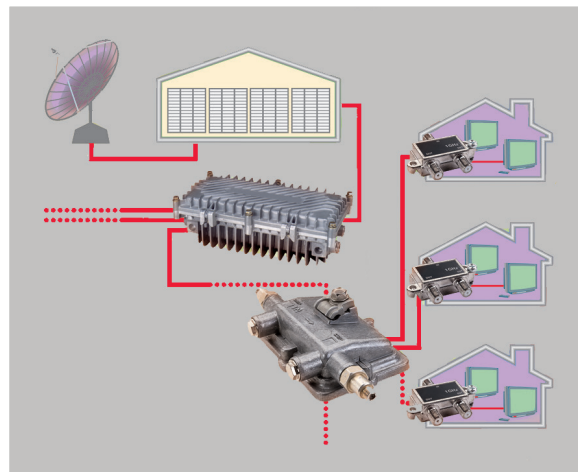


Cable TV distribution system, cable TV is a 75 ohm system

Feature and Benefit Summary


| Comprehensive measurement capabilities | |
|--|--|
| Vector network analysis | Provides accurate network analysis of RF components and enables you to measure and display all four S-parameters simultaneously, with a single connection. This means you can quickly and accurately characterize the device under test, using a handheld instrument. |
| Cable and antenna test <ul style="list-style-type: none"> - Return loss, SWR - Distance-to-fault | <p>Return loss/SWR measurements allow you to evaluate the impedance matching performance of a feed line across the frequency range of interest.</p> <p>Distance-to-fault measurements help you identify faults along a feed line. You can use these measurements to precisely pinpoint the location of damaged or degraded antennas, connectors, amplifiers, filters, duplexers, or other components.</p> <p>FieldFox provides up to a 1001 data-point resolution to help accurately locate faults and extend measurement distance.</p> |
| Transmission test <ul style="list-style-type: none"> - Cable loss - Insertion loss - Amplifier gain | Transmission tests are used to accurately measure cable loss, insertion loss (filters) and amplifier gain (tower mounted amplifier). FieldFox offers 2-port transmission magnitude and phase measurements with a typical dynamic range of 100 dB. |
| One-port cable loss | For already-installed cables, FieldFox accurately measures one-port cable loss. The instrument measures the actual cable loss, without the need for additional computations. |
| CalReady at test port | Each instrument is calibrated at the test ports. When you power up the instrument, it is ready to make measurements such as S11, S22, one-port cable loss, VSWR, return loss and DTF at the test port. |
| QuickCal | <p>The industry's first and only built-in calibration system allows you to calibrate the network analyzer without carrying a calibration kit into the field. QuickCal eliminates the hassle of carrying and using a cal kit, plus provides worry-free accuracy and excellent reliability.</p> <p>QuickCal allows operators to easily correct for drift errors caused by temperature changes during instrument operation. Full 2-port QuickCal is based on Keysight's Unknown Thru calibration methodology. It is an accurate way to measure non insertable devices, such as female-female duplexers.</p> |
| Mechanical calibration | Open-short-load (OSL) calibration is standard in FieldFox. Common calibration kit constants are preloaded in the instrument. Additional kits can be added by users. |
| Time domain | Using the time domain feature, you can display reflection or transmission coefficients versus time. Time domain gating can be used to remove unwanted responses such as connector mismatch or cable discontinuities. |



Perform and view return loss and distance-to-fault measurements at the same time

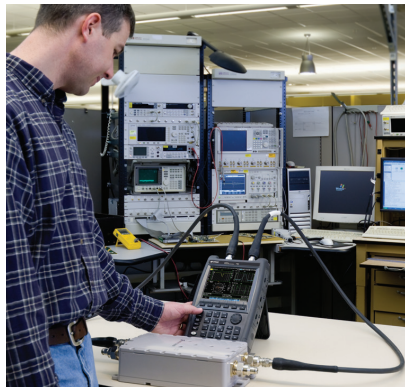


Tower mounted amplifier (TMA) measurement

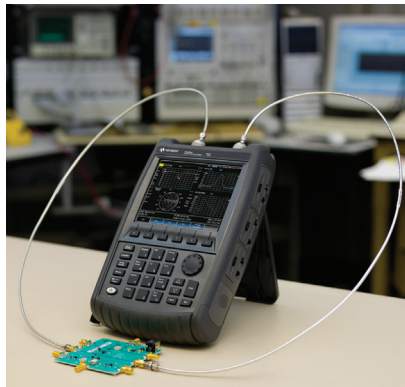

Filter and amplifier measurement

Feature and Benefit Summary (continued)

| Comprehensive measurement capabilities (continued) | |
|--|--|
| Interference rejection | The FieldFox RF VNA interference rejection mode is able to make reliable return loss and distance-to-fault measurements of cable and antenna systems under high interference signal environments. It can make valid measurements for interference signals coupled into the system up to +16 dBm. |
| Power meter | Makes accurate true average power measurements without the need for a power meter. The state-of-the-art Keysight USB power sensors provide measurements up to 24 GHz. |
| Smith chart | Smith charts can be used to display impedance matching characteristics in cable and antenna systems. |
| Vector voltmeter | The large vector voltmeter display makes it easy to match two or more device's electric length and ensure signals that travel on different devices have the same delay. |
| Electrical delay | Using the electrical delay function, you can remove the linear portion of the phase shift and view the deviation from linear phase. |
| Port extension | Allows you to extend the reference plane after calibration. This feature is useful for measurements such as in-fixture test, where calibrating at the DUT or reference plane is cumbersome. |
| GPS | Enables operators to find exact locations, and time/location stamp their measurement reports. The GPS information can be displayed on the screen, and saved as part of the image or data file, for reporting purposes. |
| Data management | |
| Limit lines | Automated pass/fail testing eliminates the guesswork from your test processes and helps ensure that your components are aligned and tested to the same specifications at all test stations. Pass/fail testing is easily accomplished with user-defined limit lines, which let you quickly and consistently compare measured data to test limits. The pass/fail results are displayed clearly on the instrument screen to minimize operator errors or misinterpretation. |
| Save/recall states | Save time and reduce operator errors with recall states. You can quickly switch between different manufacturing tests simply by recalling the appropriate instrument state. Saving and recalling states also eliminates operator errors that occur during repeated entry of instrument parameters. Each recall state contains all instrument parameters such as start and stop frequencies, power level, number of trace points, IF bandwidth, calibration data, markers, limit lines, and more. |
| Powerful marker functions | Speed up component test times by using the power of built-in data markers. Use the six markers per trace to display data in absolute or relative terms. |

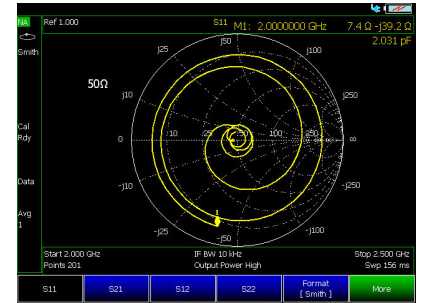

Smith chart display



Easy-to-use save/recall functions



Duplexer measurement

Feature and Benefit Summary (continued)

| Field-proof usability | |
|---|---|
| Transflective display and backlit keys | The display is designed for easy viewing in indoor and outdoor settings and in direct sunlight and darkness. Access different display modes via softkeys. |
| Functional key access | Front-panel keys make it easy to perform tasks and make measurements. |
| One-button measurement | Provides task-driven user interface to simplify the measurements. |
| Rugged design | |
| Water-resistant chassis, keypad and case design | The case is made from polycarbonates that withstand wide temperature ranges and salty, humid environments. |
| RF connector protection | A specially designed connector bay protects the RF connectors from damage during drops or other external impacts. |
| Dust-free design | With no vents or fans in the case, FieldFox resists dust for better equipment reliability. |
| Meets tough environmental standard | Industry's only handheld network analyzer with MIL Class 2 compliance with no exceptions. |
| Gasketed ports | Protects instrument from moisture. |
| Modern connectivity | |
| USB 2.0 ports | Two USB 2.0 ports can be used to transfer files. |
| LAN port | Used for data transfer, SCPI programming, Data Link connection, GPS receiver, and remote control via iOS device. |
| SCPI support ¹ | SCPI over LAN and mini USB allows users to automate tests or control a FieldFox from a remote location. |
| Micro SD flash card slot | Use as a data storage device. |
| FieldFox Data Link software | Transfer data from the instrument to a PC for back-office applications such as baseline analysis and report generation. |
| Remote control capability | Remotely monitor and control FieldFox using an iOS device such as iPad or iPhone, via a LAN network connection. |

1. SCPI over USB is only available for N9923A with serial number prefix starting with MY5607/SG5607/US5607 and N9923A upgraded with Option N9910HU-500.



Make accurate true average power measurements without bringing along a power meter



Transflective display makes it easy to read measurements in direct sunlight



Water resistant chassis withstands wide temperature ranges and humid environments

Specifications

A condensed version of the specifications is provided here. See the User's Guide for the complete version; <http://literature.cdn.keysight.com/litweb/pdf/N9923-90001.pdf>

Specification (spec.):

Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. The following conditions must be met:

- FieldFox has been turned on at least 10 minutes unless otherwise specified
- FieldFox is within its calibration cycle
- Storage or operation at 25 °C ±5 °C range (unless otherwise stated)

Typical (typ.):

Expected performance of an average unit over a 20 °C to 30 °C temperature range, unless otherwise indicated; does not include guardbands. The FieldFox RF VNA must be within its calibration cycle.

Nominal (nom.):

A general, descriptive term or design parameter.

Specifications (continued)

Network analysis

| Measurements | |
|--|---|
| S11, S21 | Magnitude and phase |
| S12, S22 | Magnitude and phase (Option 122) |
| Display | Log, linear, phase, group delay, VSWR, Smith chart, polar chart, split screen to show different S-parameters and phases |
| System impedance selection | 50 ohm and 75 ohm (with 50/75 ohm adapter) |
| Frequency | |
| Frequency range | Option 104: 2 MHz to 4 GHz Option 106: 2 MHz to 6 GHz |
| Frequency reference | Accuracy: ± 2 ppm Aging rate: ± 1 ppm Temperature stability: ± 1 ppm over -10 to 55 °C |
| Frequency resolution | 1 Hz |
| Measurement speed (Sweep time) ¹ S11 and S21, 2 MHz to 6 GHz 30 kHz IFBW, 1001 points | 0.365 ms/point |
| Data points | 101, 201, 401, 601, 801, 1001, 1601, 4001, 10,001 (custom number of points can be set using SCPI) |
| Directivity | Corrected: 42 dB |
| System dynamic range (S21) | 2 MHz to 6 GHz: 100 dB (typical) |
| IF bandwidth | 300 Hz, 1 kHz, 3 kHz, 10 kHz, and 30 kHz |
| Output power range | High power: +5 dBm (nominal) Low power: -40 dBm (nominal) |
| Trace noise (high output power, IF band) | Magnitude: < 0.01 dB rms width = 300 Hz) |
| Immunity to interference | +16 dBm (nominal) |
| Maximum input level port 1 or port 2 | +23 dBm / ± 50 VDC |

1. 0.695 ms/point; applicable for N9923A with serial number prefix < than MY5607/SG5607/US5607 and N9923A not upgraded with Option N9910HU-500.

Specifications (continued)

Cable and antenna analyzer (Option 305)

| Capabilities | |
|--|---|
| Return loss | |
| VSWR | |
| Distance-to-fault (DTF) | <ul style="list-style-type: none"> – Range = $(n - 1)/(\text{span} * 2) \times V_f$ (velocity factor in cable) x C (light speed) – Resolution = range/number of points – Number of points: 101, 201, 401, 601, 801, 1001 – Distance-to-fault display: Return loss, VSWR , reflection coefficient |
| Cable loss (1-port) | Terminated cable under test with short |
| Transmission measurement (insertion loss and gain) | |
| Calibration types | CalReady One port mechanical calibration Full 2-port mechanical calibration Enhanced response calibration QuickCal (1-port and 2-port) Automatic cal update with frequency change |

Vector network analyzer time domain (Option 010)

Using time domain, data from transmission or reflection measurements in the frequency domain are converted to the time domain. The time-domain response shows the measured parameter value versus time.

| Time stimulus modes | |
|---------------------|---|
| Low-pass step | This stimulus, similar to a traditional time domain reflectometer (TDR) stimulus waveform, is used to measure low-pass devices. The frequency-domain data should extend from DC (extrapolated value) to a higher value. |
| Low-pass impulse | This stimulus is also used to measure low-pass devices. |
| Bandpass impulse | The bandpass impulse stimulates a pulsed RF signal and is used to measure the time-domain response of band-limited devices. |
| Windows | |
| | The windowing function can be used to filter the frequency-domain data and thereby reduce overshoot and ringing in the time-domain response. |
| Gating | |
| | The gating function can be used to selectively remove reflection or transmission time-domain responses. In converting back to the frequency domain the effects of the responses outside the gate are removed. |

Specifications (continued)

Power meter measurement (Option 302)

Support for Keysight USB average and peak power sensors. Frequency and power range dependent on sensor. List of supported sensors: <http://www.keysight.com/find/usbsensorsforfieldfox>

Pulse measurements with USB peak power sensor (Option 330)

FieldFox's pulse measurement option can be used to characterize RF pulses such as those used in radar and electronic warfare systems. Measurements are made using FieldFox and Keysight's USB peak power sensors.

Performance specifications such as frequency, dynamic range and minimum pulse width depend on the peak power sensor. Supported peak power sensors: <http://www.keysight.com/find/usbsensorsforfieldfox>.

Remote control capability with iPad or iPhone (Option 030)

Users can now remotely monitor and control their FieldFox using their iOS device such as an iPad, iPhone, or iPod Touch. FieldFox's Remote Viewer iOS app emulates the front panel of the unit, so users can simply press any FieldFox key right from their iOS device, including the hardkeys or softkeys.

With this technology, FieldFox can now be placed in areas where users do not wish to stay long due to extremely harsh or unsafe conditions. Additionally, if one technician or engineer has trouble making a measurement or determining the source of a problem, another can step in to remotely troubleshoot and solve the problem, which helps minimize rework and multiple trips.

When the application is launched, users can access the FieldFox demo videos and technical literature such as user guides, application notes, and datasheets. Accessing this information via the FieldFox app helps engineers and technicians in the field quickly find the data they need to resolve issues as they arise. Such capabilities also make the app ideal for training and educational purposes.

The iOS device and FieldFox communicate via a WLAN or broadband data connection. Without Option 030, users can remotely view the live display screen of their FieldFox, but *cannot control* the instrument.

Specifications (continued)

| General specifications | |
|------------------------------------|---|
| Connector type (port 1 and port 2) | Type N female |
| Test port impedance | 50 ohm |
| External reference | Input type: BNC female Reference frequency: 10 MHz Required level: -5 dBm to 10 dBm |
| External trigger input | Impedance: 10 k Ω Level range: Rise edge: 17V; falling edge: 1V |
| Display | 6.5" transfective, color VGA LED backlit 640 x 480 with anti-glare coating |
| Speaker | Built-in speaker |
| Headphone jack | Built-in headphone jack |
| Connectivity | 2 x USB 2.0; 1 x mini USB; 1 x LAN |
| GPS | Latitude, longitude, elevation, and accurate time are provided. The GPS information can be displayed on the screen and saved as part of the image or data file. The GPS capability is standard with all N9912A FieldFox RF analyzers. An external USB GPS receiver is required. Keysight recommends the Microsoft Streets & Trips, or Microsoft AutoRoute with GPS locator. |
| Internal storage | Minimum 4 GB, up to 1000 traces |
| External storage | 1 x micro SD slot and 2 x USB 2.0 |
| EMC | Complies with European EMC Directive 2004/108/EC <ul style="list-style-type: none"> - IEC/EN 61326-1 - CISPR Pub 11 Group 1, Class A - AS/NZS CISPR 11 - ICES/NMB-001 |
| ESD | - IEC/EN 61000-4-2, functional up to 20 kV test |
| Safety | Complies with European Low Voltage Directive 2006/95/EC <ul style="list-style-type: none"> - IEC/EN 61010-1 2nd Edition - Canada: CSA C22.2 No. 61010-1-04 - USA: UL 61010-1 2nd Edition |
| Environmental | Compliant with MIL-PRE-28800F Class 2 general requirements - no exceptions |
| Temperature | Operating: -10 °C to 55 °C Non operating: -51 °C to 71 °C |
| Weight | 6 lbs / 2.7 kg including battery |
| Dimensions (H x W x D) | 292 x 188 x 72 mm (11.5" x 7.4" x 2.8") |
| Power | Power supply: External DC input: 15 to 19 VDC |
| External AC power adapter | Input: 100 to 250 VAC, 50 to 60 Hz; 1.25 to 0.56 A Output: 15 VDC, 4 A Power consumption: 14 W (typical) Battery: 6 cell Lithium Ion, 10.8 V, 4.6 A-h Battery operating time: 3.5 hours |
| Language | English, Chinese, French, Spanish, Japanese, Russian, German, Italian, and Turkish |

Configuration Information

N9923A FieldFox RF vector network analyzer options

| | |
|----------------------|---|
| Option 104 | 4 GHz RF vector network analyzer, transmission/reflection |
| Option 106 | 6 GHz RF vector network analyzer, transmission/reflection |
| Option 010 | Cable and antenna analyzer QuickCal |
| Option 030 | Remote control capability from iOS device |
| Option 112 | USB power sensor measurements versus frequency |
| Option 122 | Full 2-port S-parameters |
| Option 208 | Time domain |
| Option 212 | Mixed-mode S-parameters |
| Option 302 | External USB power sensor support |
| Option 305 | Cable and antenna analyzer |
| Option 308 | Vector voltmeter |
| Option 330 | Pulse measurements with USB peak power sensor |
| Standard accessories | AC/DC adapter; battery; soft carrying case; LAN cable, Quick Reference Guide, and full manual |

For more information go to: www.keysight.com/find/fieldfox

N9923A Upgrades

The following upgrades are available for the N9923A FieldFox RF handheld vector network analyzer. More information regarding upgrades is available at: www.keysight.com/find/fieldfoxsupport

| Product number | Description | Additional requirements |
|----------------|--|--------------------------------|
| N9923AU-010 | Time domain analysis | None |
| N9923AU-030 | Remove control capability | None |
| N9923AU-112 | QuickCal | Option 212 for 2-port QuickCal |
| N9923AU-122 | Full 2-port S-parameters | None |
| N9923AU-208 | USB power sensor measurements versus frequency | Option 302 |
| N9923AU-212 | Mixed-mode S-parameters | Option 122 |
| N9923AU-302 | External USB power sensor support | None |
| N9923AU-305 | Cable and antenna analyzer | None |
| N9923AU-308 | Vector voltmeter | None |
| N9923AU-330 | Pulse measurements | None |

N9923A Hardware Upgrade

| Option ^{1,2} | Description | Upgrade contents | Additional requirements |
|-----------------------|---------------------------------|---|-------------------------------|
| N9910HU-500 | N9912A/N9923A processor upgrade | Improved performance for N9912A and N9923A models | Return to service center only |

1. Upgrades are not available for N9923A analyzer with serial number prefix starting with MY5607/SG5607/US5607, as this analyzer already has the improved hardware.
2. Please contact your local Keysight Service Center for instructions on how and where to send the instrument, and how to order the factory upgrades.


Configuration Information (continued)

N9910X RF/MW handheld analyzer accessories

| | |
|------------|--|
| N9910X-800 | T-calibration kit, DC-6 GHz, Type-N (m) |
| N9910X-801 | T-calibration kit, DC-6 GHz, Type-N (f) |
| N9910X-802 | T-calibration kit, DC-6 GHz, 7/16 DIN (m) |
| N9910X-803 | T-calibration kit, DC-6 GHz, 7/16 DIN (f) |
| 85514A | 4-in-1 OSLT mechanical calibration kit, DC to 9 GHz, Type-N (m), 50 ohm |
| 85515A | 4-in-1 OSLT mechanical calibration kit, DC to 9 GHz, Type-N (f), 50 ohm |
| N9910X-810 | Rugged phase-stable cable, Type-N (m) to Type-N (m), 5 ft |
| N9910X-811 | Rugged phase-stable cable, Type-N (m) to Type-N (f), 5 ft |
| N9910X-812 | Rugged phase-stable cable, Type-N (m) to Type-N (m), 12 ft |
| N9910X-813 | Rugged phase-stable cable, Type-N (m) to Type-N (f), 12 ft |
| N9910X-814 | Rugged phase-stable cable, Type-N (m) to 7/16 (m), 60 inch or 1.5 m |
| N9910X-815 | Rugged phase-stable cable, Type - N (m) to 7/16 (m), 12 ft or 3.6 m |
| N9910X-816 | Rugged phase-stable cable, Type-N (m) to Type-N (f), 3.28 ft or 1 m |
| N9910X-817 | Rugged phase-stable cable, Type-N (m) to Type-N (m), 3.28 ft or 1 m |
| N9910X-843 | Coaxial adapter, Type-N (m) to 7/16 DIN (f) |
| N9910X-845 | Adapter kit: Type-N (f) to 7/16 DIN (f), Type-N (f) to 7/16 DIN (m), Type-N (f) to Type-N (f) |
| N9910X-846 | Coaxial adapter, Type-N (m) 50 ohm to Type-N (f) 75 ohm (recommend quantity 2 for 75 ohm measurements) |
| N9910X-860 | Fixed attenuator, 40 dB, 100 W, DC-3 GHz, Type-N (m) to Type-N (f) |
| N9910X-861 | Fixed attenuator, 40 dB, 50 W, DC-8.5 GHz, Type-N (m) to Type-N (f) |
| N9910X-870 | Extra battery |
| N9910X-872 | External battery charger |
| N9910X-873 | AD/DC adapter |
| N9910X-874 | External bias-tee, 2.5 MHz to 6 GHz, 1 W, 0.5 A |
| N9910X-880 | Extra soft carrying case with backpack and shoulder strap |
| N9910X-875 | DC car charger and adapter |
| N9910X-881 | Hard transit case |

For more information go to: www.keysight.com/find/fieldfox


Accessories

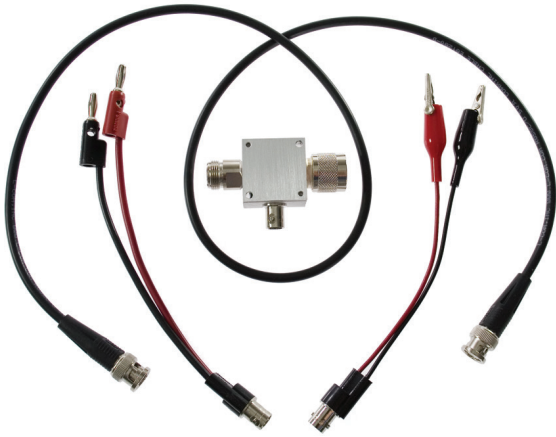

Bias-tee, N9910X-874



Phase stable cable, N9910X-810



100 Watt attenuator, N9910X-860



Adapter kit, N9910X-845



85514A




85515A



N9910X-800



N9910X-801



N9910X-802



N9910X-803

T-Cal kits

Accessories (continued)



Soft carrying case with backpack and shoulder straps included with a standard N9912A. For an extra soft carrying case order N9910X-880



Hard transit case, N9910X-881

FieldFox fits inside hard transit case




AC/DC adapter, N9910X-873



External battery charger, N9910X-872

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.
 From Hewlett-Packard to Agilent to Keysight.

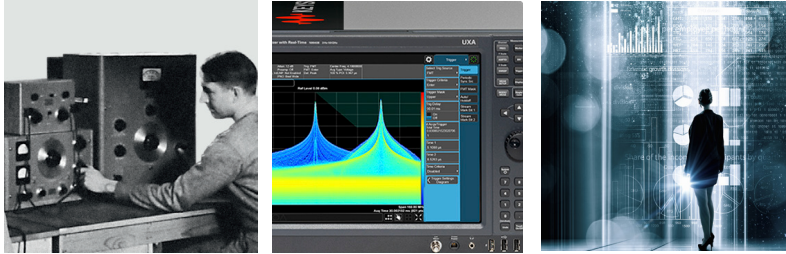

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

*Accelerate Technology Adoption.
Lower costs.*

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/fieldfox

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 11 2626 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-9-7-17)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System