



UK to Europe USB travel adaptor



# TRAVEL

## POWER

charge and power your portable devices wherever you go with our worldwide travel range

### FEATURES

- Convert UK plugs for use with European sockets
- Two USB ports (2.1A shared) for charging portable devices
- Ideal for use when travelling in Europe




### PRODUCT IMAGES



TAUSBEUR2

### LINE DRAWING

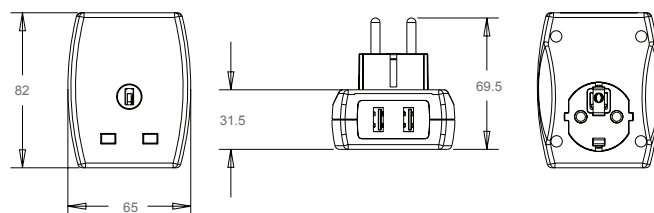

### PRODUCT INFORMATION

Part Number	TAUSBEUR2
Product Dimensions	Height 82mm x Width 65mm x Depth 69.5mm
Sockets	1

### TECHNICAL SPECIFICATIONS

Standard(s)	This product is certified to applicable British safety standards BS8546 and IEC60884
Maximum Load (Wattage)	13A: 2900 Watts, 250 Volts
IF IN DOUBT CONSULT A QUALIFIED ELECTRICIAN	



### COUNTRIES OF USE

Converts UK 3-pole plugs to fit the European 3-pole system, with 2 USB charging outlets. Countries of use: Austria, Belgium, Chile, Czech Republic, Denmark, Finland, France, Germany, Greece, Greenland, Hungary, Iceland, India, Ireland, Israel, Italy, Luxembourg, Madeira, Majorca, Monaco, Morocco, Netherlands, Norway, Poland, Portugal, Romania, Slovak Republic, Spain, Sweden, Tunisia, Turkey and other parts of the world operating on European E and F type systems. Suitable for use with 3-pole (earth/grounded class 1) plugs. Suitable for use with E and F type sockets. DOES NOT provide earth connections in parts of Italy.

**Note:** \* Older electrical systems may still be in use in these countries.

**This adaptor is generally not suitable for use in Switzerland.**

### DUAL USB POWER OUTPUT

This product is fitted with two type A USB outlets that allow you to simultaneously charge and use two devices. Ideal for charging portable devices. Two type A USB ports - 5V 2100mA output. (Shared across both ports).

### SAFETY WARNING

- ✓ **DO** Ensure that the appliance is suitable for the local power supply. The majority of European countries have a 220-250 Volt supply. Check before use.
- ✓ **DO** Check whether your appliance is suitable for dual voltage, most travel appliances are designed to run on dual voltages. This adaptor DOES NOT change voltages.
- ✓ **DO** Insert the adaptor into the wall socket and use the appliance in the normal way.
- ✗ **DON'T** Use if the local socket fitting does not allow insertion of the adaptor. This may be the case in some countries.
- ✗ **DON'T** Exceed maximum allowable load 13 Amps, 250 Volts a.c., 2,900 Watts.
- ✗ **DON'T** Use in damp or wet conditions.

Masterplug Help Line

**03300 249 279**

Supplied by

**Luceco PLC**

Stafford Park 1 Telford TF3 3BD ENGLAND

Visit our website at

**[www.masterplug.com](http://www.masterplug.com)**