




Technical Data

Junction Boxes - Connection Cover

Brief product description:

A first class range of essential wiring accessories required for any installation.

Product Images

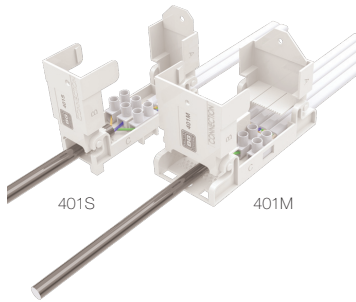

Features:

- For use with terminal strips up to 30 amp
- 3 part, easy assemble connection cover
- Auto cable restraint - 75% quicker to install than similar products
- White colour for ease of location in areas of low light
- Made in the UK from reclaimed materials
- Conforms to all relevant local and national regulations
- V2 fire rating
- Supplied in a counter display carton
- terminal strips not included

Packaging Information

Cat No.	Description	Packaging Type			Pack Quantity			Barcode		
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Individual	Inner Box	Outer Box
401M	Maser for 4W				1	20	200	/		
401S	Slave for 3W				1	28	280	/		

Weights & Dimensions

Cat No.	Description	Dimension (W x L x H) cm			Weight (g)			CMB (m ³)
		Product	Inner Box	Outer Box	Each	Inner Box	Outer Box	Outer Box
401M	Maser for 4W							
401S	Slave for 3W							

Junction Boxes - Connection Cover

Installation Information

Safety Warning

Before use please read carefully and use in accordance with these safety wiring instructions.

Before commencing any electrical work ensure the supply **is switched off at the mains**. Either by switching off the consumer unit or by removing the appropriate fuse.

Wiring should be in accordance with the latest edition of the IEE regulations (BS 7671).

Wire Identification – Twin & Earth Cable

EARTH = Green/Yellow Sleeving

NEUTRAL = Black (pre Apr 04) / Blue (after Apr 04)

LIVE = Red (pre Apr 04) / Brown (after Apr 04)



Technical Helpline: 0845 194 7584

If in doubt consult a competent electrician.

The ends of the individual conductors should have the insulation removed by approx. 10mm. Any bare earth conductors should be sleeved to within 10mm of the ends.

(These details are for general information only and conductor lengths may need to be trimmed in certain installations).

For lighting circuits, use sleeving of the appropriate 'live' colour to ensure clear identification of live connections. See diagram for typical lighting circuit wiring using 4-way junction box.

To prevent fire hazard always use cable of the correct rating and type.

Junction Box – General Advice

The terminals of Junction Boxes can be used for any polarity.

Remove the central screw and remove cover to expose terminals. In multi-terminal junction boxes, take care to use only one polarity in any one group of terminals.


Position the way the cable lies, so as to pass through one of the apertures in the side of the base.

For Selective Entry boxes selecting the apertures to be used by rotating the guide marked on the lid.


When cable installations are complete, position the cover so as to block off the cable entry apertures not used in the base and tighten the screw.

Alternatively for non-selective junction boxes the required apertures can be easily broken away using pair of pliers and with minimal force. Clean edges to remove any sharp edges.


Easy to Install




Step 1
Remove lids




Step 2
Place electrical
connection on to base



Step 3
Insert lids



Step 4
Close lid A & hold in
position whilst closing lid B



Step 5
Clip the lid shut.
Use optional screw if required