



## INSTRUCTION SHEET

### Cat. NO. 366BF BLADE REPLACEMENT FOR THE 366RF CABLE CUTTER

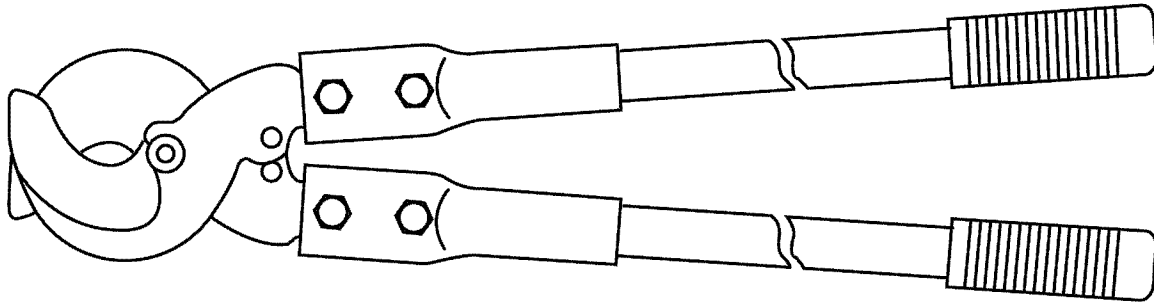

#### INSTRUCTIONS TO REPLACE BLADE ASSEMBLY

1. Hold the 3/8" bolt using a 9/16" wrench.
2. Remove the hex nut with a 9/16" wrench.
3. Repeat for remaining bolts and nuts.
4. Remove the old blade assembly and replace with the 366BF blade assembly. Align the holes of the blade shank with the holes in the handle.
5. Replace the bolts and nuts.
6. Hold the bolts with 9/16" wrench and tighten the nuts with a 9/16" wrench.
7. Continue to tighten each nut, collapsing the walls of the handles, until there is no longer any looseness between the handles and the blade assembly.

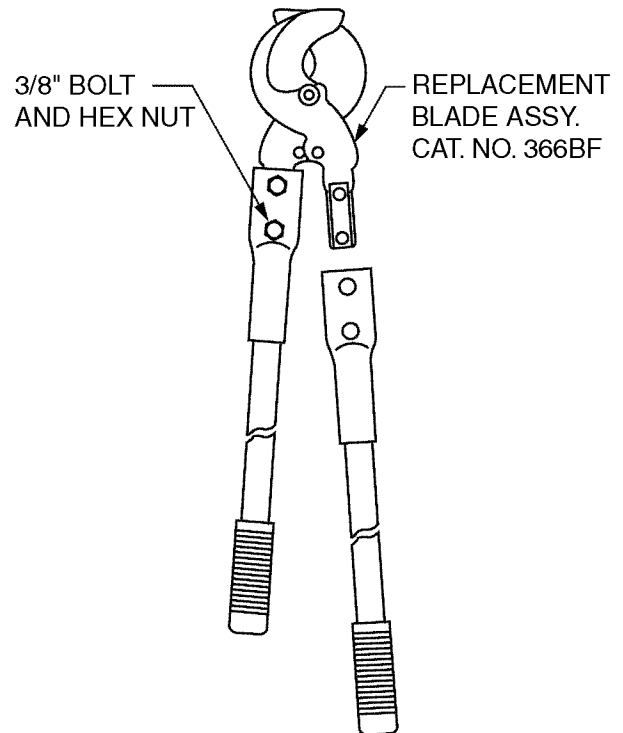

For parts or service, contact the tool service center at 1-800-284-TOOL (8665).

**WARRANTY:** Thomas & Betts sells this product with the understanding that the user will perform all necessary tests to determine the suitability of this product for its intended use. Thomas & Betts manufactures its goods and tools in a manner to be free of defects. Should any defect occur in its goods within two (2) years (or tools within time stated on warranty card) of date of purchase, Thomas & Betts, upon prompt notification, will at its option, exchange or repair the goods or tools or refund the purchase price. Proof of purchase required.

**Limitations and Exclusions:** THIS WARRANTY IS IN LIEU OF ALL OTHER REPRESENTATIONS AND EXPRESSED AND IMPLIED WARRANTIES (INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR USE), AND UNDER NO CIRCUMSTANCES SHALL THOMAS & BETTS BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES OF ANY KIND.

Thomas & Betts Corporation  
Memphis, Tennessee  
Website: [www.tnb.com](http://www.tnb.com)