

Compression Connectors for Copper Conductor




Ideal for confined-space terminations.

Narrow-Tongue Lugs — One- and Two-Hole, Standard Barrel, 600V Applications

Material: High-Conductivity Wrought Copper

Finish: Electro Tin Plate

NEW!

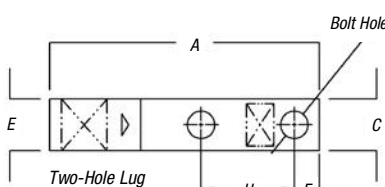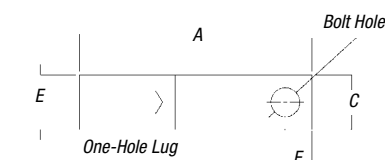

CAT. NO. 5 4 2 1 2 1 N T *

___ = To Order 45° and 90° Angle Lugs
UF = 45°
UB = 90°

Other options include silver plating (add SP to catalog number), blind end (add BE to catalog number) and peep holes (add PH to catalog number).

Catalog No. Example:

54108NTUB is a 90° angled one-hole narrow-tongue lug for #1 AWG.

* Special lugs may have other catalog number constructions. Please contact Technical Services.

CAT. NO.	WIRE SIZE			DIMENSIONS (IN.)								DIE CODE	DIE COLOR
	CODE	FLEX CLASS G, H, I, K, M†	BOLT SIZE										
				A	B	C	D	E	F	H			
One-Hole Narrow-Tongue Lugs													
54138NT	#4 AWG	91/24	#10	1.31	.56	.37	.10	.37	.25	—	29	GRAY	
54107NT	#2–3 AWG	125/24	¼	1.50	.65	.41	.07	.41	.25	—	33	BROWN	
54108NT	#1 AWG	150,175/24	¼	1.50	.65	.47	.11	.47	.25	—	37	GREEN	
54152NT	1/0 AWG	225/24	¼	1.60	.65	.52	.13	.52	.25	—	42	PINK	
54157NT	2/0 AWG	275/24	¼	1.60	.65	.57	.13	.57	.25	—	45	BLACK	
54162NT	3/0 AWG	325/24	¼	1.68	.65	.63	.13	.63	.25	—	50	ORANGE	
54167NT	4/0 AWG	450/24	¼	1.90	.65	.70	.14	.70	.25	—	54	PURPLE	
54172NT	250 kcmil	—	¼	2.00	.65	.77	.14	.77	.25	—	62	YELLOW	
54178NT04	300 kcmil	—	¼	2.33	.88	.85	.15	.85	.25	—	66	WHITE	
54115NT	350 kcmil	—	½	2.75	1.25	.93	.18	.93	.50	—	71	RED	
54115NT06	350 kcmil	—	¾	2.50	1.00	.93	.18	.93	.38	—	71		
54118NT	500 kcmil	—	½	3.25	1.25	1.10	.22	1.10	.50	—	87	BROWN	
54123NT08	750 kcmil	—	½	3.48	1.25	1.33	.27	1.33	.50	—	106	BLACK	
54123NT	750 kcmil	—	¾	3.80	1.58	1.33	.27	1.33	.63	—	106		
Two-Hole Narrow-Tongue Lugs													
54206NT0310	#4 AWG	91/24	#10	1.88	1.13	.37	.10	.37	.25	.63	29	GRAY	
54207NT	#2-3 AWG	125/24	¼	2.04	1.19	.41	.11	.41	.25	.63	33	BROWN	
54207NT0412	#2-3 AWG	125/24	¼	2.16	1.31	.41	.11	.41	.25	.75	33		
54207NT0416	#2-3 AWG	125/24	¼	2.41	1.56	.41	.11	.41	.25	1.00	33	GREEN	
54208NT	#1 AWG	150,175/24	¼	2.04	1.19	.47	.11	.47	.25	.63	37		
54208NT0516	#1 AWG	150,175/24	⅝	2.63	1.78	.47	.11	.47	.38	1.00	37	PINK	
54255NT	1/0 AWG	225/24	⅝	2.61	1.66	.52	.14	.52	.38	.88	42		
54261NT	2/0 AWG	275/24	⅝	2.66	1.66	.57	.14	.57	.38	.88	45	BLACK	
54210NT	2/0 AWG	275/24	¾	2.82	1.82	.57	.14	.57	.38	1.00	45		
54266NT	3/0 AWG	325/24	⅝	2.88	1.78	.63	.13	.63	.38	1.00	50	ORANGE	
54211NT	3/0 AWG	325/24	¾	2.92	1.82	.63	.13	.63	.38	1.00	50		
54212NT	4/0 AWG	450/24	¾	3.07	1.82	.70	.14	.70	.38	1.00	54	PURPLE	
54213NT	250 kcmil	—	¾	3.17	1.82	.77	.14	.77	.38	1.00	62		
54275NT	250 kcmil	—	¾	4.16	2.81	.77	.14	.77	.50	1.75	62	YELLOW	
54282NT	350 kcmil	—	½	4.36	2.81	.93	.18	.93	.50	1.75	71H		
54218NT	500 kcmil	—	¾	4.57	2.57	1.10	.22	1.10	.38	1.75	87	BROWN	
54286NT	500 kcmil	—	½	4.81	2.81	1.10	.22	1.10	.50	1.75	87		
54878BENTPH	600 kcmil	—	½	5.83	3.00	1.20	.24	1.20	.50	1.75	94	GREEN	
54223NT0628	750 kcmil	—	¾	4.79	2.57	1.33	.27	1.33	.38	1.75	106H		
54223NT0616	750 kcmil	—	¾	5.00	2.02	1.66	.27	1.33	.38	1.00	106	BLACK	
54223NT	750 kcmil	—	½	5.04	2.81	1.33	.27	1.33	.50	1.75	106H		
58884BENTPH	—	1600/24	½	6.16	3.00	1.33	.24	1.20	.50	1.75	106H		
58825NT	900 kcmil	1925/24 = 777 kcmil	¾	5.00	2.13	1.66	.31	1.50	.50	1.00	115	YELLOW	
58825NT0828	900 kcmil	1925/24 = 777 kcmil	½	5.75	2.88	1.66	.31	1.50	.50	1.75	115		

† Contact Technical Services for specific stranding listings

Tooling: pp. F-80-F-100 Die Selector Chart: pp. F-101-F-104