


Channels at Full Scale
Available in 10 and 20 foot lengths

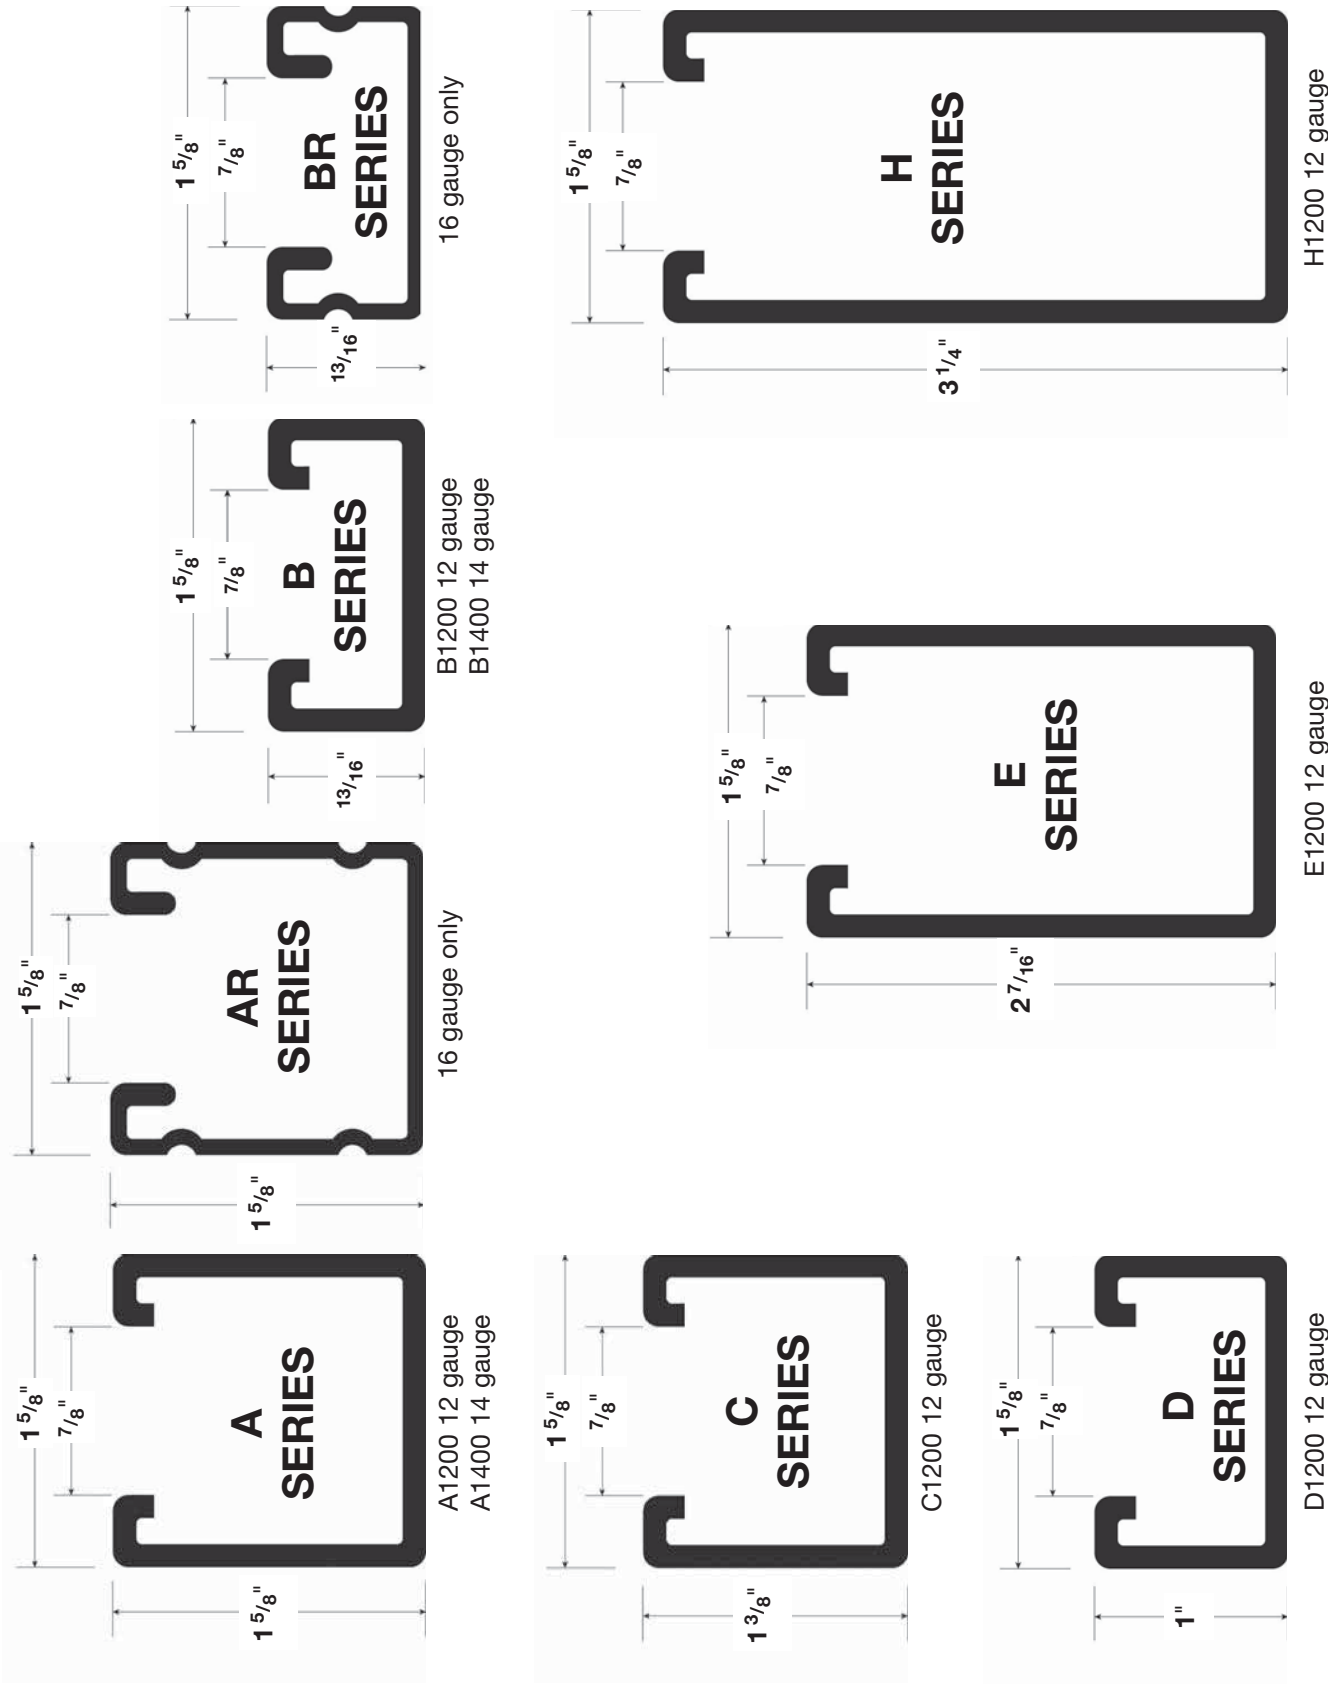

Channels and Concrete Inserts

SECTION 1

Channel Selection Chart

CHANNEL	HOLE CONFIGURATIONS					LENGTH	FINISH ON STEEL							MATÉRIAUX SPÉCIAUX			
	HS	S	SW	P	KO		ft	BC	PG(C)	EG(C)	GoldGalv®	HDG(C)	GR,GY,WH	PV(C)	AL(C)	T316L	SS6(C)
Series																	
A1200						10 or 20											
A1400						10 or 20											
A1600						10 or 20											
B1200						10 or 20											
B1400						10 or 20											
BR1600						10 or 20											
C1200						10 or 20											
D1200						10 or 20											
E1200						10 or 20											
H1200						10 or 20											

Legend

EXAMPLES	HOLE CONFIGURATION	FINISH ON STEEL	SPECIAL MATERIALS
A120010PG Plain channel, 10 ft., pre- galvanized finish	Suffix blank Plain, no holes HS Half slot S Slotted SW Slotted wide	Suffix BC Bare PGC Pre-galvanized EGC Electrogalvanized No Suffix GoldGalv®	Suffix AL Aluminum SS6 (C) Stainless Steel Type 316 T316L Stainless Steel Type 316L SS (C) Stainless Steel Type 304 *
B1400P10 Punched channel, 10 ft., GoldGalv® finish	P Punched KO Knockout	HDGC Hot dipped galvanized GR,GY,WH Epoxy paint in green (GR), grey (GY), or white (WH)	
E1200HS20HDG Half slot channel, 20 ft hot dipped galvanized			
	Standard offering.	A minimum order quantity may apply.	*Check with your Regional Sales Office

Hole Configuration

