ENERGY AND AUTOMATION

ROTARY CAM SWITCH 7GN SERIES, CHANGEOVER SWITCH WITHOUT 0, 1 POLE 25A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM

Product designation				Rotary cam
_		switches		
Product type designati General characteristics				7GN25
Switching diagram				54 - Changeover switch without 0 1 pole
N° of elements				1
Mounting form				O - Rear mounting with black handle
Contact characteristics	3			
Rated insulation voltag	e Ui			
		IEC/EN	V	690
		UL/CSA	V	600
Rated impulse withstar			kV	6
Conventional free air th	nermal current Ith			
		IEC/EN	Α	25
		UL/CSA	Α	30
Rated operational volta			V	480
Rated operational impu			kV	4
Maximum fuse size for	short-circuit protection In (gG)	401.4	•	0.5
		10kA	A	25 25
		15kA 25kA	A A	25 25
Rated short time curre	nt low	ZUKA		
Nated Short time curre	THE ICW	1s	Α	400
Conductivity		13		10/5 mA/V
Operational current le	IEC/EN			10/0 11/7 (
operational current to	AC1/AC21A			
	7.6 17.162 17.1		Α	25
	AC15			
		110V	Α	16
		220/230V	Α	12
		380/400V	Α	8
		660/690V	Α	2
Rated operational pow				
	Three-phase AC-3			
		220/230V	kW	5.5
		380/440V	kW	7.5
	0.000	500/690V	kW	7.5
	Single-phase AC-3	110\/	Iz\A/	1.5
		110V 220/230V	kW kW	3
		380/440V	kW	5.5
	Three-phase AC23A	000/1101	1000	
	711100 phace 7102071	220/230V	kW	6.5
		380/440V	kW	11
		500/690V	kW	11
	Single-phase AC23A			
		110V	kW	1.5
		220/230V	kW	3.7
		380/440V	kW	5.5



electric ROTARY CAM SWITCH 7GN SERIES, CHANGEOVER SWITCH WITHOUT 0, 1 POLE 25A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM **ENERGY AND AUTOMATION**

Rated operational co	urrent in DC			
	DC21A			
		48V	Α	25
		60V	Α	25
		110V	Α	4
		220V	A	0.7
	DC23A (poles in series)		_	
		24V	A	25 (1)
		48V	A	25 (2)
		60V 110V	A A	25 (3)
		220V	A	12 (3) 10 (4)
	DC13	220 V		10 (4)
	D013	24V	Α	25
		48V	A	20
		60V	Α	16
		110V	Α	1.5
		220V	Α	0.4
Power dissipation			W	1.1
Mechanical features	;			
Terminals screw				M3.5
Tightening torque fo	r terminals max		Nm	0.8
Conductor size				
	AWG - Rigid cable			
		min	AWG	20
		Max	AWG	10
	AWG - Flexible cable			
		min	AWG	20
	Conductor size (IEC). Florible coble	Max	AWG	12
	Conductor size (IEC) - Flexible cable	min	mm²	0.5
		min Max	mm²	4
	Conductor size (IEC) - Rigid cable	IVICA	111111	
	Conductor Size (ize) Rigid dubic	min	mm²	0.5
		Max	mm²	4
Mechanical life			cycles	5x10 ⁶
JL technical data				
Motor power for dire	ect-on-line control			
	for three-phase motor			
		120V	HP	3
		240V	HP	5
		480V	HP	10
	-	600V	HP	15
	for single-phase motor			
		120V	HP	1.5
A mala i a natura a malitica mana		240V	HP	3
Ambient conditions				
Temperature	Operating temperature			
	Operating temperature	min	°C	-25
		min max	°C	-25 +55
	Storage temperature	шах	<u> </u>	FUU
	Glorage temperature	min	°C	-40
		max	°C	+70
		· · · · · · · · · · · · · · · · · · ·		

ENERGY AND AUTOMATION

electric ROTARY CAM SWITCH 7GN SERIES, CHANGEOVER SWITCH WITHOUT 0, 1 POLE 25A, FOR REAR MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM


Resistance & Protection

Frontal IP degree

Terminals IP degree


IP00

Dimensions

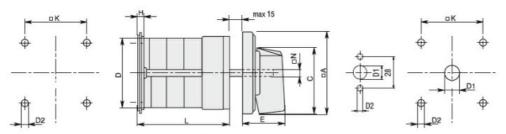

Series	Dimensions							L Number of elements												
	□A	С	ØD	ØD2	Е	Н	□K	□N	1	2	3	4	5	6	7	8	9	10	11	12
7GN12	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN20	48	39.5	39	5	26.5	5	36	6	38.1	47.8	57.5	67.2	76.9	86.6	96.3	106	115.7	125.4	135.1	144.8
7GN25	48	39.5	43	5	26.5	5	36	6	42.5	56.1	69.7	83.3	96.9	110.5	124.1	137.7	151.3	164.9	178.5	192.1
7GN32	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN40	65	53	58	5	34.5	5.5	48	7	48.5	63.6	78.7	93.8	108.9	124	139.1	154.2	169.3	184.4	199.5	214.6
7GN63	65	53	62	6	34.5	7.5	68	7	53.3	71.4	89.5	107.6	125.7	143.8	161.9	180	198.1	216.2	234.3	252.4
7GN125	90	70.5	86	6	41.4	7.5	68	9	74.8	103.9	133	162.1	191.2	220.3	249.4	278.5	307.6	336.7	365.8	394.9

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -Selector switch, complete