




# Catamount®

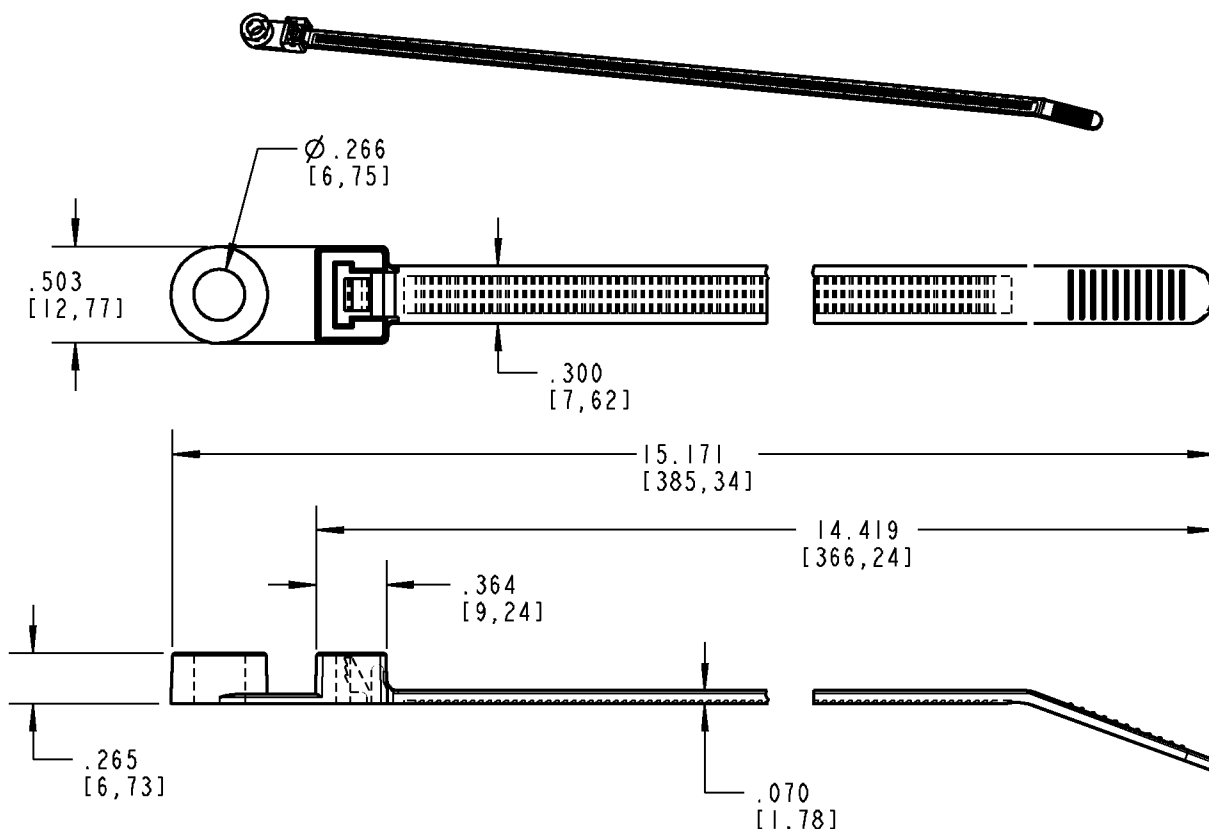

#### NOTES:

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 120 LBS [534 N]
5. MAXIMUM WIRE BUNDLE: 4.000 [101,6]
6. MOUNTING HEAD SCREW SIZE: #10 [M4]
7. INSTALLATION TOOL/SETTING: ERG120/6-8
8. STANDARD PACKAGE QUANTITY = 100

#### CATALOG NUMBER

**L - 14 - 120MH - \* - C**

\* = COLOR CODE: 0 = BLACK 3 = ORANGE 6 = BLUE 9 = NATURAL 17 = FLUORESCENT YELLOW  
1 = BROWN 4 = YELLOW 7 = PURPLE 11 = FLUORESCENT PINK 18 = FLUORESCENT GREEN  
2 = RED 5 = GREEN 8 = GRAY 16 = FLUORESCENT ORANGE 20 = FLUORESCENT BLUE

#### GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.

#### REVISIONS

SEE ERN ( \*\*\*\* )  
FOR APPROVAL SIGNATURES  
& RELEASE DATE.  
PROJECT NO: \*\*\*\*

**Thomas & Betts**  
www.tnb.com

DESCRIPTION: **14" SERIES 120 MOUNTING HEAD  
HEAVY DUTY CABLE TIE**

ORIGINAL PROJECT NO / ( ERN NO )

**FM40182 / ( 2007414 )**

SHEET NO:

**1 OF 1**

REV. NO:

**-**

DRAWING NO:

**WSD-000304**