




Catamount®

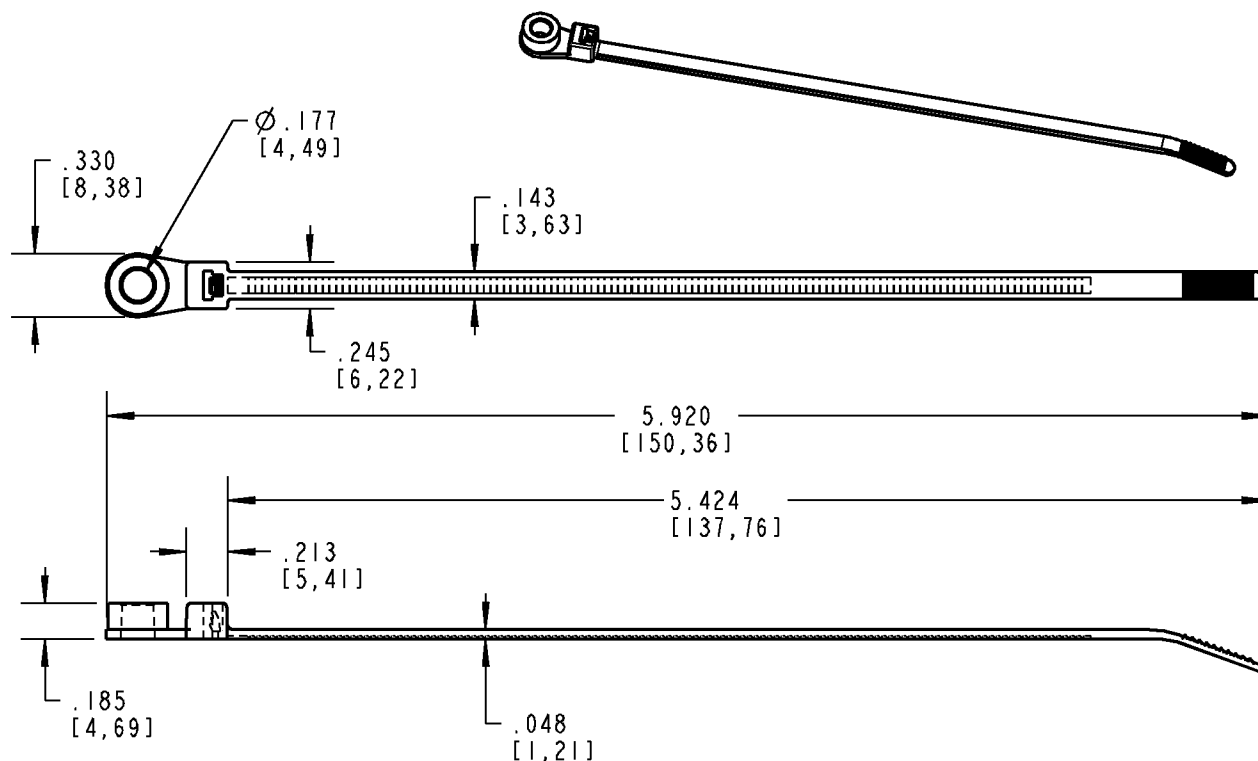

NOTES:

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 30 LBS [133 N]
5. MAXIMUM WIRE BUNDLE: 1.250 [31,75]
6. MOUNTING HEAD SCREW SIZE: #8 [M4]
7. INSTALLATION TOOL/SETTING: ERG50/3-5

CATALOG NUMBER

L - 5 - 30MH - * - **

* = COLOR CODE: 0 = BLACK 4 = YELLOW 8 = GRAY 17 = FLUORESCENT YELLOW
1 = BROWN 5 = GREEN 9 = NATURAL 18 = FLUORESCENT GREEN
2 = RED 6 = BLUE 11 = FLUORESCENT PINK 20 = FLUORESCENT BLUE
3 = ORANGE 7 = PURPLE 16 = FLUORESCENT ORANGE

** = PACKAGING: C= STD PKG (100) M= BULK PKG (1,000)

FLUORESCENT COLORS NOT "UL" LISTED OR RECOGNIZED

GENERAL NOTES		Thomas & Betts www.tnb.com			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.	2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.				
REVISIONS		DESCRIPTION: 5" SERIES 30 MOUNTING HEAD INTERMEDIATE CABLE TIES			
-	SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****				
ORIGINAL PROJECT NO / (ERN NO)		SHEET NO:	REV. NO:	DRAWING NO:	
FM401182 / (20007102)		1 OF 1	-	WSD-000054	