


Catamount®

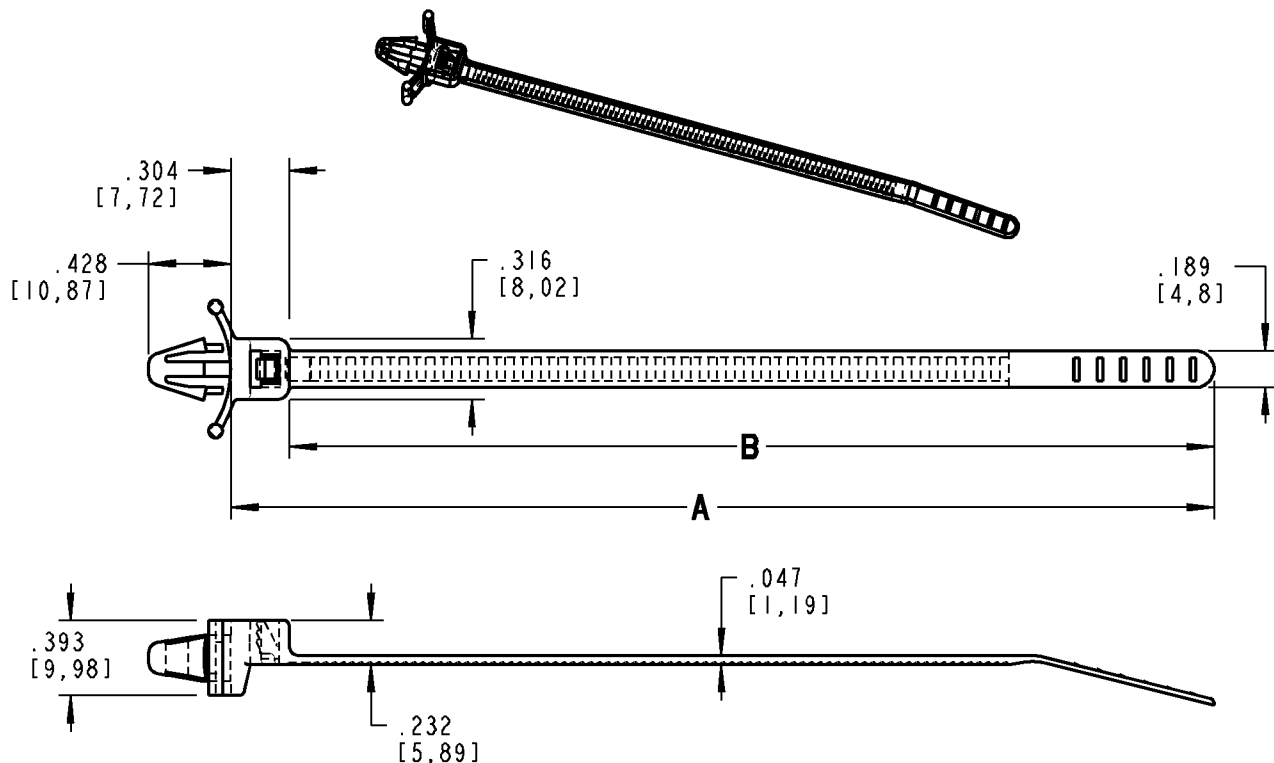

NOTES:

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 50 LBS [220 N]
5. MAXIMUM WIRE BUNDLE: SEE TABLE
6. PANEL MOUNTING HOLE SIZE: Ø.250 [6,35]
7. MAXIMUM PANEL THICKNESS: .105 [2,66]
8. INSTALLATION TOOL/SETTING: ERG50/6-8 OR ERG120/1-4

CATALOG NUMBER	MAXIMUM WIRE BUNDLE	A	B
L-5-50PM-**-**	1.000 [25,4]	5.128 [130,25]	4.824 [122,52]
L-7-50PM-**-**	1.750 [44,45]	7.472 [189,78]	7.168 [182,06]

* = COLOR CODE- 0 = BLACK
9 = NATURAL

** = PACKAGING- C = STD PKG (100) D = BULK PKG (500)

GENERAL NOTES		<div>Thomas & Betts</div> <div>www.tnb.com</div>			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.					
REVISIONS		DESCRIPTION: 5", 7" STANDARD SERIES 50 PUSH MOUNT CABLE TIES			
-	SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****	ORIGINAL PROJECT NO / (ERN NO) FM401182 / (2007477)	SHEET NO: 1 OF 1	REV. NO: -	DRAWING NO: WSD-000315