


Catamount®

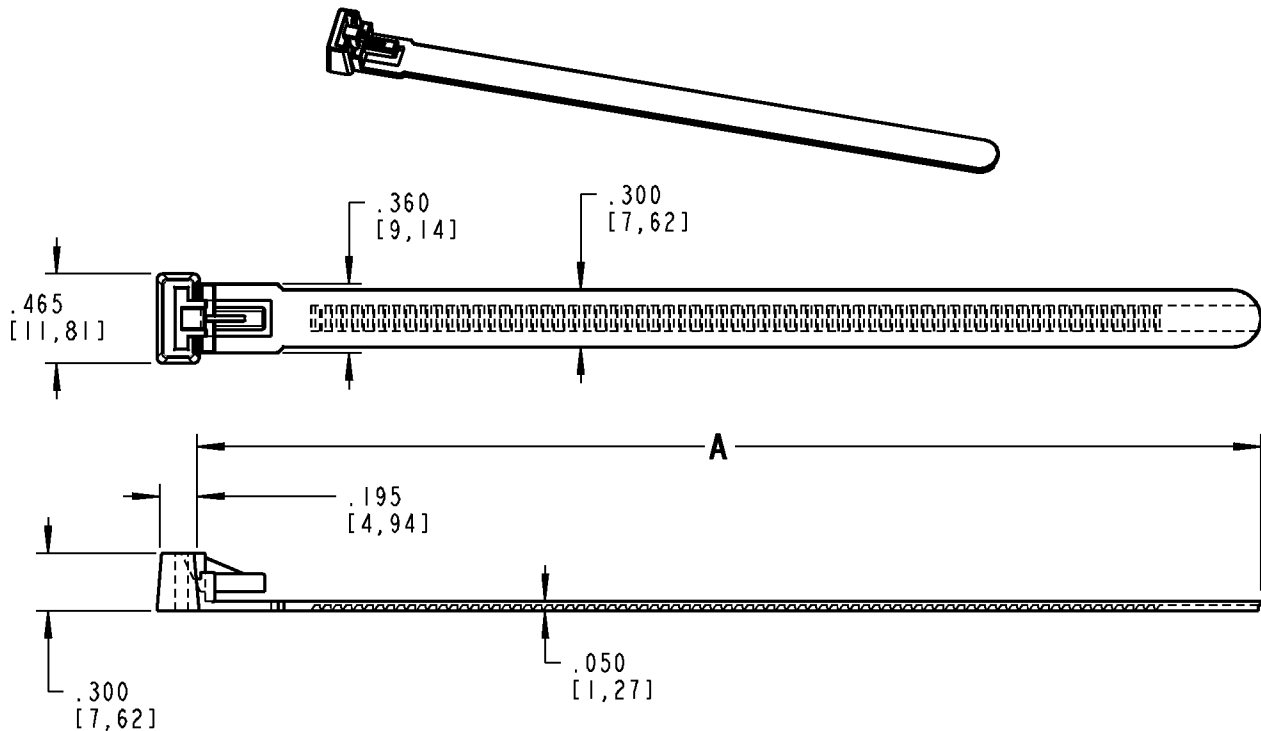

NOTES:

1. MATERIAL: NYLON 6,6
2. FLAMMABILITY: UL94V-2
3. OPERATING TEMPERATURE RANGE: -40°F [-40°C] TO 185°F [85°C]
4. MINIMUM TENSILE RATING: 50 LBS [222 N]
5. MAXIMUM WIRE BUNDLE: SEE TABLE
6. INSTALLATION TOOL/SETTING: ERG50/6-8 or ERG120/1-4

CATALOG NUMBER	MAX. WIRE BUNDLE DIA.	A
L-5-50R-**-**	1.250 [31,75]	5.547 [140,89]
L-8-50R-**-**	2.000 [50,8]	7.757 [197,02]
L-10-50R-**-**	3.000 [76,2]	11.057 [280,84]

* = COLOR CODE: 0 = BLACK 3 = ORANGE 6 = BLUE 9 = NATURAL 17 = FLUORESCENT YELLOW
 1 = BROWN 4 = YELLOW 7 = PURPLE 11 = FLUORESCENT PINK 18 = FLUORESCENT GREEN
 2 = RED 5 = GREEN 8 = GRAY 16 = FLUORESCENT ORANGE 20 = FLUORESCENT BLUE

** = PACKAGING: C = STD PKG (100) D = BULK PKG (500)

GENERAL NOTES		Thomas & Betts www.tnb.com			
1. ALL DIMENSIONS ARE FOR REFERENCE ONLY. 2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.					
REVISIONS		DESCRIPTION: 5", 8", 10" SERIES 50 STANDARD RELEASABLE CABLE TIES			
-	SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO: ****	ORIGINAL PROJECT NO / (ERN NO) FM401182 / (2007414)	SHEET NO: 1 OF 1	REV. NO: -	DRAWING NO: WSD-000311