

SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 568A



Product designation Product type designation				Soft Starter ADX Asynchronous
Motor type				three phase
Electrical features				
Supplies voltage				
		Type of system		Three phase
		Rated supply voltage	V	208415VAC
		auxiliary supply voltage (Us)		208240VAC
Data Late to a constitution		Rated frequency	Hz_	50/60
Rated starter current le			A	568
Rated motor power	IFC ratings (T<40°C)			
	IEC ratings (T≤40°C)	230VAC	kW	160
		400VAC	kW	315
		500VAC	KW	400
	UL ratings (T≤40°C)	300 VAC	IXVV	400
	02 raings (1=10-0)	220-240VAC	HP	200
		380-415VAC	HP	350
		440-480VAC	HP	400
Number of controlled	phases		Nr.	3
_				No, predisposed
Built-in bypass				for external
				bypass contactor
Cooling System				Forced
Programming interfact	e			
Display				Backlit LCD 2x16
	O to the classes			character
Programming with NF	C technology			No
Optical port Startup and stop settir	200			No
Startup and Stop Settil	igs			Torque or voltage
Startup method				ramp with current
Otalitap motiloa				limitation
				Torque ramp,
Stop method				voltage ramp,
				free-wheel stop
Braking method				DC dynamic with
				external relay
Protections				
Auxiliary supply protect	ction			Voltage too low





SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 568A

	No power phace
	No power, phase loss, phase
	sequence,
Power supply Protection	frequency out of
	limits, minimum
	and maximum
	voltage
	Overload at
	starting (trip class
	2, 10A, 10, 15, 20, 25, 30, 35
	and 40), overload
	during running
Motor protection	(trip class 2, 10A,
	10, 15, 20, 25
	and 30), locked
	rotor, current
	asymmetry,
	minimum torque (dry run),
	Overcurrent,
	overtemperature,
	bypass failure,
Starter protection	phase shorted,
Starter protection	temperature
	sensor fault,
	maintenance
Functions	request
Built-in hypass	3
Built-in bypass Built-in display and keypad	No.
Built-in display and keypad	No
Built-in display and keypad Languages	No Yes
Built-in display and keypad Languages View measurements	No Yes 4
Built-in display and keypad Languages View measurements Torque control	No Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit	No Yes 4 Yes Yes
Built-in display and keypad Languages View measurements Torque control	No Yes 4 Yes Yes Yes Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function	No Yes 4 Yes Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking	No Yes 4 Yes Yes Yes Yes Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection	No Yes 4 Yes Yes Yes Yes Yes Yes Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input	No Yes 4 Yes Yes Yes Yes Yes Yes Yes Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against thyristor overtemperature Protection against low load	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	No Yes 4 Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication	No Yes 4 Yes Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log	No Yes 4 Yes No
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against locked rotor Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log Motor hour counter	No Yes 4 Yes No Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log	No Yes 4 Yes No



3 / 5



SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 568A

Remote external keypad			Yes
Plug-in version			Optional
Input and Output			
Digital inputs	Number of digital input	Nr.	3 (2 digital inputs + 1 digital/analog input)
	Digital input type		24VDC (no need for external feeder) 1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor
Analog inpute	Digital input functions		preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second moto
Analog inputs	Number of analog input	Nr.	1 (digital/analog) 0-10VDC (0-
	Analog input type		20mA with external resistor 500Ω) Motor protection via PTC probes, acceleration and/or deceleration ramp via analog
	Analog input functions		input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable
Digital outputs	Number of digital output	Nr.	4 3 x 1 NO (SPST)
	Digital output arrangement		+ 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15






SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 568A

		Digital output functions		C/O output for global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
Analog outputs		Number of analog output	Nr.	1 020mA,
		Analog output type		420mA (010V with external resistor 500Ω)
		Analog output functions		Current, torque, motor thermal status, power factor and active power
Ambient conditions				
Temperature				
	Operating temperature		0.0	40
		min	°C	-10
				±55°C (with
		max	°C	+55°C (with current derating >45°C of 1.5%/
	2	max	°C	current derating
	Storage temperature			current derating >45°C of 1.5%/ °C)
	Storage temperature	min	°C	current derating >45°C of 1.5%/ °C)
	Storage temperature			current derating >45°C of 1.5%/ °C) -30 +70
Max altitude	Storage temperature	min	°C	current derating >45°C of 1.5%/ °C) -30 +70 1000 without derating (over 1000mt with current derating
Max altitude Relative humidity	Storage temperature	min	°C	current derating >45°C of 1.5%/ °C) -30 +70 1000 without derating (over 1000mt with
	Storage temperature	min	°C °C	current derating >45°C of 1.5%/ °C) -30 +70 1000 without derating (over 1000mt with current derating of 0.5%/100m) 95% without condensation or
Relative humidity	Storage temperature	min	°C °C	current derating >45°C of 1.5%/°C) -30 +70 1000 without derating (over 1000mt with current derating of 0.5%/100m) 95% without condensation or dripping
Relative humidity Pollution degree	Storage temperature	min	°C °C	current derating >45°C of 1.5%/°C) -30 +70 1000 without derating (over 1000mt with current derating of 0.5%/100m) 95% without condensation or dripping
Relative humidity Pollution degree Housing Mounting IP degree of protectio	n	min	°C °C	current derating >45°C of 1.5%/°C) -30 +70 1000 without derating (over 1000mt with current derating of 0.5%/100m) 95% without condensation or dripping 3
Relative humidity Pollution degree Housing Mounting	n	min	°C °C	current derating >45°C of 1.5%/°C) -30 +70 1000 without derating (over 1000mt with current derating of 0.5%/100m) 95% without condensation or dripping 3 Screw-fixing
Relative humidity Pollution degree Housing Mounting IP degree of protectio	n	min	°C °C m	current derating >45°C of 1.5%/ °C) -30 +70 1000 without derating (over 1000mt with current derating of 0.5%/100m) 95% without condensation or dripping 3 Screw-fixing IP00

SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 568A

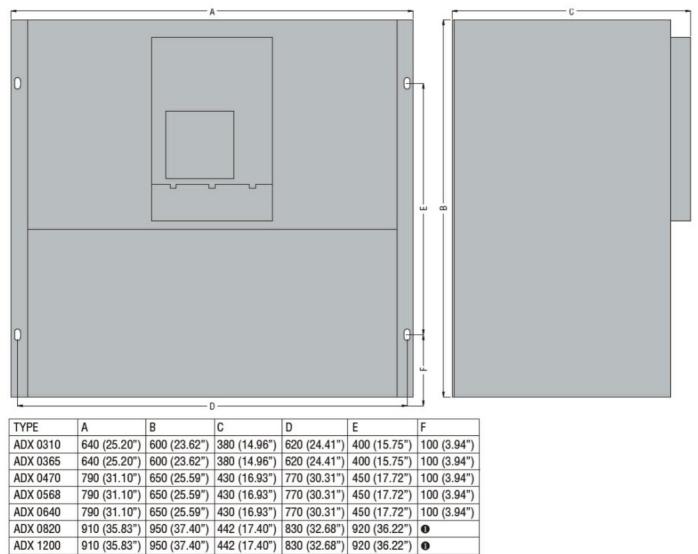

O Consult Customer Service; see contact details on inside front cover.

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-2

Certificates

EAC

ETIM classification

ETIM 8.0 EC000640 - Soft starter