



Soft starter  
advanced  
ADXNP  
Asynchronous  
three phase

Product designation

Product type designation

Motor type

**Electrical features**

Supplies voltage

Type of system		Three phase
Rated supply voltage	V	208...600VAC
auxiliary supply voltage (Us)		100...240VAC
Rated frequency	Hz	50/60
Rated starter current Ie	A	38

Rated motor power

IEC ratings (T≤40°C)

230VAC	kW	11
400VAC	kW	18.5
500VAC	KW	22

UL ratings (T≤40°C)

220-240VAC	HP	10
380-415VAC	HP	20
440-480VAC	HP	25
550-600VAC	HP	30

Number of controlled phases

Nr. 2

Built-in bypass

Yes

Cooling System

Forced

Rated insulation voltage Ui

V 600

**Programming interface**

Potentiometer

Settings: starting voltage, acceleration ramp, deceleration ramp. Note. Potentiometers can be disabled via NFC.

Display

No

Programming with NFC technology

Yes

Optical port

Yes

**Startup and stop settings**

Startup method

Voltage ramp with current limit

Stop method

Voltage ramp or free-wheel stop

Acceleration ramp

s 1-20

Deceleration ramp

s 0-20

Startup voltage	%	30-80
<b>Protections</b>		
Power supply Protection		No power line, phase loss, frequency out of limits, minimum and maximum voltage and phase sequence
Motor protection		Electronic current thermal protection (overload), locked rotor, current asymmetry, load too low, starting too long
Starter protection		Overtemperature and overcurrent
<b>Functions</b>		
Built-in bypass		2
Built-in display and keypad		Yes
Languages		No
View measurements		No
Torque control		No
Adjustable current limit		No
Dynamic braking		Yes
Kick Start function		No
Motor overload electronic protection		No
Motor protection PTC input		Yes
Protection against phase loss		No
Protection against phase inversion		Yes
Protection against locked rotor		Yes
Protection against thyristor overtemperature		Yes
Protection against low load		Yes
Programmable alarm		Yes
Digital inputs		Yes
Analog inputs		Yes
Digital outputs		No
Analog output		Yes
Monitoring communication		No
Optical port for programming		Optional
Event log		Yes
Motor hour counter		No
Startup counter		Yes
Clock calendar		Yes
Remote external keypad		No
Plug-in version		No

<b>Input and Output</b>		
Digital inputs	Number of digital input	Nr. 1
	Digital input type	Volt-free contact
	Digital input functions	Motor start

Digital outputs

Number of digital output	Nr.	2
Digital output arrangement		2 NO contacts with the same common, 5A 250VAC AC1 - 5A 30 VDC
Digital output functions		Programmable: line contactor (Run), TOR (Top Of Ramp), alarm, max torque

Communication interfaces

Communication interface		NFC, optical port for the connection of USB (CX01) and Wi-Fi (CX02) devices, optional RS485 module (CX04) Modbus RTU protocol
-------------------------	--	---

Ambient conditions

Temperature

Operating temperature

min	°C	-20
max	°C	+60°C (with current derating >40°C)

Storage temperature

min	°C	-30
max	°C	+80

Max altitude

m	1000 without derating of the starter current
---	--

Relative humidity

%	<80%
---	------

Pollution degree

	2
--	---

Installation category

	III
--	-----

Housing

Mounting

	Screw-fixing or 35mm DIN rail (IEC/EN/BS 60715)
--	---

IP degree of protection

	IP20
--	------


Dimensions (W x H x D)

mm	45 x 159 x 128.4
----	------------------

Weight

Kg	0.69
----	------

Dimensions

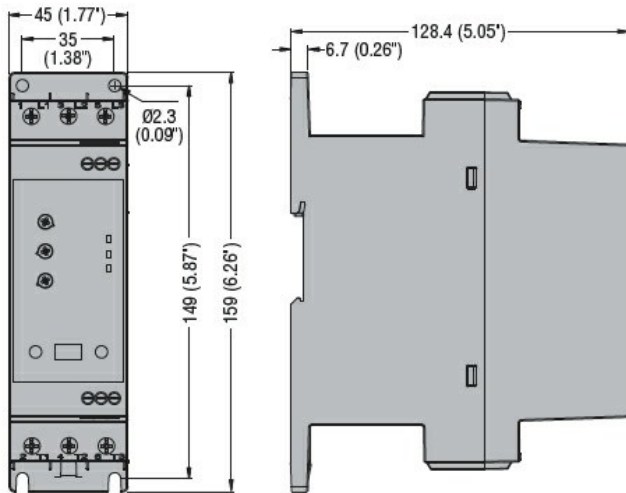

### Certifications and compliance

#### Compliance

CSA C22.2 n° 60947-4-2

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-2

UL 60947-4-2

#### Certificates

cULus

EAC

RCM (pending)

### ETIM classification

ETIM 8.0

EC000640 - Soft  
starter