



SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 470A



Product designation				Soft Starter
Product type designat	ion			ADX
Motor type				Asynchronous
Electrical features				three phase
Supplies voltage				
Supplies voltage		Type of system		Three phase
		Rated supply voltage	V	208415VAC
		auxiliary supply voltage (Us)	V	208240VAC
		Rated frequency	Hz	50/60
Rated starter current I	e	rated nequency	A	470
Rated motor power				•
	IEC ratings (T≤40°C)			
	3 (1 1)	230VAC	kW	132
		400VAC	kW	250
		500VAC	KW	315
	UL ratings (T≤40°C)			
		220-240VAC	HP	150
		380-415VAC	HP	250
		440-480VAC	HP	350
Number of controlled	phases		Nr.	3
Built-in bypass				No, predisposed for external
				bypass contactor
Cooling System				Forced
Programming interface	e			
Display				Backlit LCD 2x16 character
Programming with NF	C technology			No
Optical port				No
Startup and stop settir	ngs			
Startup method				Torque or voltage ramp with current limitation
Stop method				Torque ramp, voltage ramp, free-wheel stop
Braking method				DC dynamic with external relay
Protections				
A !!!	4!			\

Auxiliary supply protection

Voltage too low





SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 470A

Power supply Protection	No power, phase loss, phase sequence, frequency out of limits, minimum and maximum voltage Overload at
Motor protection	starting (trip class 2, 10A, 10, 15, 20, 25, 30, 35 and 40), overload during running (trip class 2, 10A, 10, 15, 20, 25 and 30), locked rotor, current asymmetry, minimum torque (dry run),
Starter protection	Overcurrent, overtemperature, bypass failure, phase shorted, temperature sensor fault, maintenance request
Functions	
	0
Built-in bypass	3
Built-in bypass Built-in display and keypad	No
Built-in bypass Built-in display and keypad Languages	No Yes
Built-in bypass Built-in display and keypad Languages View measurements	No Yes 4
Built-in bypass Built-in display and keypad Languages View measurements Torque control	No Yes 4 Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit	No Yes 4 Yes Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking	No Yes 4 Yes Yes Yes Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function	No Yes 4 Yes Yes Yes Yes Yes Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection	No Yes 4 Yes Yes Yes Yes Yes Yes Yes Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input	No Yes 4 Yes Yes Yes Yes Yes Yes Yes Yes Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss	No Yes 4 Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion	No Yes 4 Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor	No
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature	No
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load	No
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm	No Yes 4 Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load	No Yes 4 Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs	No Yes 4 Yes Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs	No Yes 4 Yes Yes
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs	No
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming	No
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log	No
Built-in bypass Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log Motor hour counter	No Yes 4 Yes No Yes
Built-in display and keypad Languages View measurements Torque control Adjustable current limit Dynamic braking Kick Start function Motor overload electronic protection Motor protection PTC input Protection against phase loss Protection against phase inversion Protection against locked rotor Protection against thyristor overtemperature Protection against low load Programmable alarm Digital inputs Analog inputs Digital outputs Analog output Monitoring communication Optical port for programming Event log	No





SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 470A

Remote external keypad			Yes
Plug-in version			Optional
Input and Output			
Digital inputs	Number of digital input	Nr.	3 (2 digital inputs + 1 digital/analog input)
	Digital input type		24VDC (no need for external feeder) 1 input for start, 1 input programmable (stop, free-wheel stopping, external alarm, motor
	Digital input functions		preheat, local control, alarms inhibit, manual resetting of motor thermal protection, keypad lock, second moto
Analog inputs	Number of analog input	Nr.	1 (digital/analog) 0-10VDC (0-
	Analog input type		20mA with external resistor 500Ω) Motor protection via PTC probes, acceleration and/or deceleration
	Analog input functions		ramp via analog input, analog input thresholds for motor starting and stopping, analog input thresholds for programmable relay enable
Digital outputs	Number of digital output	Nr.	4 3 x 1 NO (SPST)
	Digital output arrangement		+ 1 C/O (SPDT) Ratings: 5A 250VAC AC1, 2A 250VAC AC15






SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 470A

		Digital output functions		C/O output for global alarm, 3 x 1NO outputs programmable (OFF, motor powered, up to speed, braking, current limit, service required, cascade starting, programmable input thresholds, alarm Axx)
Analog outputs		Number of analog output	Nr.	1 020mA,
		Analog output type		420mA (010V with external resistor 500Ω) Current, torque,
		Analog output functions		motor thermal status, power factor and active power
Ambient conditions				
Temperature				
	Operating temperature	<u>.</u>		
		min	°C	-10 +55°C (with
		max	°C	current derating >45°C of 1.5%/ °C)
	Storage temperature			
	5 1	min	°C	-30
		max	°C	+70
Max altitude			m	1000 without derating (over 1000mt with current derating of 0.5%/100m)
Relative humidity			%	95% without condensation or dripping
Pollution degree				3
Housing				
Mounting				Screw-fixing
IP degree of protection	n			IP00
Dimensions (W x H x D)			mm	790 x 650 x 430
Weight	•		Kg	95
Dimensions				

SOFT STARTER, ADX... TYPE, FOR SEVERE DUTY (STARTING CURRENT 5•IE). PREDISPOSED FOR EXTERNAL BY-PASS CONTACTOR, 470A

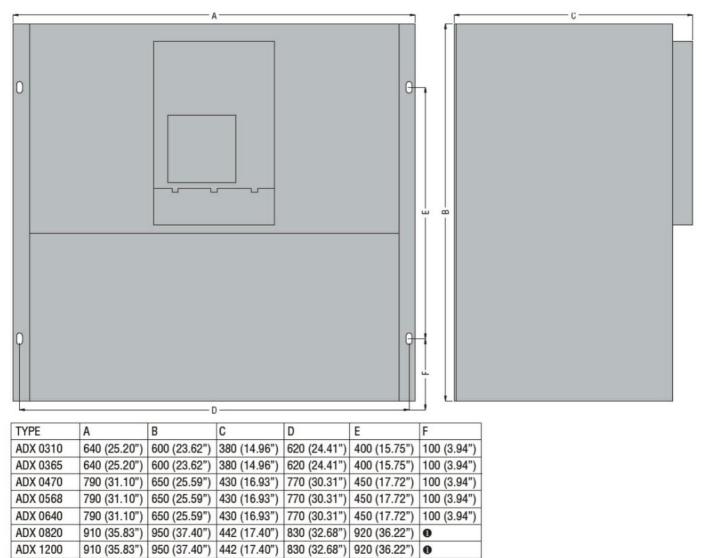

O Consult Customer Service; see contact details on inside front cover.

Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-2

Certificates

EAC

ETIM classification

ETIM 8.0 EC000640 - Soft starter