


Armored Cable/Flexible Metallic Conduit Fittings



Snap-In Connector for Flexible Metal Conduit — 105° C Rated

- No locknut required
- High-impact thermoplastic with steel insert
- No special tools required

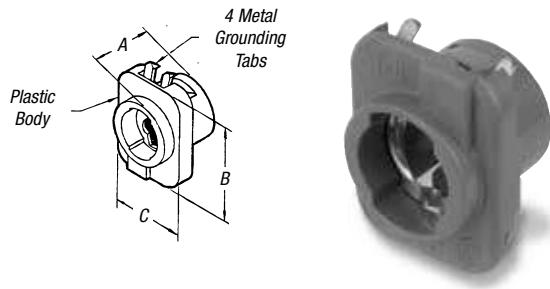

CAT. NO.	CONDUIT SIZE (IN.)	KO SIZE (IN.)	UNIT QTY.	STD. CTN.
100-TB	3/8	1/2	50	500
100BP	3/8	1/2	250	1,000

Straight Set-Screw Connectors — Non-Insulated Die-Cast Zinc



XC-220SC

XC-221
XC-821



DIMENSIONS (IN.)				
CAT. NO.	SIZE (IN.)	A (MIN.)	A (MAX.)	B
XC-220SC	3/8 (1/2 KO)	.38	.63	.84
XC-221	1/2	.74	.94	1.46
XC-821	1/2	.74	.94	1.46

XC-220 and XC-221: UL File No. E-1383 3/4".
UL File No. E-23018 1/2".
XC-821: UL File No. E-1275 1/2".

BX Flex Bushings — Anti-Short

- Packed in polybags
- Available bulk packed — 10,000 per carton
- Plastic




CAT. NO.	FITS STANDARD CABLE RANGE	UNIT SIZE	QTY.	STD. CTN.
IT 100 SC	14/2-14/3-12/2	0	100	100
IT-101	14/4-12/3-6/1-4/1	1	100	35
IT-102	12/4-10/2-10/3-2/1	2	50	50
IT-103	10/4-8/2-8/3-1/1	3	50	50
IT-104	8/4-6/2-6/3-4/2-4/3-6/4	4	50	50

Ordered by Bags.

Note: For die-cast armored cable/flexible metallic conduit fittings and combination fittings, see Steel City® Die-Cast Conduit Fittings, pages E-550-E-552.

BX Flex Saddle-Type Connectors — Die-Cast Zinc



DIMENSIONS (IN.)				
CAT. NO.	SIZE (IN.)	A (MIN.)	A (MAX.)	B
XC-2200-C	3/8	.12	.63	.98