



# KTM-WP11101PS08

KTM

CONTRAST SENSORS

**SICK**  
Sensor Intelligence.



### Ordering information

| Type            | Part no. |
|-----------------|----------|
| KTM-WP11101PS08 | 1095813  |

Other models and accessories → [www.sick.com/KTM](http://www.sick.com/KTM)

Illustration may differ



### Detailed technical data

#### Features

|                                   |  |
|-----------------------------------|--|
| <b>Dimensions (W x H x D)</b>     | 12 mm x 31.5 mm x 21 mm  |
| <b>Sensing distance</b>           | ≤ 12.5 mm  |
| <b>Sensing distance tolerance</b> | ± 3 mm   |
| <b>Housing design</b>             | Small  |
| <b>Light source</b>               | LED, RGB <sup>1)</sup>   |
| <b>Wave length</b>                | 470 nm, 525 nm, 625 nm   |
| <b>Light emission</b>             | Long side of housing   |
| <b>Light spot size</b>            | 1.6 mm x 9.5 mm  |
| <b>Light spot direction</b>       | Vertical <sup>2)</sup>   |
| <b>Receiving filters</b>          | None   |
| <b>Adjustment</b>                 | Teach-in button  |
| <b>Teach-in mode</b>              | 2-point teach-in static/dynamic + proximity to mark<br>ET: Teach-in dynamic: Q-signal switches during teach-in (up to 10 ms time delay for 1st mark) |

<sup>1)</sup> Average service life: 100,000 h at T<sub>U</sub> = +25 °C.

<sup>2)</sup> In relation to long side of housing.

#### Mechanics/electronics

|                       |                                   |
|-----------------------|-----------------------------------|
| <b>Supply voltage</b> | 12 V DC ... 24 V DC <sup>1)</sup> |
| <b>Ripple</b>         | ≤ 5 V <sub>pp</sub> <sup>2)</sup> |

<sup>1)</sup> Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

<sup>2)</sup> May not exceed or fall below U<sub>v</sub> tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> With light/dark ratio 1:1.

<sup>5)</sup> Signal transit time with resistive load.

<sup>6)</sup> Total current of all Outputs.

|   |   |
|---|---|
| <b>Current consumption</b>                        | < 50 mA <sup>3)</sup>   |
| <b>Switching frequency</b>                        | 15 kHz <sup>4)</sup>  |
| <b>Response time</b>                              | 32 µs <sup>5)</sup>   |
| <b>Jitter</b>                                     | 15 µs   |
| <b>Switching output</b>                           | PNP   |
| <b>Switching output (voltage)</b>                 | PNP: HIGH = $U_V \leq 2 \text{ V}$ / LOW approx. 0 V  |
| <b>Switching mode</b>                             | Dark switching  |
| <b>Output current <math>I_{\text{max}}</math></b> | 50 mA <sup>6)</sup>   |
| <b>Retention time (ET)</b>                        | 28 ms, non-volatile memory  |
| <b>Time delay</b>                                 | None  |
| <b>Connection type</b>                            | Male connector M8, 4-pin  |
| <b>Protection class</b>                           | III   |
| <b>Circuit protection</b>                         | $U_V$ connections, reverse polarity protected<br>Output Q short-circuit protected<br>Interference pulse suppression |
| <b>Enclosure rating</b>                           | IP67  |
| <b>Weight</b>                                     | 20 g  |
| <b>Housing material</b>                           | Plastic, ABS  |
| <b>Optics material</b>                            | Plastic, PMMA   |
| <b>Indication</b>                                 | LED indicator green: power on<br>LED indicator, yellow: Status switching output Q                                   |

<sup>1)</sup> Limit values: DC 12 V (-10 %) ... DC 24 V (+20 %). Operation in short-circuit protected network max. 8 A.

<sup>2)</sup> May not exceed or fall below  $U_V$  tolerances.

<sup>3)</sup> Without load.

<sup>4)</sup> With light/dark ratio 1:1.

<sup>5)</sup> Signal transit time with resistive load.

<sup>6)</sup> Total current of all Outputs.

## Ambient data

|                                      |                              |
|--------------------------------------|------------------------------|
| <b>Ambient operating temperature</b> | -10 °C ... +55 °C            |
| <b>Ambient temperature, storage</b>  | -20 °C ... +75 °C            |
| <b>Shock load</b>                    | According to IEC 60068       |
| <b>UL File No.</b>                   | NRKH.E348498 & NRKH7.E348498 |

## Classifications

|                     |          |
|---------------------|----------|
| <b>ECLASS 5.0</b>   | 27270906 |
| <b>ECLASS 5.1.4</b> | 27270906 |
| <b>ECLASS 6.0</b>   | 27270906 |
| <b>ECLASS 6.2</b>   | 27270906 |
| <b>ECLASS 7.0</b>   | 27270906 |
| <b>ECLASS 8.0</b>   | 27270906 |
| <b>ECLASS 8.1</b>   | 27270906 |
| <b>ECLASS 9.0</b>   | 27270906 |
| <b>ECLASS 10.0</b>  | 27270906 |
| <b>ECLASS 11.0</b>  | 27270906 |


|                       |          |
|-----------------------|----------|
| <b>ECLASS 12.0</b>    | 27270906 |
| <b>ETIM 5.0</b>       | EC001820 |
| <b>ETIM 6.0</b>       | EC001820 |
| <b>ETIM 7.0</b>       | EC001820 |
| <b>ETIM 8.0</b>       | EC001820 |
| <b>UNSPSC 16.0901</b> | 39121528 |

### Connection/Pin assignment

|                        |                          |
|------------------------|--------------------------|
| <b>Connection type</b> | Male connector M8, 4-pin |
| <b>Pin assignment</b>  |                          |
| BN 1                   | + (L+)                   |
| WH 2                   | ET                       |
| BU 3                   | - (M)                    |
| BK 4                   | Q                        |

### Dimensional drawing (Dimensions in mm (inch))


KTM-Mxxxxx1P, KTM-Wxxxxx1P

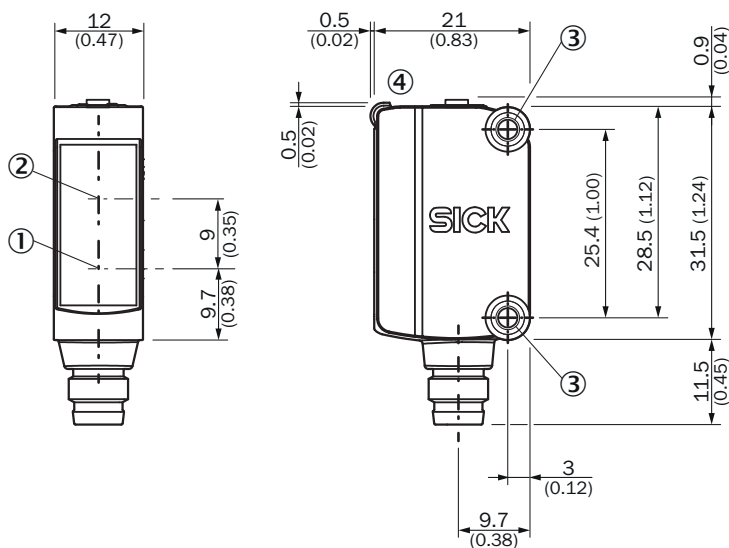

- ① Center of optical axis, sender
- ② Center of optical axis, receiver
- ③ Mounting holes M3
- ④ Display and adjustment elements

## Adjustments


Display and adjustment elements



- ① Teach-in button
- ② LED yellow
- ③ LED green

## Pin assignment

Connection type. see table: Connection/PIN assignment




Male connector, M8, 4-pin, uncoded

### Concept of operation


Teach-in dynamic

#### 1. Position background




Press the teach-in button and keep it pressed. LED flashing slowly.


#### 2. Move at least the mark and background using the light spot.



Keep the teach-in button > 3 < 30 s pressed.





Release the teach-in button.



Yellow LED will illuminate, when emitted light is on the mark.

#### Example

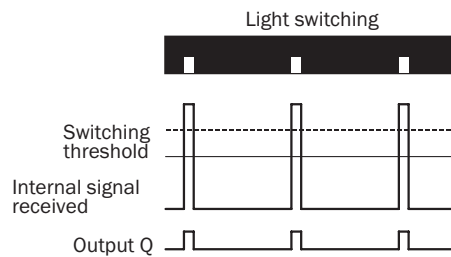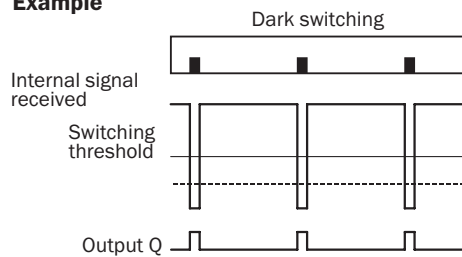


Teach via Teach button  
like standard KTM but darkswitching

- Q-Signal switches during teach-in
- Up to 10ms time delay at the 1. mark
- Only for dark marks on bright background


Setting the switching threshold (dynamic)

**1. Position background**




Press the teach-in button and keep it pressed. LED flashing slowly.


**2. Move at least the mark and background using the light spot.**



Keep the teach-in button  $> 3 < 30$  s pressed.




Release the teach-in button.



Yellow LED will illuminate, when emitted light is on the mark.

**Example**

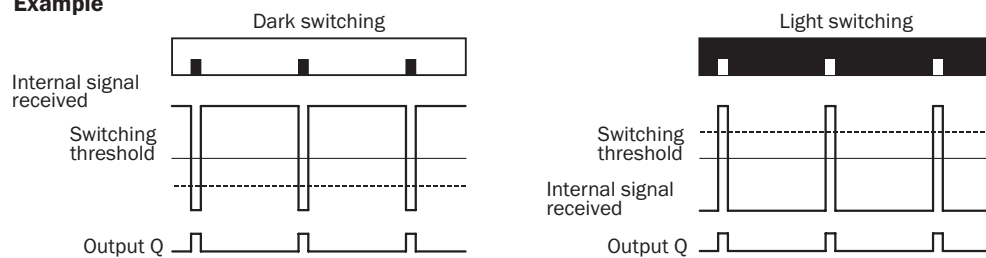

**Switching characteristics**

The optimum emitted light is selected automatically (at RGB variants).

Static teach-in: light/dark setting is defined using teach-in sequence.

Dynamic teach-in: switching output active on mark, if background is longer in the field of view during the teach-in.

The switching threshold is set in the center between the background and the mark.

If the button is pressed again within 10 s of the teach ( $> 20$  ms  $< 10$  s), the relative switching threshold is placed 75 % between mark (100 %) and background (0 %) (dotted line in Figure).

Teach-in can also be performed using an external control signal.


Keylock activation and deactivation: hold down teach-in button  $> 30$  s.

Teach-in failure: yellow LED indicator and the transmitted light of the sensor flashing quickly.

For dynamic teach-in with ET signal (5 Hz) via switching output Q.


Setting the switching threshold (static)

**1. Position mark**




Press and hold teach-in button > 1 < 3 s.  
 Yellow LED flashes slowly.

**2. Position background**





Press and hold teach-in button < 3 s.  
 Yellow LED goes out.

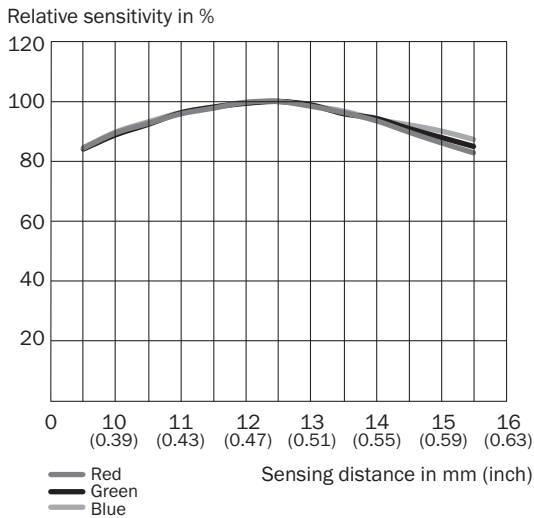**Sensing distance**




**Recommended accessories**

Other models and accessories → [www.sick.com/KTM](http://www.sick.com/KTM)

|   | <b>Brief description</b>   | <b>Type</b>        | <b>Part no.</b> |
|---|--|--------------------|-----------------|
| <b>Mounting brackets and plates</b>   |  |                    |                 |
|  | Mounting bracket for wall mounting, stainless steel, mounting hardware included  | BEF-W100-A         | 5311520         |
| <b>Plug connectors and cables</b>   |  |                    |                 |
|  | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Female connector, M8, 4-pin, straight, A-coded</li> <li>• <b>Connection type head B:</b> Flying leads</li> <li>• <b>Signal type:</b> Sensor/actuator cable</li> <li>• <b>Cable:</b> 5 m, 4-wire, PVC</li> <li>• <b>Description:</b> Sensor/actuator cable, unshielded</li> <li>• <b>Application:</b> Zones with chemicals</li> </ul> | YF8U14-050VA3XLEAX | 2095889         |



|   | Brief description  | Type               | Part no. |
|---|--|--------------------|----------|
|  | <ul style="list-style-type: none"><li>• <b>Connection type head A:</b> Female connector, M8, 4-pin, straight, A-coded</li><li>• <b>Connection type head B:</b> Male connector, M12, 4-pin, straight, A-coded</li><li>• <b>Signal type:</b> Sensor/actuator cable</li><li>• <b>Cable:</b> 5 m, 4-wire, PVC</li><li>• <b>Description:</b> Sensor/actuator cable, unshielded</li><li>• <b>Application:</b> Zones with chemicals</li></ul> | YF8U14-050VA3M2A14 | 2096609  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)