## RFN381400



MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 9...14A



Product designation			RFN38
Product type designation			Motor protection relay
General characteristics			
Number of poles		Nr.	3
Overvoltage category			
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	А	32
	aM (IEC)	А	16
	RK5 (UL)	Α	50
Phase failure detection			no
Reset mode			Manual or
			automatic
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	А	9.00
	Operational current max	Α	14
Tripping class			10A
Test Button			yes
Trip indicator			yes
Terminals			
	type		screw and
	(JPC		washer
	screw		M4
	width	mm	12.6
	tool		Phillips 2
Tightening torque for terminals			
	min	Nm	2
	max	Nm	2.5
	min	lbin	1.5
	max	lbin	1.8
Conductor section			
	AWG/kcmil max		8
Auxiliary circuit characteristics			
Auxiliary contacts			
	NO	Nr.	1

RFN381400



#### **RFN381400** MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 9...14A

	NC	Nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN		V	690
Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690
Operating current AC15			-
	24V	A	3
	120V	А	3
	240V	A	1.5
	380V	A	0.95
	480V	A	0.75
	500V	А	0.72
	600V	A	0.6
Operating current DC13			
	125V	Α	0.11
	600V	Α	0.22
IEC Conventional free air thermal current Ith		А	10
Terminals			
	Auxiliant aircuit tura		screw and
	Auxiliary circuit type		washer
	Auxiliary circuit screw		M3,5
	Auxiliary circuit width	mm	8
	Auxiliary circuit tool		Phillips 2
Conductor section			
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals	, , , , , , , , , , , , , , , , , , , ,		
	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	Ibin	0.59
	Auxiliary circuit max	Ibin	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			2000 11000
Operating temperature			
	min	°C	-25
	max	°C	60
Storage temperature	Παλ	0	00
Sidiaye lemperalule	min	°C	-50
		°C	
Componention temperature	max	U	70
Compensation temperature		° <b>^</b>	20
	min	°C °C	-20
Marca a Mitrada	max	°C	60
Max altitude		m	3000
Mechanical features			
Operating position			
	normal		Vertical plan
	allowable		±30°
			Direct mounting
Fixing			on BF09
			BF38
Weight		g	160
UL technical data			
Full-load current (FLA) for three-phase AC motor			
	at 480V	А	14
	at 600V	Α	14




# RFN381400

ENERGY AND AUTOMATION


MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 9...14A

Dimensions


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay



BF26 00A... - BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay

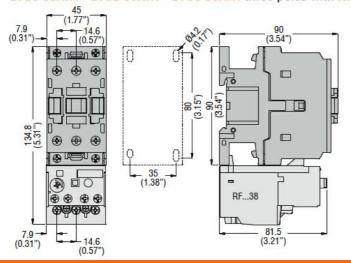

Wiring diagrams

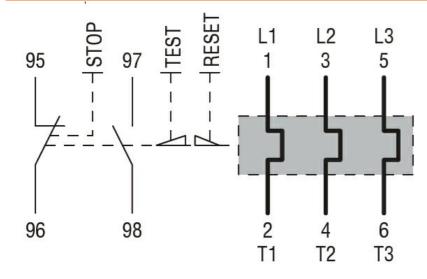

### Certifications and compliance

#### Compliance

CSA C22.2 n° 14 IEC/EN 60947-1

RFN381400



#### **RFN381400** MOTOR PROTECTION RELAY, NON PHASE FAILURE/NON SINGLE-PHASE SENSITIVE. THREE-POLE (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 9...14A

	IEC/EN 60947-4-1	
	UL508	
Certifications		
	CCC	
	cULus	
	EAC	
ETIM classification		
		EC000106

ETIM 8.0

EC000106 -Thermal overload relay