


Siemens S7


6EP7-300-1AA00




(2 x HE10-16 pts)

Cartes / board :
6ES7-321-1BH00-0AA0
6ES7-322-1BH00-0AA0

ABF-H16H●●●

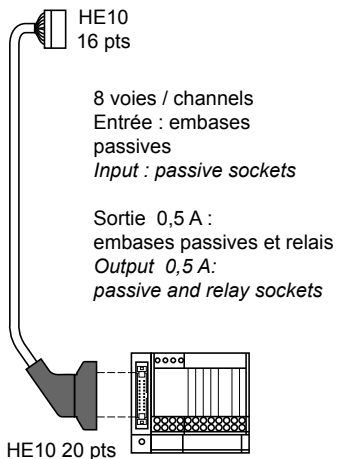

ABF-H32H●●●

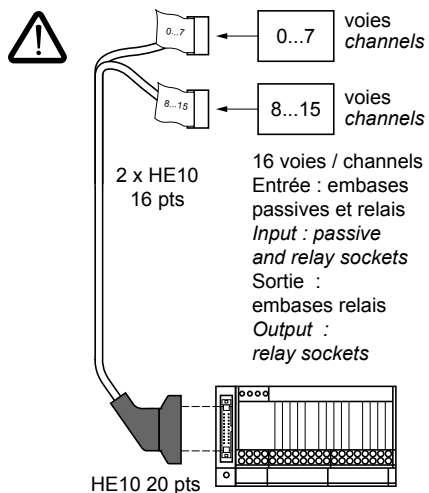

ABF-H16H●●● / ABF-H32H●●●

Raccordements - Wiring

ABF H16H150/300

ABF H32H150/300

Désign. Telefast 2		HE 10 16 pts 8 voies / channels (Siemens S7) n° broche / pin	
voies / channels 0 1 2 3 4 5 6 7	0	1	16
	1	2	14
	2	3	12
	3	4	10
	4	5	8
	5	6	6
	6	7	4
	7	8	2
NC	9		
NC	10		
NC	11		
NC	12		
+ 24VDC	13		
+ 24VDC	14		
+ 24VDC	15	9	
+ 24VDC	16	11	
+ 24VDC	17	13	
0VDC	18	1	
+ 24VDC	19	15	
0VDC	20	3	

Désign. Telefast 2		HE 10 14 pts 8 voies / channels (0-7/16-24) (Siemens S7) n° broche / pin		HE 10 14 pts 8 voies / channels (8-15/25-31) (Siemens S7) n° broche / pin	
voies / channels 0 1 2 3 4 5 6 7	0	1	16		
	1	2	14		
	2	3	12		
	3	4	10		
	4	5	8		
	5	6	6		
	6	7	4		
	7	8	2		
	9			16	
	10			14	
	11			12	
	12			10	
	13			8	
	14			6	
	15			4	
	16			2	
+ 24VDC	17		13		
0VDC	18		1		
+ 24VDC	19			13	
0VDC	20			1	



Afin d'optimiser la protection du cordon et de l'API, le fusible, de l'embase Telefast 2, conseillé est de type ultra rapide, calibre 2 à 4 A maxi.

In order to optimise the protection of the PLC cable, the fuse recommended for the Telefast 2 subbase is an ultra quick blow type, rated 2 to 4 A maximum.