




DIMENSIONS



ACCESSOIRES

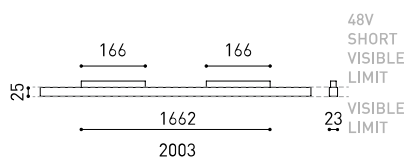

TRACK 48V OPTIONS

Nom	LINE 2000 48V DIM DALI 2700K N
Référence	A3763020N
Couleur	Noir Mat
RAL	Anodisé, bain coloré, similaire à RAL 9005
Catégorie	TRACKLIGHTS

Type	LED
Flux lumineux brut	6000 lm
Température de couleur	2700 K
Stabilité chromatique	MacAdam Step 2
Indice de reproduction chromatique	CRI > 90
Puissance	42 W
Courant	700 mA
Efficacité	143 lm/W
Durée de vie de la LED	L80B10 > 60.000h

Efficacité lumineuse	43%
Angle du faisceau lumineux	98°

Driver	Inclus
Valeurs de puissance du système	44,21 W
Tension	48Vdc
Variation d'intensité	DALI
Classe d'isolation électrique	II

Étanchéité	IP20
Contrôle sans fil	Veillez consulter
Type de rail	Track 48V
Poids	795 g
Poids avec emballage	1390 g
Dimensions de l'emballage	Ø55 x 2050 mm
Unités par emballage	1
Matériaux	Aluminium / Polycarbonate

PRODUIT

SOURCE DE LUMIÈRE

LUMINAIRE | DONNÉS PHOTOMÉTRIQUES

LUMINAIRE | DONNÉS ÉLECTRIQUES

D'AUTRES DONNÉES

Line 48V est le luminaire à lumière diffuse linéaire pour application sur rail à basse tension de 48V. Cette solution transfère à ce système de rails les caractéristiques d'éclairage et les avantages de l'éclairage longitudinal avec un diffuseur pour les applications d'éclairage général.

DIAGRAMME POLAIRE


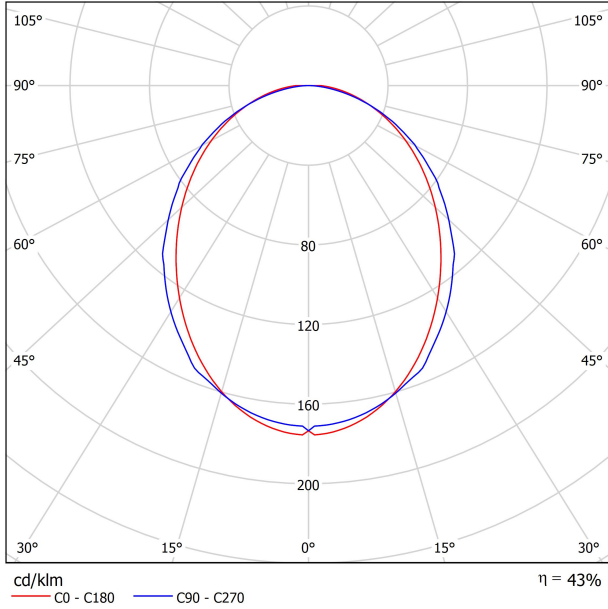



DIAGRAMME CONIQUE

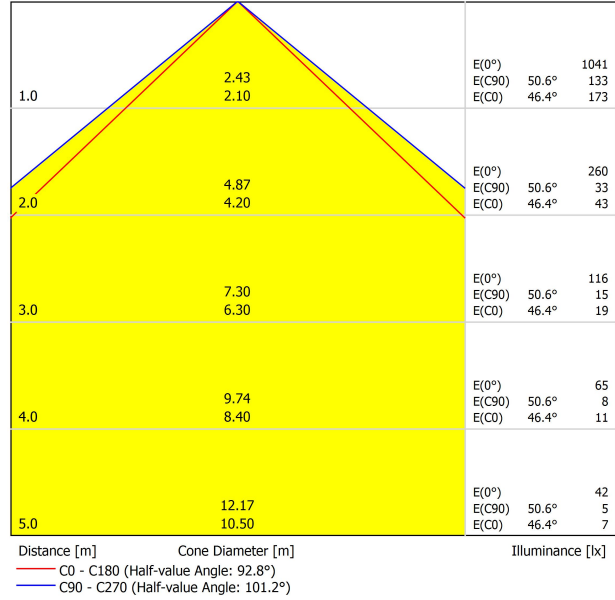

UGR

Glare Evaluation According to UGR																					
		70	70	50	30	30	70	70	50	30	30										
p Ceiling		70	70	50	30	30	70	70	50	30	30										
p Walls		50	30	50	30	30	50	30	50	30	30										
p Floor		20	20	20	20	20	20	20	20	20	20										
Room Size	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis																			
X	Y	2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H	12H								
2H	2H	22.1	23.4	22.4	23.6	23.8	22.5	23.8	22.8	24.0	24.2	23.8	25.0	24.2	25.3	25.5	24.2	25.4	24.5	25.6	25.9
2H	3H	23.8	25.0	24.2	25.3	25.5	24.2	25.4	24.5	25.6	25.9	24.8	25.9	25.1	26.2	26.5	25.2	26.3	25.6	26.6	26.9
2H	4H	24.6	25.7	24.9	26.0	26.2	24.8	25.9	25.1	26.2	26.5	25.2	26.3	25.6	26.6	26.9	25.4	26.4	25.7	26.7	27.0
2H	6H	25.2	26.2	25.6	26.5	26.8	25.2	26.3	25.6	26.6	26.9	25.5	26.5	25.8	26.8	27.1	25.4	26.4	25.7	26.7	27.0
2H	8H	25.5	26.5	25.8	26.8	27.1	25.4	26.4	25.7	26.7	27.0	25.7	26.7	26.1	27.0	27.3	25.4	26.4	25.8	26.7	27.1
2H	12H	25.7	26.7	26.1	27.0	27.3	25.4	26.4	25.8	26.7	27.1	25.4	26.4	25.8	26.7	27.1	25.4	26.4	25.8	26.7	27.1
4H	2H	22.7	23.8	23.0	24.1	24.4	23.0	24.1	23.3	24.4	24.7	23.0	24.1	23.3	24.4	24.7	24.9	25.9	25.3	26.2	26.6
4H	3H	24.7	25.6	25.1	26.0	26.3	24.9	25.9	25.3	26.2	26.6	24.9	25.9	25.3	26.2	26.6	25.7	26.6	26.1	26.9	27.3
4H	4H	25.6	26.4	26.0	26.8	27.1	25.7	26.6	26.1	26.9	27.3	25.7	26.6	26.1	26.9	27.3	26.3	27.0	26.7	27.4	27.8
4H	6H	26.4	27.1	26.8	27.5	27.9	26.3	27.0	26.7	27.4	27.8	26.5	27.2	26.9	27.6	28.0	26.5	27.2	26.9	27.6	28.0
4H	8H	26.7	27.4	27.1	27.8	28.2	26.5	27.2	26.9	27.6	28.0	26.6	27.2	27.1	27.7	28.1	26.6	27.2	27.1	27.7	28.1
4H	12H	27.1	27.7	27.5	28.1	28.5	26.6	27.2	27.1	27.7	28.1	26.6	27.2	27.1	27.7	28.1	26.6	27.2	27.1	27.7	28.1
8H	4H	25.9	26.6	26.4	27.0	27.4	26.1	26.7	26.5	27.1	27.5	26.1	26.7	26.5	27.1	27.5	26.9	27.4	27.3	27.8	28.2
8H	6H	26.9	27.4	27.3	27.9	28.3	26.8	27.4	27.3	27.8	28.2	27.1	27.6	27.6	28.0	28.5	27.1	27.6	27.6	28.0	28.5
8H	8H	27.4	27.8	27.8	28.3	28.8	27.1	27.6	27.6	28.0	28.5	27.3	27.7	27.8	28.2	28.7	27.3	27.7	27.8	28.2	28.7
8H	12H	27.8	28.2	28.3	28.7	29.2	27.3	27.7	27.8	28.2	28.7	27.3	27.7	27.8	28.2	28.7	27.3	27.7	27.8	28.2	28.7
12H	4H	26.0	26.6	26.4	27.0	27.4	26.1	26.7	26.5	27.1	27.6	26.1	26.7	26.5	27.1	27.6	26.9	27.4	27.4	27.8	28.3
12H	6H	27.0	27.5	27.5	27.9	28.4	26.9	27.4	27.4	27.8	28.3	27.2	27.7	27.7	28.1	28.6	27.2	27.7	27.7	28.1	28.6
12H	8H	27.5	27.9	28.0	28.4	28.9	27.2	27.7	27.7	28.1	28.6	27.2	27.7	27.7	28.1	28.6	27.2	27.7	27.7	28.1	28.6
Variation of the observer position for the luminaires distances S																					
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1														
S = 1.5H		+0.2 / -0.3					+0.2 / -0.3														
S = 2.0H		+0.3 / -0.7					+0.4 / -0.7														
Standard table		BK07					BK06														
Correction																					
Summand		1.3					0.9														
Corrected Glare Indices referring to 6000lm Total Luminous Flux																					

48V SYSTEM TRACK 48V




TRACK 48V TRIMLESS

TRACK 48V TRIMLESS 1m	A338-01-00-	WT	N
TRACK 48V TRIMLESS 2m	A338-02-00-	WT	N
TRACK 48V TRIMLESS 3m	A338-03-00-	WT	N
TRACK 48V TRIMLESS Corner 90° One Plane	A338-06-00-	WT	N
TRACK 48V TRIMLESS Corner 90° Two Planes	A338-07-00-	WT	N

RECOMMENDED FOR INSTALLATIONS WHERE THE PROFILE CAN BE INSTALLED BEFORE THE FALSE PLASTERBOARD CEILING (THICKNESS 12,5mm.)




TRACK 48V TRIMLESS Corner 90° One Plane




*Electrical connection not included

TRACK 48V TRIMLESS Corner 90° Two Planes



*Electrical connection not included




TRACK 48V SURFACE


TRACK 48V SURFACE 1m	A338-11-00-	WT	NT
TRACK 48V SURFACE 2m	A338-12-00-	WT	NT
TRACK 48V SURFACE 3m	A338-13-00-	WT	NT
TRACK 48V SURFACE Corner 90° One Plane	A338-14-00-	WT	NT



TRACK 48V SURFACE Corner 90° One Plane



*Electrical connection not included




TRACK 48V SURFACE SHORT

TRACK 48V SURFACE SHORT 1m	A338-21-00-	WT	NT
TRACK 48V SURFACE SHORT 2m	A338-22-00-	WT	NT
TRACK 48V SURFACE SHORT 3m	A338-23-00-	WT	NT
TRACK 48V SURFACE SHORT Corner 90° One Plane	A338-24-00-	WT	NT




TRACK 48V SURFACE SHORT Corner 90° One Plane



*Electrical connection not included

48V SYSTEM TRACK 48V

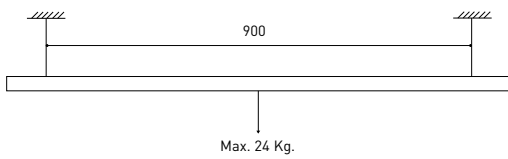


DROP VOLTAGE TABLE

POWER (W)	CABLE SECTION (mm ²)	CABLE LENGTH (m)			
		5	10	20	30
100	0,75	50	50	X	X
	1,5	50	50	40	25
150	0,75	40	15	X	X
	1,5	50	40	20	X

	P	V	D
CONSTANT VOLTAGE LED POWER SUPPLY 0434-01-61*	100W	48V	298 x 16 x 19 mm
0434-01-62	150W	48V	350 x 30 x 18 mm


220 V -
240

*To be installed inside the track.



COMPATIBILITY ACCORDING TO TYPE OF TRACK


TRACK 48V & TRACK 48V SURFACE SHORT

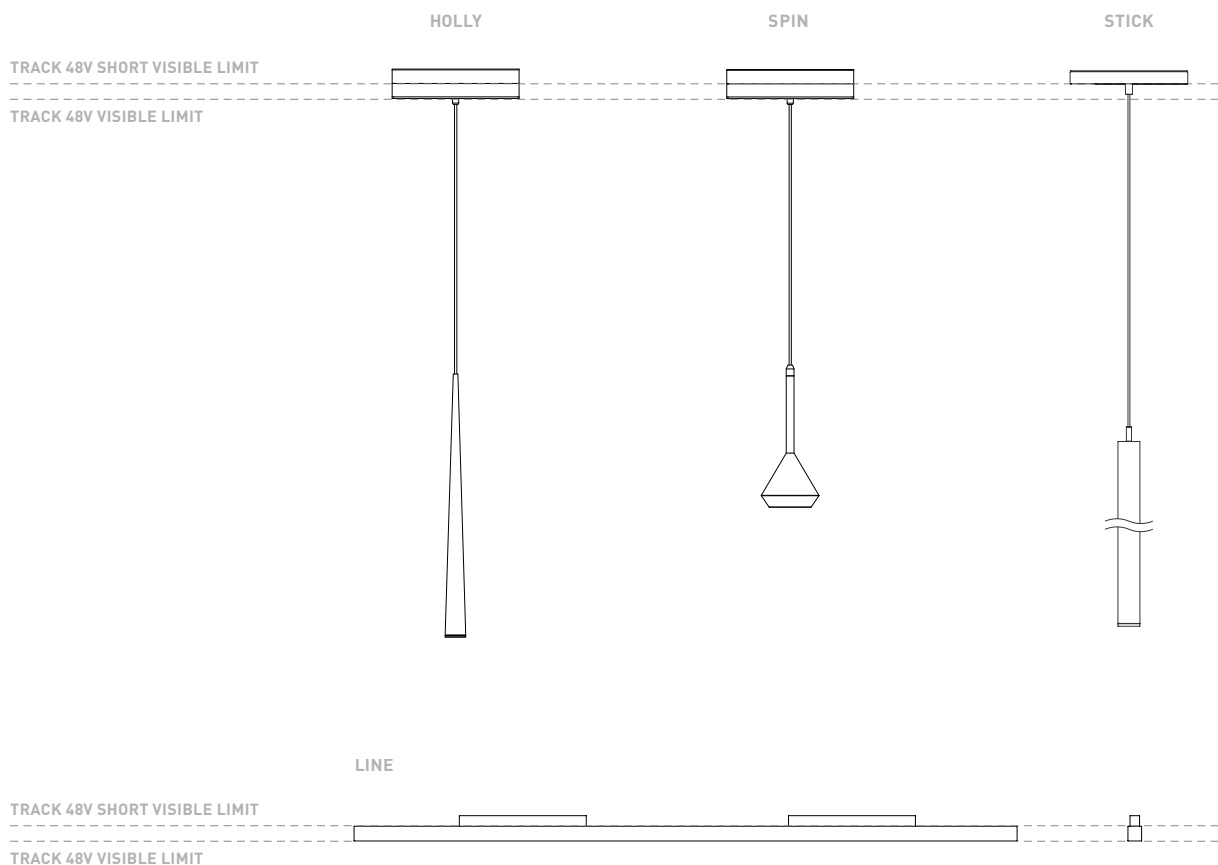

Order with *The 2019 Collection* codes. Products with one single version for both tracks


48V SYSTEM
TRACK 48V

ALL 48V TRACK




TRACK 48V Live-End Connector

A338-00-01- | W | N |



TRACK 48V Corner Connector


A338-00-12- | W | N |



TRACK 48V Corner 90° Connector One Plane


A338-00-24- | W | N |

*Not suitable for trimless version




TRACK 48V Central Connector

A338-00-02- | W | N |



TRACK 48V Wireless Control

0434-01-31- | W | N | Casambi/AAG Stucchi App



TRACK 48V Cover Gap 1m

A338-00-30- | N |

TRIMLESS 48V



TRACK 48V TRIMLESS Short T-Bracket


A338-00-03



TRACK 48V Clamp for M6 ROD

A338-00-09

*See accessories quantities



TRACK 48V TRIMLESS Long T-Bracket


A338-00-04



TRACK 48V Track Clamp

A338-00-10

*See accessories quantities



TRACK 48V TRIMLESS Straight Joiners (2 units)


A338-00-05- | WT | N |



TRACK 48V TRIMLESS Suspension Kit

A338-00-08

*See accessories quantities



TRACK 48V TRIMLESS Plaster Installation Guard 1m

A338-00-21


* SUGGESTED MOUNTING ACCESSORIES QUANTITIES

1000mm - 2 Pcs.

2000mm - 3 Pcs.

3000mm - 4 Pcs.

SURFACE, SUSPENSION , SURFACE SHORT & SUSPENSION SHORT 48V




TRACK 48V SURFACE Straight Joiner

A338-00-11

COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |


TRIMLESS, SURFACE & SUSPENSION 48V



TRACK 48V TRIMLESS & SURFACE End
A338-00-06- | WT | NT |

TRACK 48V TRIMLESS & SURFACE End Feed
A338-00-07- | WT | NT |


SURFACE & SUSPENSION SHORT 48V




TRACK 48V SURFACE SHORT End
A338-00-18- | WT | NT |


TRACK 48V SURFACE SHORT End Feed
A338-00-19- | WT | NT |




SURFACE & SURFACE SHORT 48V




TRACK 48V Power Supply Case
A338-00-29- | NT | WT | 150 W
 220 V ~ 240 V  *To be installed aside 48V Surface Tracks
 INCL





SUSPENSION & SUSPENSION SHORT 48V




TRACK 48V Wired Power Supply Case
A338-00-25- | NT | WT | 150 W  NO DIM
A338-00-26- | NT | WT | 150 W  DIM
 220 V ~ 240 V  INCL






TRACK 48V SURFACE Suspension Kit (2 units)
A338-00-15- | WT | NT |

TRACK 48V SURFACE Suspension Feed Kit
A338-00-16- | W | N |  NO DIM
A338-00-17- | W | N |  DIM
 *For remote power supply
A338-00-27- | W | N |  NO DIM
A338-00-28- | W | N |  DIM
 *For power supply inside the track

WIRE TRIMLESS ACCESSORIES



FEED
MAINS TRIMLESS*  NO DIM
A023-00-01- | W | N |
MAINS THICK TRIMLESS*  DIM
A023-00-02- | W | N |



FASTENING
STEEL CABLE TRIMLESS*
A023-00-05- | W | N |



COLOUR | N ■ RAL 9005 | W □ RAL 9016 | NT ■ RAL 9005 | WT □ RAL 9016 |

* AS MANY PIECES AS NEEDED ACCORDING TO YOUR PRODUCT



Fuente de luz (LED) reemplazable por un profesional autorizado

Replaceable (LED only) light source by an authorized professional.

Source lumineuse (LED) remplaçable par un professionnel agréé

Sorgente luminosa (LED) sostituibile da parte di un professionista autorizzato

Austauschbare (LED) Lichtquelle durch einen autorisierten Fachmann



Equipo de control reemplazable por un profesional autorizado

Replaceable control gear by an authorized professional

Dispositif de commande remplaçable par un professionnel agréé

Alimentatore sostituibile da parte di un professionista autorizzato

Auswechselbares Betriebsgerät durch autorisierten Fachmann

INSTRUCCIONES PARA EL FINAL DE VIDA Y LA ELIMINACIÓN LOS COMPONENTES
 INSTRUCTIONS ON END-OF-LIFE AND COMPONENT DISPOSAL
 INSTRUCTIONS POUR LA GESTION DES COMPOSANTS EN FIN DE VIE ET LEUR MISE AU REBUT
 ISTRUZIONI PER IL FINE VITA E LO SMALTIMENTO DEI COMPONENTI
 ANWEISUNGEN ZUR ENTSORGUNG DER LEUCHTENKOMPONENTEN



Interrumpir la alimentación del aparato
 Cut the power supply to the luminaire
 Couper l'alimentation du luminaire
 Interrompere l'alimentazione dell'apparecchio
 Stromversorgung der Leuchte unterbrechen



Quitar la(s) fuente(s) de luz para el desecho
 Remove light source(s) for disposal
 Retirer la (les) source(s) lumineuse(s) pour l'élimination
 Rimuovere la/le sorgente/e di luce per lo smaltimento
 Lichtquelle(n) zur Entsorgung entfernen



Quitar la batería para el desecho
 Remove the battery for decommissioning
 Retirer la batterie pour sa mise au rebut
 Rimuovere la batteria per la dismissione
 Die Batterie ordnungsgemäß entsorgen



Quitar el equipo de control para el desecho
 Remove control gear for disposal
 Retirer le dispositif de commande pour l'élimination
 Rimuovere l'alimentatore per lo smaltimento
 Betriebsgerät zur Entsorgung ausbauen



Enviar los materiales a un centro de recogida RAEE
 Send the materials to a WEEE collection centre
 Envoyer les matériaux dans une déchetterie DEEE
 Inviare i materiali ad un centro di raccolta RAEE
 Die Materialien in einem WEEE-Zentrum entsorgen

