

GX2098U ROTARY CAM SWITCH GX SERIES, AMMETER SWITCH 20A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM

Product designation			Rotary cam
Product type designation			switches GX20
General characteristics			GA20
Switching diagram			98 - Ammeter switch
N° of elements			3
Mounting form			U - Front mounting with black handle
Contact characteristics			
Rated insulation voltage Ui			
	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage Uimp		kV	6
Conventional free air thermal current Ith			
	IEC/EN	A	20
Potod operational voltage	UL/CSA	A V	15 440
Rated operational voltage Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection In (gG)		κv	4
Maximum ruse size for short-circuit protection in (gO)	10kA	А	20
	15kA	A	20
	25kA	A	20
Rated short time current Icw			
	1s	А	250
Conductivity			10/5 mA/V
Operational current le IEC/EN			
AC1/AC21A			
		Α	20
AC15			
	110V	A	10
	220/230V	A	8
	380/400V	A	6
Poted operational power in AC	660/690V	A	1.5
Rated operational power in AC Three-phase AC-3			
THEE-phase AC-3	220/230V	kW	3.7
	380/440V	kW	5.5
	500/690V	kW	5.5
Single-phase AC-3			
	110V	kW	0.75
	220/230V	kW	1.8
	380/440V	kW	3
Three-phase AC23A			
	220/230V	kW	4
	380/440V	kW	7.5
	500/690V	kW	7.5
Single-phase AC23A	1101	1.1.4.7	0.75
	110V	kW	0.75
	220/230V 380/440V	kW kW	2.2 3.5
Rated operational current in DC	300/44UV	L A A	5.5

Rated operational current in DC

GX2098U

ova electric ENERGY AND AUTOMATION

GX2098U ROTARY CAM SWITCH GX SERIES, AMMETER SWITCH 20A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM

	DC21A				
	50211	48V	А	20	
		60V	A	20	
		110V	A	4	
		220V	A	0.6	
		440V	A	0.25	
	DC23A (poles in series)	101	73	0.20	
		24V	А	20 (1)	
		48V	A	20 (2)	
		40V 60V	A	20 (2)	
		110V	A	10 (3)	
		220V	A		
	DC13	2200	A	8 (4)	
	DC13	24V	^	20	
			A	20	
		48V	A	16	
		60V	A	12	
		110V	Α	1	
		220V	A	0.4	
		440V	A	0.15	
Power dissipation			W	0.6	
Mechanical features					
Terminals screw				M3	
Tightening torque for te	erminals max		Nm	0.8	
Conductor size					
	AWG - Rigid cable				
		min	AWG	20	
		Max	AWG	12	
	AWG - Flexible cable				
		min	AWG	20	
		Max	AWG	12	
	Conductor size (IEC) - Flexible cable				
		min	mm²	0.5	
		Max	mm²	2.5	
	Conductor size (IEC) - Rigid cable				
		min	mm²	0.5	
		Max	mm²	2.5	
Mechanical life			cycles	1X10 ⁶	
UL technical data			0)0.00		
Motor power for direct	-on-line control				
	for three-phase motor				
		120V	HP	1.5	
		240V	HP	3	
		480V	HP	5	
		400V 600V	HP	5	
	for single phase motor	000 v	ΠF	5	
	for single-phase motor	4001/		0.75	
		120V	HP	0.75	
Ambiant conditions		240V	HP	1.5	
Ambient conditions					
Temperature					
	Operating temperature		0.0	05	
		min	°C	-25	
		max	°C	+55	
	Storage temperature				
		min	°C	-40	
The character	istics described in this document are subject to updates or modifications at any	time. The description	s, technical a	and	


GX2098U


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding



GX2098U ROTARY CAM SWITCH GX SERIES, AMMETER SWITCH 20A, FOR FRONT MOUNTING WITH BLACK HANDLE, FRONT PLATE 48X48MM








Drillings for 4 screws fixing (4V version).

Series			D	imensio	าร							LI	Number	of eler	ments				
Selles	□A	С	ØD1	ØD2	E	□K	۵N	1	2	3	4	5	6	7	8	9	10	11	12
GX16	48	39.5	12	5	26.5	36	6	43	51.5	60	68.5	77	85.5	94	102.5	111	119.5	128	136.5
GX20	48	39.5	12	5	26.5	36	6	43	51.5	60	68.5	77	85.5	94	102.5	111	119.5	128	136.5
GX32	65	53	14	5	34.5	48	7	51	63	75	85	99	111	123	135	147	159	171	183
GX40	65	53	14	5	34.5	48	7	51	63	75	85	99	111	123	135	147	159	171	183

R

S

Wiring diagrams

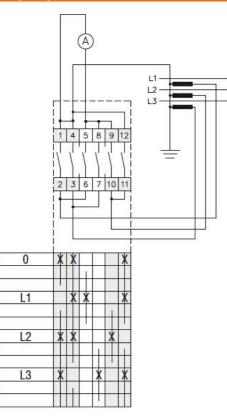

Certifications and compliance

Compliance

CSA C22.2 n° 14	
IEC/EN/BS 60947-1	
IEC/EN/BS 60947-3	
IEC/EN/BS 60947-5-1	
IEC/EN/BS 61058-1	
UL60947-4-1	



ENERGY AND AUTOMATION

Certificates		
	cULus	
	EAC	
ETIM classifica	tion	
		EC001029 -
ETIM 8.0		Selector switch,

Selector switch, complete