

COMPACT™ PENDANT ARM SERIES 4 SYSTEM 80, TYPE 12

INDUSTRY STANDARDS

NEMA/EEMAC Type 12
IEC 60529, IP55
DIN 40050

APPLICATION

A heavier version of the Series 2 Pendant Arm, the COMPACT™ Series 4 System 80 Pendant Arms are equally flexible in allowing operators to move controls into and out of position, but they can accommodate heavier weight loads. At 3.3 ft. (1 m), the Series 4 System 80 holds 337 lb. (153.2 kg).


System 80 is recommended for use with CONCEPT HMI and PROLINE™ Sloped Front Enclosures.

SPECIFICATIONS

- Heavy cast steel and cast aluminum couplings and heavy-wall steel tubing provide excellent structural strength
- Each system includes multiple coupling types and three standard tube lengths (.5 m, 1 m and 2 m) which combine to form numerous configurations
- Steel tubing has 5-mm (0.2-inch) wall thickness. Tubing is cold-formed, welded square and rectangular steel tubes.
- Tubing provides structural integrity and acts as a conduit for equipment wiring
- Removable access plates (provided with set-up joint, elbow and elbow couplings) simplify cable installation inside tubing
- Heavy-duty bearings in all movable joints for convenient, smooth operation and enhanced durability to withstand stresses of repeated use
- Deep tube fittings in all couplings
- Adjustable setscrews allow for accurate alignment of supporting tubes
- Optional pedestal base available
- Gasket is oil-resistant neoprene

FINISH

Couplings are RAL 7035 light-gray polyester powder paint. Access plates and tubing are light-gray. Bellows are black.

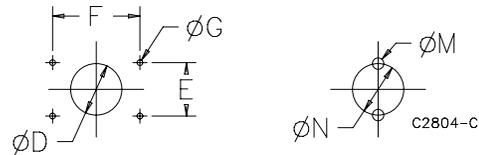Standard Cutouts for Mounting

Standard Coupling or Standard Elbow Coupling

System	Dia. M (mm)	Dia. M (in.)	Dia. N (mm)	Dia. N (in.)
50	8	0.33	51	2.01



Dimensions for Cutouts

System	50 (mm)	50 (in.)	60 (mm)	60 (in.)	80 (mm)	80 (in.)
Set-Up Joint						
Ø D MAX	70	2.75	70	2.75	105	4.13
E	88	3.47	97	3.82	122	4.82
F	88	3.47	97	3.82	122	4.82
Ø G	11	0.43	11	0.43	13	0.51
Wall Joint or Cable Wall Joint						
Ø D MAX	50	1.97	60	2.36	80	3.15
E	50	1.97	60	2.36	80	3.15
F	107	4.21	115	4.53	138	5.43
Ø G	10	0.41	10	0.41	13	0.51
Wall Flange or Base Bracket						
Ø D MAX	70	2.75	70	2.75	105	4.13
E	88	3.47	93	3.66	122	4.80
F	88	3.47	93	3.66	122	4.80
Ø G	11	0.43	11	0.43	13	0.51
Flange Coupling or Flange Elbow Coupling						
Ø D MAX	51	2.01	65	2.56	91	3.58
E	60	2.36	60	2.36	80	3.15
F	60	2.36	60	2.36	80	3.15
Ø G	7	0.26	7	0.26	7	0.26
Angle Adapter Plate						
Ø D MAX	51	2.01	65	2.56	91	3.58
E	80	3.15	80	3.15	80	3.15
F	120	4.72	120	4.72	120	4.72
Ø G	7	0.26	7	0.26	7	0.26


SYSTEM LOAD CAPACITY

The Series 4 Pendant Arm load graph is the result of load capacity tests. Please contact Hoffman for specific application information.

Load Diagram

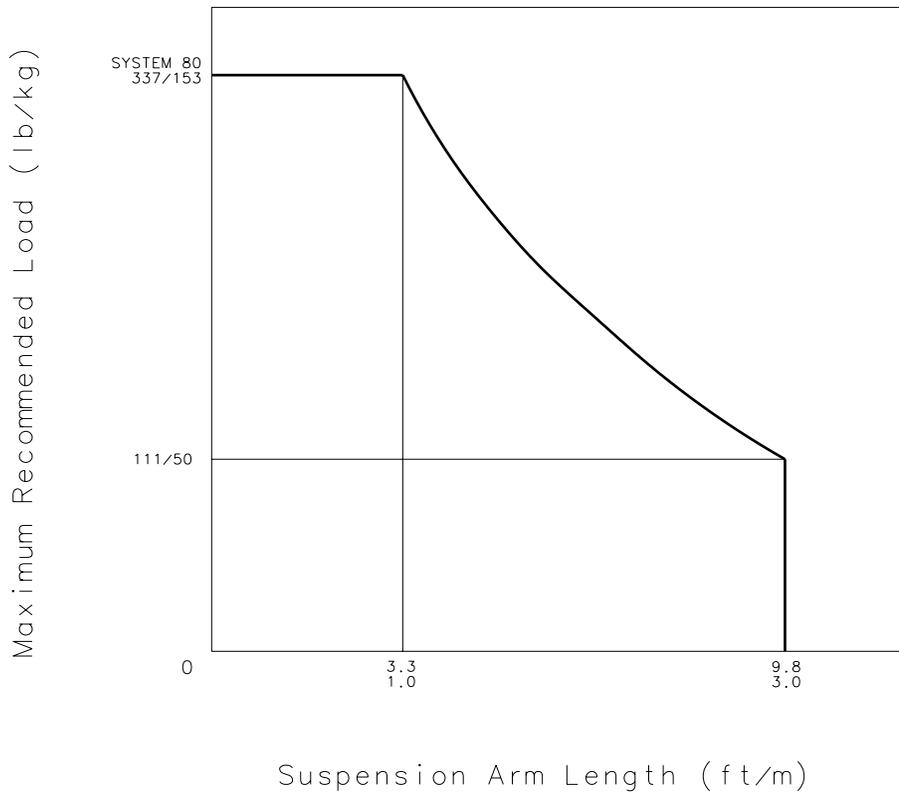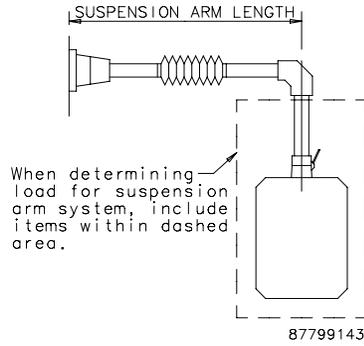


89001155

TUBES


Square and rectangular tubes are cold-formed, hollow, welded steel with 5-mm wall thickness. Finish is RAL 7035 light-gray polyester powder paint.


Tubing provides structural integrity and acts as a conduit for equipment wiring. Available in 500-, 1000- and 2000-mm lengths. All pendant arm connections are sized to fit appropriate tube sizes.

BULLETIN: CS4




87799136

Catalog Number	System	Size mm/in.	Actual Length mm/in.	Weight (lb.)	External Dimensions mm/in.	Wall Thickness Dimensions mm/in.	Inside Cross Section (sq. cm)	Inside Cross Section (sq. in.)
CCS8T5	80	80 x 80 3.10 x 3.10	489 19.25	13.0	80 sq. 3.15	5 0.20	49	7.60
CCS8T10	80	80 x 80 3.10 x 3.10	991 39.00	24.5	80 sq. 3.15	5 0.20	49	7.60
CCS8T20	80	80 x 80 3.10 x 3.10	1988 78.25	49.0	80 sq. 3.15	5 0.20	49	7.60

SET-UP JOINT


Cast iron finished with RAL 7035 light-gray polyester powder paint. Mounts equipment to horizontal surface. Permits pendant arm to be rotated or turned 306 degrees. Pivot bearing is maintenance-free. Setscrews, removable access plate and gasket are included. Mounting hardware is not provided.

BULLETIN: CS4

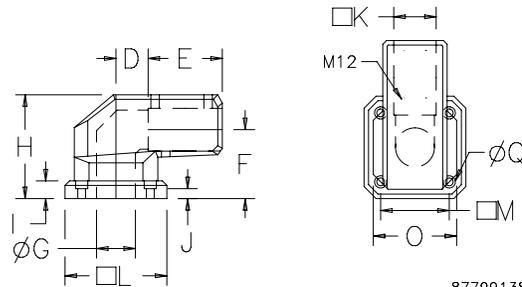

Side View

Top View

87799138


Catalog Number	System	L each side mm/in.	H mm/in.	D mm/in.	E mm/in.	F mm/in.	Dia. G mm/in.	I mm/in.	J mm/in.	K each side mm/in.	M each side mm/in.	O mm/in.	Dia. Q mm/in.	Weight (lb.)
CCS8SJLG	80	174 6.85	162 6.38	56 2.19	120 4.72	107 4.21	75 2.95	25 0.98	12 0.47	80 3.15	122 4.80	152 5.98	13 0.51	45.5

WALL JOINT



Welded steel plate construction finished with RAL 7035 light-gray polyester powder paint. Mounts equipment to vertical surface. Swivel range is approximately 180 degrees. Includes bellows with zipper, seals and setscrews. Adjustable tension at pivot point. Rotational limiter is optional. Mounting hardware not provided.

BULLETIN: CS4

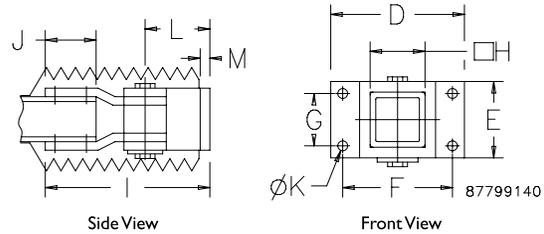


Catalog Number	System	D mm/in.	E mm/in.	F mm/in.	G mm/in.	H each side mm/in.	I mm/in.	J mm/in.	Dia. K mm/in.	L mm/in.	M mm/in.	Weight (lb.)
CCS8WJRLG	80	161 6.34	104 4.09	138 5.43	80 3.15	80 3.15	300 11.81	100 3.94	13 0.51	135 5.31	10 0.39	21.6

CABLE WALL JOINT



Welded steel plate construction finished with RAL 7035 light-gray polyester powder paint. Mounts equipment to vertical surface. Provides cable access to inside of pendant system from above or below. Swivel range approximately 180 degrees. Includes bellows with zipper, seal and setscrews. Adjustable tension at pivot point. Rotation limiter is optional. Mounting hardware not provided.

BULLETIN: CS4

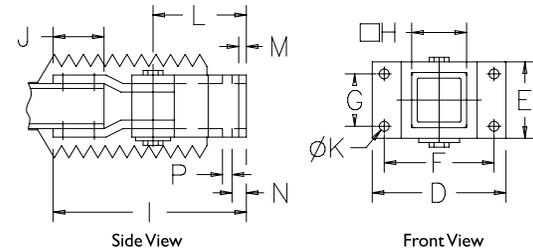

C2753-C


Catalog Number	System	D mm/in.	E mm/in.	F mm/in.	G mm/in.	H each side mm/in.	I mm/in.	J mm/in.	Dia. K mm/in.	L mm/in.	M mm/in.	N mm/in.	P mm/in.	Weight (lb.)
CCS8WJRLG	80	165 6.50	104 4.09	138 5.43	80 3.15	80 3.15	330 12.99	100 3.94	13 0.51	165 6.50	10 0.39	20 0.79	60 2.36	20.9

WALL FLANGE



Wall Flange expands mounting options to include wall-mount as well as horizontal tube applications. Cast iron construction finished with RAL 7035 light-gray polyester powder paint. Setscrews, gasket and seals are included. Mounting hardware not provided.

BULLETIN: CS4

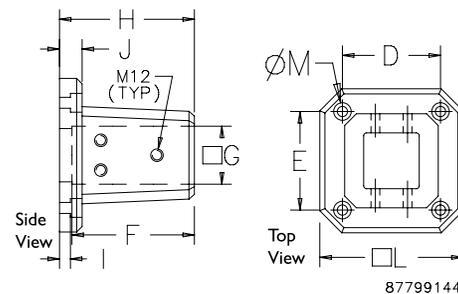

87799144


Catalog Number	System	L each side mm/in.	H mm/in.	D mm/in.	E mm/in.	F mm/in.	G each side mm/in.	I mm/in.	J mm/in.	Dia. M mm/in.	Weight (lb.)
CCS8WFLG	80	174 6.85	160 6.30	122 4.80	122 4.80	143 5.63	80 3.15	12 0.47	25 0.98	13 0.51	20.1

INTERMEDIATE JOINT



Welded steel plate construction finished with RAL 7035 light-gray polyester powder paint. Mounts to pendant tube. Swivel range is approximately 180 degrees. Setscrews and bellows with zipper are included. Rotational limiter is optional.

BULLETIN: CS4

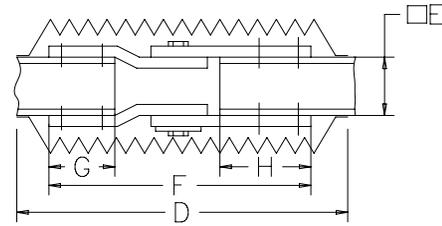

87799146


Catalog Number	System	D mm/in.	E each side mm/in.	F mm/in.	G mm/in.	H mm/in.	Weight (lb.)
CCS81JRLG	80	400 15.75	80 3.15	330 12.99	100 3.94	100 3.94	21.4
CCS141JRLG	80/140	540 21.26	80 x 140 3.15 x 5.51	460 18.11	155 6.10	155 6.10	39.9

ELBOW



Cast aluminum with RAL 7035 light-gray polyester powder paint finish. Removable access plate. Setscrews and gaskets are included.

BULLETIN: CS4

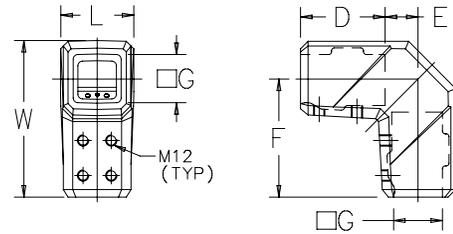

87799402


Catalog Number	System	L mm/in.	W mm/in.	D mm/in.	E mm/in.	F mm/in.	G each side mm/in.	Weight (lb.)
CCS8ELLG	80	108 4.25	225 8.86	120 4.72	50 1.97	170 6.69	80 3.15	18.7

FLANGE COUPLING



Flange Coupling mounts to enclosure, enabling enclosure to be rotated 300 degrees. Enclosure can be locked in position. Safety stop and maintenance-free bearing. Finish is RAL 7035 light-gray polyester powder paint. Includes installation instructions, setscrews, gaskets and mounting hardware.

BULLETIN: CS4




Catalog Number	System	L each side mm/in.	H mm/in.	D each side mm/in.	E mm/in.	Dia. F mm/in.	G each side mm/in.	Weight (lb.)
CCS8FCLG	80	120 4.72	110 4.33	80 3.15	53 2.09	91 3.58	80 3.15	7.2

FLANGE ELBOW COUPLING



Coupling mounts to enclosure, enabling enclosure to be rotated 300 degrees. Enclosure can be locked in position. Removable access plates. Finish is RAL 7035 light-gray polyester powder paint. Setscrew, gasket and mounting hardware are included.

BULLETIN: CS4

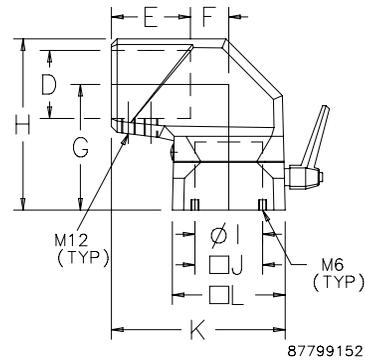

Catalog Number	System	L each side mm/in.	H mm/in.	D each side mm/in.	E mm/in.	F mm/in.	G mm/in.	Dia. I mm/in.	J each side mm/in.	K mm/in.	Weight (lb.)
CCS8FECLG	80	120 4.72	173 6.81	80 3.15	90 3.54	54 2.13	121 4.76	91 3.58	80 3.15	204 8.03	9.5


ROTATION LIMITER



Accessory for use with Wall Joint, Cable Wall Joint and Intermediate Joint. Limits the rotation of these joints which normally rotate 180 degrees. Rotation Limiter provides stops in 15-degree increments. The limiter is a heavy-duty steel disk that attaches to the pivot point on each joint. Moveable stop pins provide adjustment.

BULLETIN: CS4

Catalog Number	System	Dia. J (mm)	Dia. J (in.)	Weight (lb.)
CCS814RL	80	119	4.70	1.3



SWIVEL TILT




Mounts between suspension arm and HMI enclosure to provide both swivel and tilt options for machine operator. Cast aluminum assembly finished with RAL 7035 light-gray polyester powder paint. Center opening for control cables. Tilt knob allows infinite tilt adjustment from horizontal to 30 degrees. Swivel allows 300-degree maximum rotation. Setscrews, seals and enclosure mounting screws are included.

Maximum load for overhead applications is 110 lb. (50 kg).

BULLETIN: CS4

Catalog Number	System	G (mm) each side	G (in.) each side	Weight (lb.)
CCS8STBLG	80	80	3.15	7.0

Not recommended to be used in combination with base with cutout for sloped-front PBSK66 or PBSK66SS.

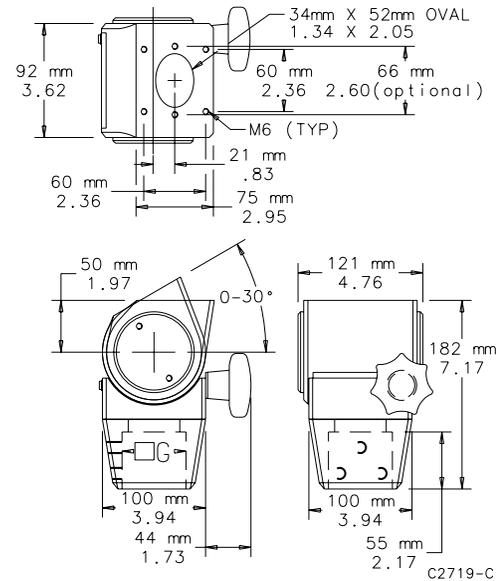


ANGLE ADAPTER PLATE



Cast aluminum finished with RAL 7035 light-gray polyester powder paint. Provides connection between enclosure and flange coupling. Includes gasket and installation hardware.

BULLETIN: CS4

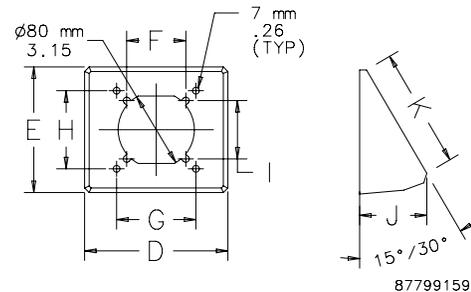

Catalog Number	System	Angle	D mm/in.	E mm/in.	F mm/in.	G mm/in.	H mm/in.	I mm/in.	J mm/in.	K mm/in.	Weight (lb.)
CCS568AA15LG	50, 60, 80	15°	148 5.83	127 5.00	60 2.36	80 3.15	80 3.15	60 2.36	39 1.54	118 4.65	1.0
CCS568AA30LG	50, 60, 80	30°	148 5.83	127 5.00	60 2.36	80 3.15	80 3.15	60 2.36	66 2.66	120 4.72	1.3


For CCS14AA15LG, system 80/140, 15-degree angle, 3.6 lb., see Angle Adapter Plate System 80/140 dimension drawing for dimension information.

BASE BRACKET



For vertical-tube mounting or to mount tube to floor. Bracket is cast iron finished with RAL 7035 light-gray polyester powder paint. Setscrews, gasket and seals are included. Mounting hardware not provided.

BULLETIN: CS4

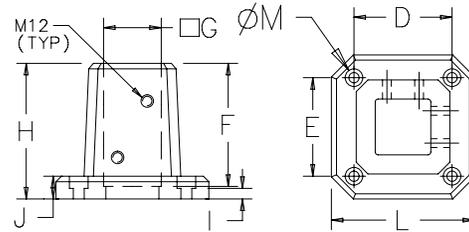

87799161

Catalog Number	System	L each side mm/in.	H mm/in.	D mm/in.	E mm/in.	F mm/in.	G each side mm/in.	I mm/in.	J mm/in.	Dia. M mm/in.	Weight (lb.)
CCS8BBLG	80	174 6.85	160 6.30	122 4.80	122 4.80	143 5.63	80 3.15	12 0.47	25 0.98	13 0.51	20.4
CCS14BBLG	80/140	175 x 235 6.89 x 9.25	190 7.48	125 4.92	185 7.28	173 6.81	80 x 140 3.15 x 5.51	12 0.47	25 0.98	13 0.51	28.4


PEDESTAL BASE



Cast aluminum one-piece heavy-duty construction with RAL 7035 light-gray polyester powder paint finish. Includes all hardware for attaching tubes. Optional casters or levelers can be installed on pedestal base. Levelers and fixed or swivel casters are available in pairs (must order two pair).

BULLETIN: CS4

Catalog Number	System	D (mm) each side	D (in.) each side	Weight (lb.)
CCS8PBLG	80	80 x 80	3.15 x 3.15	31.5
CCS14PBLG	80/140	80 x 140	3.15 x 5.51	32.6

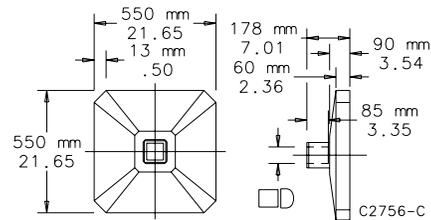

CASTERS AND LEVELERS FOR PEDESTAL BASE




Casters or levelers can be installed under the cast aluminum pedestal base. Casters raise pedestal base 0.59 in. (15 mm). Four casters and four levelers or two casters and two levelers can be installed.

BULLETIN: CS4

Catalog Number	Description	Qty	Weight (lb.)
CCSPBWF	Fixed Casters	2	0.3
CCSPBWS	Swivel Casters	2	0.5



COMPACT™ PENDANT ARM SERIES 4 CONFIGURATIONS



87799186

A



Description	Qty.	Catalog Number
Set-up joint	1	CCS8SJLG
Elbow	1	CCS8ELLG
Flange coupling or Swivel tilt	1	CCS8FCLG
	1	CCS8STBLG



87799187

B AND C


Description	Qty.	Catalog Number
Wall joint or Cable wall joint	1	CCS8WJRLG
	1	CCS8WJCRLG
Elbow	1	CCS8ELLG
Flange coupling or Swivel tilt	1	CCS8FCLG
	1	CCS8STBLG



87799189

D AND E


Description	Qty.	Catalog Number
Wall flange	1	CCS8WFLG
Elbow	1	CCS8ELLG
Flange coupling or Swivel tilt	1	CCS8FCLG
	1	CCS8STBLG




87799190

F

Description	Qty.	Catalog Number
Set-up joint	1	CCS8SJLG
Flange elbow coupling	1	CCS8FECLG



G




H


87799191

G AND H

Description	Qty.	Catalog Number
Wall joint or Cable wall joint	1	CCS8WJRLG CCS8WJCRLG
Flange elbow coupling	1	CCS8FECLG



I



I

87799193


I

Description	Qty.	Catalog Number
Wall joint or Cable wall joint	1	CCS8WJRLG CCS8WJCRLG
Elbow	1	CCS8ELLG
Swivel tilt ^a	1	CCS8STBLG

^aMaximum load for overhead applications is 110 lb. (50 kg) including enclosure.

Note to the Specifier:



1. Select pendant system sizing using the COMPACT Series 4 load capacity chart.
2. Tube catalog numbers are not included in configuration tables.



87799194

J

Description	Qty.	Catalog Number
Set-up joint	1	CCS8SJLG
Intermediate joint	1	CCS8IJRLG
Elbow	1	CCS8ELLG
Flange coupling or Swivel tilt	1	CCS8FCLG
	1	CCS8STBLG




87799195

K AND L

Description	Qty.	Catalog Number
Wall joint or Cable wall joint	1	CCS8WJRLG
	1	CCS8WJCRLG
Intermediate joint	1	CCS8IJRLG
Elbow	1	CCS8ELLG
Flange coupling or Swivel tilt ^a	1	CCS8FCLG
	1	CCS8STBLG


^aMaximum load for overhead applications is 110 lb. (50 kg) including enclosure.



87799197

M


Description	Qty.	Catalog Number
Wall flange	1	CCS8WFLG
Elbow	1	CCS8ELLG
Flange coupling	1	CCS8FCLG



87799198

N



Description	Qty.	Catalog Number
Base bracket	1	CCS8BBLG
Flange coupling	1	CCS8FCLG
Angle adapter 15° or Angle adapter 30°	1	CCS568AA15LG CCS568AA30LG



87799199

O

Description	Qty.	Catalog Number
Set-up joint	1	CCS8SJLG
Intermediate joint	1	CCS8IJRLG
Flange elbow coupling	1	CCS8FECLG



87799200

P AND Q

Description	Qty.	Catalog Number
Wall joint or Cable wall joint	1	CCS8WJRLG CCS8WJCRLG
Intermediate joint	1	CCS8IJRLG
Flange elbow coupling	1	CCS8FECLG

Note to the Specifier:

1. Select pendant system sizing using the COMPACT Series 4 load capacity chart.
2. Tube catalog numbers are not included in configuration tables.