



Product designation

Product type designation

Assembled industrial relays  
HR604C

**Contact characteristics**

Contact configuration			4 C/O
Rated insulation voltage $U_i$ IEC/EN	V		500
Rated impulse withstand voltage $U_{imp}$	kV		4
IEC Conventional free air thermal current $I_{th}$	A		5
Rated current ( $I_n$ )	A		5
Relay control voltage	V		230VAC
Max contrrollable power in		AC-1	W 5
Rated operating power AC-1			VA 1250
Rated operating power AC-15		230 VAC	VA 150
Single-phase motor control		230VAC	kW 0.37
Rated operating current DC-1		30V	A 8
		110V	A 0.3
		220V	A 0.1
Minimum switching load		V / mA	5 / 100
Contact impedance		m $\Omega$	100
Contact material			Ag/Ni

**Operating times**

Closing		ms	<25
Opening		ms	<25

**Operations**

Mechanical life		cycles	20000000
Electrical life AC1		cycles	100000

**Coil characteristics**

Average coil consumption AC at 20°C		VA	1.7
Average coil consumption DC at 20°C		W	1.1

Operating range

Closing	% $U_n$	70...110
Opening	% $U_n$	20...55

Maximum cycle frequency		cycles/h	3600
-------------------------	--	----------	------

**Mechanical features**

Max socket terminal tightening torque		Nm	0.6
Socket screw tightening tool (cross / flat blade)			PH1 / 4.5mm

Conductor section

AWG/Kcmil

min	20
max	14

IEC

min	mm <sup>2</sup>	0.5
max	mm <sup>2</sup>	2.5

Operating position

normal	Any
--------	-----

Fixing

On 35mm DIN rail and with screw

**Ambient conditions**

Temperature

Operating temperature

min	°C	-40
max	°C	+70

Storage temperature

min	°C	-40
max	°C	+80

**Other features**

Indication

Yes

Mechanical contact position indicator


Yes

Mechanical test actuator


Yes

**Dimensions**


**HR60 2C... with socket HR6XS21 - HR6XS22**

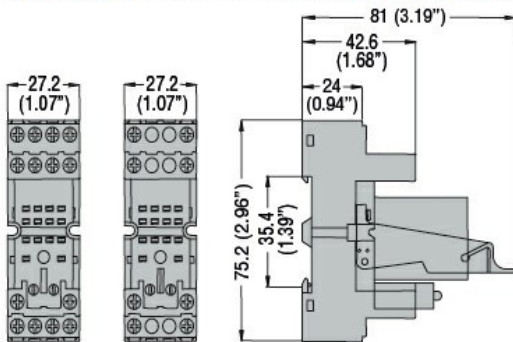



**HR60 4C... with socket HR6XS41 - HR6XS42**

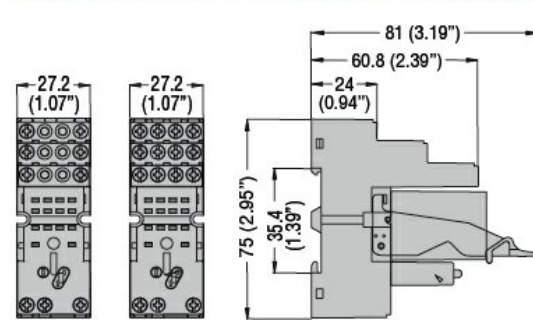

**HR60 2C... - HR60 4C... with socket HR6XS21S - HR6XS41S**

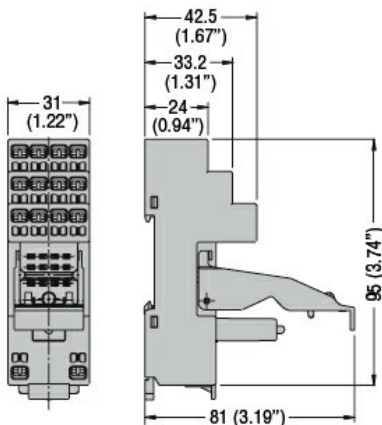

**Wiring diagrams**

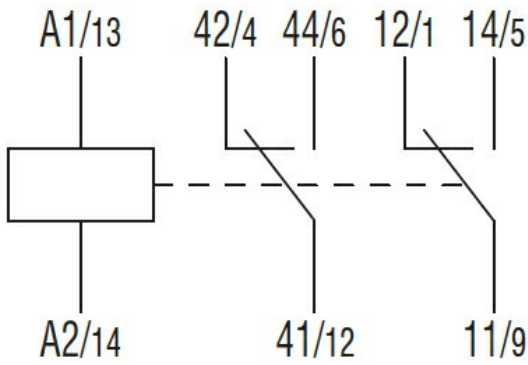

**Certifications and compliance**

Compliance

IEC/EN 61810

**ETIM classification**

ETIM 8.0

EC001437 -  
Switching relay