


PRODUCT-DETAILS

MS116-32-HKF1-11

MS116-32-HKF1-11 Manual Motor Starter 25 ... 32 A

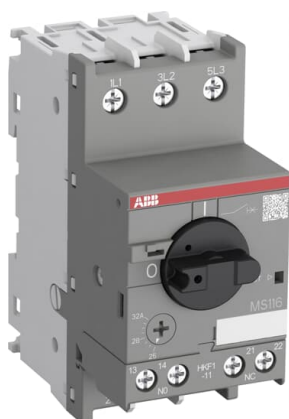

Informations générales

Extension du type de produit	MS116-32-HKF1-11
Code de produit	1SAM250005R1015
EAN	4013614405648
Description courte	MS116-32-HKF1-11 Manual Motor Starter 25 ... 32 A

Description longue	<p>The MS116-32-HKF1-11 manual motor starter (also known as motor protection circuit breaker or manual motor protector) is a compact 45 mm width device with a rated operational current of $I_e = 32.0$ A and a pre-assembled front mounted auxiliary contact HKF1-11. This device is used to manually switch on and off motors and to protect them reliably and without the need for a fuse from short-circuits, overload and phase failures. The manual motor starter offers a rated service short-circuit breaking capacity $I_{cs} = 10$ kA at 400 VAC and trip class 10A. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single-phase applications. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, 3-phase bus bars, power in-feed blocks and locking devices for protection against unauthorized changes are available as accessory.</p>
--------------------	---

Commande

Quantité minimum	1 pièce
Code douanier	85362010

Downloads Préférés

Fiche produit, informations techniques	2CDC131025D0201
Data Sheet, Technical Information (Part 3)	1SAM200507F0001 1SAM200507F0002 1SAM200507F0003 1SAM200508F0001 1SAM200508F0002 1SAM200508F0003
Instructions et manuels	2CDC131011M6802
Instructions et manuels (Partie 2)	2CDC131060M0202
Time-Current Characteristic Curve	1SAM200505F0015
CAD Dimensional Drawing	2CDC001079B0201
Schéma dimensionnel	1SAM200420F0001

Dimensions

Produit Largeur Net	45 mm
Produit Hauteur Net	97.8 mm
Produit Longueur Net	85.4 mm
Poids net	0.326 kg

Technique

Pouvoir assigné de coupure de service en court-circuit (I_{cs})	(230 V AC) 10 kA (400 V AC) 10 kA (440 V AC) 3 kA (500 V AC) 3 kA (690 V AC) 2 kA
Pouvoir assigné de coupure ultime en court-circuit (I_{cu})	(230 V AC) 16 kA (400 V AC) 16 kA (440 V AC) 15 kA (500 V AC) 10 kA (690 V AC) 3 kA
Courant assigné instantané de réglage de court-circuit (I_i)	480 A
Setting Range	25 ... 32 A
Puissance assignée d'emploi AC-3 (P_e)	(400 V) Three Phase 15 kW
Puissance assignée d'emploi AC-3e (P_e)	(400 V) Three Phase 15 kW
Tension	Circuit principal 690 V AC
Courant nominal de fonctionnement (I_n)	32 A
Courant assignée d'emploi AC-3 (I_n)	32 A
Courant assignée d'emploi AC-3e (I_n)	32 A
Fréquence assignée (f)	Circuit principal 50 Hz

	Circuit principal 60 Hz
Tension assignée de tenue aux chocs (U_{imp})	Circuit principal 6 kV
Tension assignée d'isolement (U_i)	690 V
Power Loss	at Rated Operating Conditions per Pole 1.9 ... 3.1 W
Nombre de pôles	3
Mounted Auxiliary Contacts	1 NO, 1 NC
Courant thermique conventionnel à l'air libre (I_{th})	Main Circuit 32 A
Indice de protection	Housing IP20 Main Circuit Terminals IP10
Degré de pollution	3
Electrical Durability	50000 cycle
Durabilité mécanique	100000 cycle
Type de borne	Screw Terminals
Connecting Capacity Main Circuit	Flexible with Ferrule 1/2x 0.75 ... 6 mm ² Flexible with Insulated Ferrule 1/2x 0.75 ... 6 mm ² Flexible 1/2x 1 ... 2.5 mm ² Flexible 1/2x 2.5 ... 6 mm ² Rigid 1/2x 1 ... 2.5 mm ² Rigid 1/2x 2.5 ... 6 mm ²
Connecting Capacity Auxiliary Circuit	Flexible with Ferrule 1/2x 0.75 ... 1.5 mm ² Flexible with Insulated Ferrule 1/2x 0.75 ... 1.5 mm ² Flexible 1/2x 0.75 ... 1.5 mm ² Rigid 1/2x 1 ... 1.5 mm ²
Couple de serrage	Auxiliary Circuit 0.8 ... 1.2 N·m Main Circuit 2 N·m
Wire Stripping Length	Auxiliary Circuit 8 mm Main Circuit 10 mm
Recommended Screw Driver	Pozidriv 2
Type d'encastrement	1 ... 6
Montage sur rail DIN	TH35-15 (35 x 15 mm Mounting Rail) acc. to IEC 60715 TH35-7.5 (35 x 7.5 mm Mounting Rail) acc. to IEC 60715
Minimum Mounting Distance	Electrical Conductive Board, Horizontal - Up to 400 V 0 mm Electrical Conductive Board, Horizontal - Up to 690 V 1.5 mm Electrical Conductive Board, Vertical 75 mm Other Device Same Type, Horizontal 0 mm Other Device Same Type, Vertical 150 mm
Actuator Type	Rotary Handle
Contact Position Indication	ON / OFF
Normes et standards	IEC/EN 60947-1 IEC/EN 60947-2 IEC/EN 60947-4-1 IEC/EN 60947-5-1 UL 60947-1 UL 60947-4-1

Technique UL/CSA

Short-Circuit Current Rating (SCCR)	Any UL Listed Fuses or Circuit-Breakers, Group Installations (480 V AC) 18 kA Any UL Listed Fuses or Circuit-Breakers, Group Installations (600 V AC) 5 kA
-------------------------------------	---

Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (480 V AC) 18 kA
Any UL Listed Fuses or Circuit-Breakers, Motor Disconnect (600 V AC) 5 kA

Maximum Operating Voltage UL/CSA	Circuit auxiliaire 250 V AC/DC Circuit principal 600 V AC
Puissance nominale UL/CSA	(200 V AC) Three Phase 7.5 Hp (208 V AC) Three Phase 10 Hp (220 ... 240 V AC) Three Phase 10 Hp (440 ... 480 V AC) Three Phase 20 Hp (550 ... 600 V AC) Three Phase 25 Hp
Full Load Amps Motor Use	(200 V AC) Three Phase 25.3 A (208 V AC) Three Phase 30.8 A (220 ... 240 V AC) Three Phase 28 A (440 ... 480 V AC) Three Phase 27 A (550 ... 600 V AC) Three Phase 27 A
Locked Rotor Amps	(200 V AC) Three Phase 146 A (208 V AC) Three Phase 179 A (220 ... 240 V AC) Three Phase 162 A (440 ... 480 V AC) Three Phase 145 A (550 ... 600 V AC) Three Phase 146 A
General Use Rating UL/CSA	(600 V AC) 32 A
Connecting Capacity Main Circuit UL/CSA	Flexible 1/2x 16-8 AWG Stranded 1/2x 16-8 AWG
Connecting Capacity Auxiliary Circuit UL/CSA	Flexible 1/2x 16-14 AWG Stranded 1/2x 16-14 AWG
Tightening Torque UL/CSA	Auxiliary Circuit 7 in-lb Main Circuit 18 in-lb
Contact Rating UL/CSA	B300 R300

Environnement

Température de l'air ambiant	Around the Enclosure 0 ... +40 °C Operation -25 ... +70 °C Operation Compensated -25 ... +55 °C Storage -50 ... +80 °C
Ambient Air Temperature Compensation	Oui
Altitude de fonctionnement maximale autorisée	2000 m
REACH Declaration	1SAA963005-4502
Résistance aux chocs selon CEI 60068-2-27	11 ms Pulse 25g
Resistance to Vibrations acc. to IEC 60068-2-6	5g / 3 ... 150 Hz
Informations RoHS	1SAA963006-4502
Statut RoHS	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019

Certificats et Déclarations (Numéro de document)

Certificat ABS	1SAA963000-0104
Certificat BV	1SAA963000-0204
CB Certificate	1SAA963005-2003
CQC Certificate	CQC2019010307170287

Declaration of Conformity - CCC	2020980307003381
Déclaration de Conformité - CE	1SAD101100-3401
Declaration of Conformity - UKCA	1SAD201100-3401
Certificat DNV	1SAA963000-0304
DNV GL Certificate	1SAA963000-0304
EAC Certificate	1SAA963000-2701
Certificat GL	1SAA963000-0402
KC Certificate	1SAA963000-1501
Certificat LR	1SAA963000-0505
Certificat RMRS	1SAA918000-0704
Certificat UL	E137861-20001218

Emballage

Emballage Niveau 1 Unités	box 1 pièce
Emballage Niveau 1 Largeur	92 mm
Emballage Niveau 1 Longueur	102 mm
Emballage Niveau 1 Hauteur	50 mm
Emballage Niveau 1 Poids	0.341 kg
Emballage Niveau 1 EAN	4013614405648
Emballage Niveau 2 Unités	carton 40 pièce
Emballage Niveau 2 Largeur	280 mm
Emballage Niveau 2 Longueur	395 mm
Emballage Niveau 2 Hauteur	210 mm
Emballage Niveau 2 Poids	14.026 kg
Emballage Niveau 2 EAN	4013614408908

Classifications

Code de classification d'objet	F
ETIM 4	EC000074 - Motor protective circuit-breaker
ETIM 5	EC000074 - Motor protective circuit-breaker
ETIM 6	EC000074 - disjoncteur/démarrreur de moteur
ETIM 7	EC000074 - Motor protection circuit-breaker
ETIM 8	EC000074 - Motor protection circuit-breaker
eClass	V11.0 : 27370401
UNSPSC	39121521
Code de catégorie	4845 >> 3 Pole Motor Circuit Protector Circuit Breakers

granulaire IDEA (IGCC)

E-Number (Finland)

3705878

Accessories

Identifier	Description	Type	Quantity	Unit Of Measure
1SAM201901R1001	HKF1-11 Auxiliary Contact	HKF1-11	1	piece
1SAM201901R1201	HKF1-11K Auxiliary Contact	HKF1-11K	1	piece
1SAM201901R1002	HKF1-20 Auxiliary Contact	HKF1-20	1	piece
1SAM201901R1202	HKF1-20K Auxiliary Contact	HKF1-20K	1	piece
1SAM201901R1004	HKF1-01 Auxiliary Contact	HKF1-01	1	piece
1SAM201901R1003	HKF1-10 Auxiliary Contact	HKF1-10	1	piece
1SAM201902R1002	HK1-20 Auxiliary Contact	HK1-20	1	piece
1SAM201902R1202	HK1-20K Auxiliary Contact	HK1-20K	1	piece
1SAM201902R1001	HK1-11 Auxiliary Contact	HK1-11	1	piece
1SAM201902R1201	HK1-11K Auxiliary Contact	HK1-11K	1	piece
1SAM201902R1003	HK1-02 Auxiliary Contact	HK1-02	1	piece
1SAM201902R1203	HK1-02K Auxiliary Contact	HK1-02K	1	piece
1SAM201902R1004	HK1-20L Auxiliary Contact	HK1-20L	1	piece
1SAM201902R1204	HK1-20LK Auxiliary Contact	HK1-20LK	1	piece
1SAM201903R1002	SK1-20 Signaling Contact	SK1-20	1	piece
1SAM201903R1202	SK1-20K Signaling Contact	SK1-20K	1	piece
1SAM201903R1005	SK1-20AR Signaling Contact	SK1-20AR	1	piece
1SAM201903R1205	SK1-20ARK Signaling Contact	SK1-20ARK	1	piece
1SAM201903R1001	SK1-11 Signaling Contact	SK1-11	1	piece
1SAM201903R1201	SK1-11K Signaling Contact	SK1-11K	1	piece
1SAM201903R1004	SK1-11AR Signaling Contact	SK1-11AR	1	piece
1SAM201903R1204	SK1-11ARK Signaling Contact	SK1-11ARK	1	piece
1SAM201903R1003	SK1-02 Signaling Contact	SK1-02	1	piece
1SAM201903R1203	SK1-02K Signaling Contact	SK1-02K	1	piece
1SAM201903R1006	SK1-02AR Signaling Contact	SK1-02AR	1	piece
1SAM201903R1206	SK1-02ARK Signaling Contact	SK1-02ARK	1	piece
1SAM201910R1001	AA1-24 Shunt Trip	AA1-24	1	piece
1SAM201910R1002	AA1-110 Shunt Trip	AA1-110	1	piece
1SAM201910R1003	AA1-230 Shunt Trip	AA1-230	1	piece
1SAM201910R1004	AA1-400 Shunt Trip	AA1-400	1	piece
1SAM201904R1010	UA1-20 Undervoltage Release	UA1-20	1	piece
1SAM201904R1001	UA1-24 Undervoltage Release	UA1-24	1	piece
1SAM201904R1002	UA1-48 Undervoltage Release	UA1-48	1	piece
1SAM201904R1003	UA1-60 Undervoltage Release	UA1-60	1	piece
1SAM201904R1004	UA1-110 Undervoltage Release	UA1-110	1	piece
1SAM201904R1008	UA1-208 Undervoltage Release	UA1-208	1	piece
1SAM201904R1005	UA1-230 Undervoltage Release	UA1-230	1	piece
1SAM201904R1006	UA1-400 Undervoltage Release	UA1-400	1	piece
1SAM201904R1007	UA1-415 Undervoltage Release	UA1-415	1	piece

1SAM201904R1009	UA1-575 Undervoltage Release	UA1-575	1	piece
1SAM201906R1102	PS1-2-0-65 Busbar	PS1-2-0-65	1	piece
1SAM201906R1112	PS1-2-1-65 Busbar	PS1-2-1-65	1	piece
1SAM201906R1122	PS1-2-2-65 Busbar	PS1-2-2-65	1	piece
1SAM201916R1103	PS1-3-0-100 Busbar	PS1-3-0-100	1	piece
1SAM201906R1103	PS1-3-0-65 Busbar	PS1-3-0-65	1	piece
1SAM201916R1113	PS1-3-1-100 Busbar	PS1-3-1-100	1	piece
1SAM201906R1113	PS1-3-1-65 Busbar	PS1-3-1-65	1	piece
1SAM201916R1123	PS1-3-2-100 Busbar	PS1-3-2-100	1	piece
1SAM201906R1123	PS1-3-2-65 Busbar	PS1-3-2-65	1	piece
1SAM201916R1104	PS1-4-0-100 Busbar	PS1-4-0-100	1	piece
1SAM201906R1104	PS1-4-0-65 Busbar	PS1-4-0-65	1	piece
1SAM201916R1114	PS1-4-1-100 Busbar	PS1-4-1-100	1	piece
1SAM201906R1114	PS1-4-1-65 Busbar	PS1-4-1-65	1	piece
1SAM201906R1124	PS1-4-2-65 Busbar	PS1-4-2-65	1	piece
1SAM201916R1105	PS1-5-0-100 Busbar	PS1-5-0-100	1	piece
1SAM201906R1105	PS1-5-0-65 Busbar	PS1-5-0-65	1	piece
1SAM201916R1115	PS1-5-1-100 Busbar	PS1-5-1-100	1	piece
1SAM201906R1115	PS1-5-1-65 Busbar	PS1-5-1-65	1	piece
1SAM201906R1125	PS1-5-2-65 Busbar	PS1-5-2-65	1	piece
1SAM201907R1101	S1-M1-25 Power Infeed Block	S1-M1-25	1	piece
1SAM201907R1102	S1-M2-25 Power Infeed Block	S1-M2-25	1	piece
1SAM201907R1103	S1-M3-25 Power Infeed Block	S1-M3-25	1	piece
1SAM201913R1103	S1-M3-35 Power Infeed Block	S1-M3-35	1	piece
1SAM201914R1002	S1-PB1-25 Power Infeed Block	S1-PB1-25	1	piece
1SAM201914R1001	PB1-1-32 Connecting Link	PB1-1-32	1	piece
1SAM201908R1001	BS1-3 Protection Cover	BS1-3	1	piece
1SAM201909R1001	FS116 Screw Fixing Kit	FS116	1	piece
GJF1101903R0001	SA1 Terminals and Installation Material	SA1	1	piece
GJF1101903R0002	SA2 Terminals and Installation Material	SA2	1	piece
GJF1101903R0003	SA3 Terminals and Installation Material	SA3	1	piece
1SAM201911R1012	IB132-F Enclosure	IB132-F	1	piece
1SAM201911R1010	IB132-G Enclosure	IB132-G	1	piece
1SAM201911R1011	IB132-Y Enclosure	IB132-Y	1	piece
1SAM201912R1010	DMS132-G Door Mounting Kit	DMS132-G	1	piece
1SAM201912R1011	DMS132-Y Door Mounting Kit	DMS132-Y	1	piece
1SAM201909R1021	MSAH1 Shaft Supporter	MSAH1	1	piece
1SAM201920R1001	MSHD-LB Handles	MSHD-LB	1	piece
1SAM201920R1002	MSHD-LY Handles	MSHD-LY	1	piece
1SAM201920R1000	MSH-AR Shaft Alignment Ring	MSH-AR	1	piece
1SAM101923R0002	MSMN Driver	MSMN	1	piece
1SCA101655R1001	OXS6X130 SHAFT	OXS6X130	1	piece
1SAM101923R0012	MSMNO Driver	MSMNO	1	piece
1SCA101659R1001	OXS6X180 SHAFT	OXS6X180	1	piece
1SCA101647R1001	OXS6X85 SHAFT	OXS6X85	1	piece
1SCA108043R1001	OXS6X105 SHAFT	OXS6X105	1	piece

Catégories

Produits basse tension → Disjoncteurs de puissance → Disjoncteurs-moteurs

Produits basse tension → Produits de Contrôle, Protection et sécurité machines → Disjoncteurs-moteurs → Disjoncteurs-moteurs

