

Cable Tray

perforated

RL 35.150 F


EAN Code: 4013339213009

Smallest packaging unit: 2 x 3 m

quantity unit: m M



the photorealistic images are to be considered as reference images

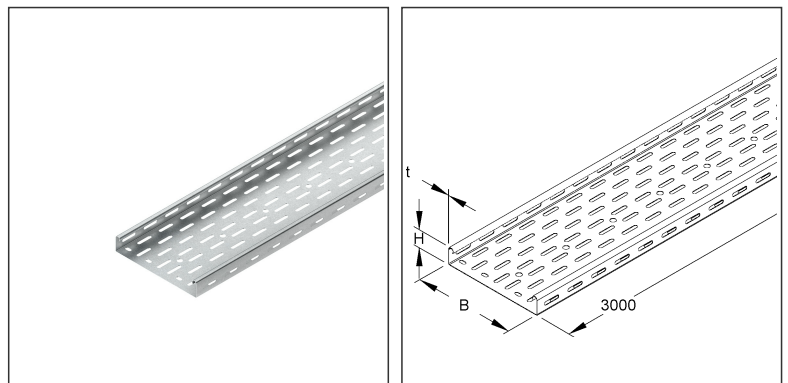

Article Description

Cable tray, 35x150x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Cable Tray System

RL 35.150 F

the photorealistic images are to be considered as reference images

Incl. accessories

3 meter = 1 piece		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
1-FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	6 pcs.	
1-RV 35.150 F	Splice plate, single, U-shaped, 24x147 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	1	
6 meter = 1 bundle		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	12 pcs.	
RV 35.150 F	Splice plate, single, U-shaped, 24x147 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	2	
750 meter = 1 rack		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	1.500 pcs.	
RV 35.150 F	Splice plate, single, U-shaped, 24x147 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	250	

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	1,699 kg / m
Weight in kg per 100	170 kg / 100m

Physical Article Dimensions

Height	35.00 mm
Width	150.00 mm
Depth/length	3000 mm

Packing Dimension

6 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	155.00 mm	Height	40.00 mm
Gross weight	10 kg	Volume	0,019 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		
750 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1372 kg	Volume	3,904 m³		
Min. Quantity	750.00 m	Max. Quantity	750.00 m		

Technical Datasheet

Cable Tray System

RL 35.150 F

the photorealistic images are to be considered as reference images

Tender Text

Cable tray, acc. to DIN EN 61537, with offset bottom and side perforations and continuous central hole in the bottom for additional fastenings, including one-piece U-shaped splice plate RV 35... and hot-dip galvanised proportional fastening accessories.

Dimensions (approx. dimensions) H x W : 35 x 150 mm

Material thickness : 0.9 mm

Centre perforation : Ø 11 mm

Delivery length : 3000 mm

Usable cross-section : 5050 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN 1461

NIEDAX Model No. : RL 35.150 F

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 150 F	Cover for cable tray/-ladder, with joint strip, 152x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310
RDRS 9 F	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RDV 150 F	Cover for cable tray/-ladder, with joint strip, 152x3000 mm, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
RW 35 F	Barrier strip, 30x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories