11RFA9023



MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE Electric (THREE-PHASE), AUTOMATIC RESETTING. DIRECT MOUNTING ON BG06, BG09, BG12 MINI-AND AUTOMATION CONTACTORS, 0.14...0.23A



| Product designation | | | 11RFA9 |
|--|-------------------------|------|---------------------------|
| Product type designation | | | Motor protection relay |
| General characteristics | | | |
| Number of poles | | Nr. | 3 |
| Overvoltage category | | | |
| Pollution degree | | | 3 |
| Frontal IP degree | | | IP20 |
| Type of release | | | Thermal |
| Protection fuse | | | |
| | aM (IEC) | А | 0.5 |
| | RK5 (UL) | А | 1 |
| Phase failure detection | | | yes |
| Reset mode | | | Automatic |
| Power circuit characteristics | | | |
| Rated insulation voltage Ui IEC/EN | | V | 690 |
| Rated impulse withstand voltage Uimp | | kV | 8 |
| Rated operational voltage | | V | 690 |
| Operational frequency | | | |
| | min | Hz | 0 |
| | max | Hz | 400 |
| Operational current le | | | |
| | Operational current min | А | 0.14 |
| | Operational current max | А | 0.23 |
| Tripping class | | | 10A |
| Test Button | | | yes |
| Trip indicator | | | yes |
| Terminals | | | |
| | turo 0 | | screw and |
| | type | | washer |
| | screw | | M4 |
| | width | mm | 9.8 |
| | tool | | Phillips 2 |
| Tightening torque for terminals | | | |
| | min | Nm | 2.3 |
| | max | Nm | 2.3 |
| | min | Ibin | 1.7 |
| | max | lbin | 1.7 |
| Conductor section | | | |
| | AWG/kcmil max | | 10 |
| Auxiliary circuit characteristics | | | |
| Auxiliary contacts | | | |
| | NO | Nr. | 1 |
| | NC | Nr. | 1 |
| Auxiliary Rated insulation voltage Ui IEC/EN | | V | 690 |



ENERGY AND AUTOMATION

11RFA9023 MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), AUTOMATIC RESETTING. DIRECT MOUNTING ON BG06, BG09, BG12 MINI-

CONTACTORS, 0.14...0.23A


| Auxiliary Rated impulse withstand voltage Uimp | | kV | 6 |
|--|---|------|-----------------|
| Auxiliary Rated operational voltage | | V | 690 |
| Operating current AC15 | | | |
| | 24V | А | 1.5 |
| | 120V | А | 1.5 |
| | 240V | А | 0.75 |
| IEC Conventional free air thermal current Ith | | А | 10 |
| Terminals | | | |
| | | | screw and |
| | Auxiliary circuit type | | washer |
| | Auxiliary circuit screw | | M3,5 |
| | Auxiliary circuit width | mm | 8 |
| | Auxiliary circuit tool | | Phillips 1 |
| Conductor section | | | |
| | Auxiliary circuit Flexible w/o lug max | mm² | 2.5 |
| | Auxiliary circut Flexible c/w lug max | mm² | 2.5 |
| Tightening torque for terminals | , | | |
| 5 5 1 | Auxiliary circuit min | Nm | 1 |
| | Auxiliary circuit max | Nm | 1 |
| | Auxiliary circuit min | Ibin | 0.74 |
| | Auxiliary circuit max | Ibin | 0.74 |
| UL/CSA and IEC/EN 60947-5-1 designation | | | C300-R300 |
| Ambient conditions | | | |
| Operating temperature | | | |
| | min | °C | -20 |
| | max | °C | 55 |
| Storage temperature | | | |
| | min | °C | -55 |
| | max | °C | 70 |
| Compensation temperature | | | |
| | min | °C | -15 |
| | max | °Č | 55 |
| Max altitude | max | m | 3000 |
| Mechanical features | | | 0000 |
| Operating position | | | |
| | normal | | Vertical plan |
| | allowable | | ±30° |
| | anowable | | Direct mounting |
| Fixing | | | on BG06 |
| · ······· · ·························· | | | BG09 BG12 |
| Weight | | g | 116 |
| UL technical data | | 3 | |
| Full-load current (FLA) for three-phase AC motor | | | |
| | at 480V | А | 0.23 |
| | ai +00 V | ~ | 0.20 |
| | at 600V | А | 0.23 |

11RFA9023




ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), AUTOMATIC RESETTING. DIRECT MOUNTING ON BG06, BG09, BG12 MINI-CONTACTORS, 0.14...0.23A

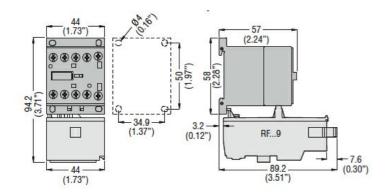

Wiring diagrams

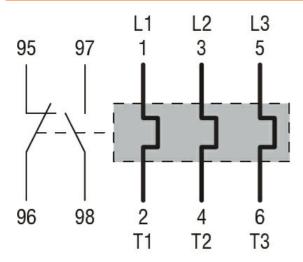

Certifications and compliance

| Compliance | |
|---------------------|------------------|
| | CSA C22.2 n° 14 |
| | IEC/EN 60947-1 |
| | IEC/EN 60947-4-1 |
| | UL508 |
| Certifications | |
| | CCC |
| | CSA |
| | cULus |
| | EAC |
| ETIM classification | |

ETIM 8.0

EC000106 -Thermal overload relay