

Mini Cable Tray

perforated, C-shaped



RL 50.050 F

EAN Code: 4013339209644

Smallest packaging unit: 2 x 3 m

quantity unit: m M

the photorealistic images are to be considered as reference images

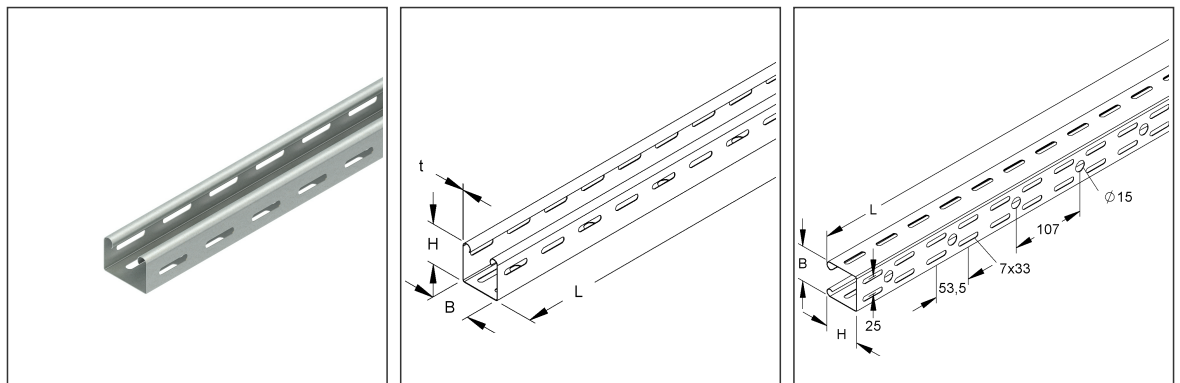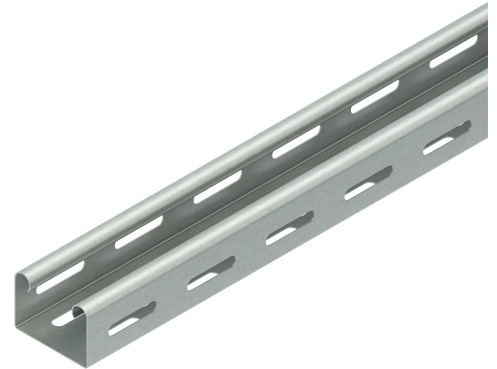

Article Description

Mini cable tray, 50x50x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Cable Tray System

RL 50.050 F

the photorealistic images are to be considered as reference images

Incl. accessories

3 meter = 1 piece		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
1-RV 50.050 F	Splice plate, single, U-shaped, 40x47 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	1 pcs.	
6 meter = 1 bundle		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
RV 50.050 F	Splice plate, single, U-shaped, 40x47 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	2 pcs.	
1350 meter = 1 rack		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
RV 50.050 F	Splice plate, single, U-shaped, 40x47 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	450 pcs.	

Additional Price Information

Article group	N13
quantity unit	m

Weight


Weight per quantity unit	1,066 kg/ m
Weight in kg per 100	107 kg/ 100m

Physical Article Dimensions

Height	50.00 mm
Width	50.00 mm
Depth/length	3000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

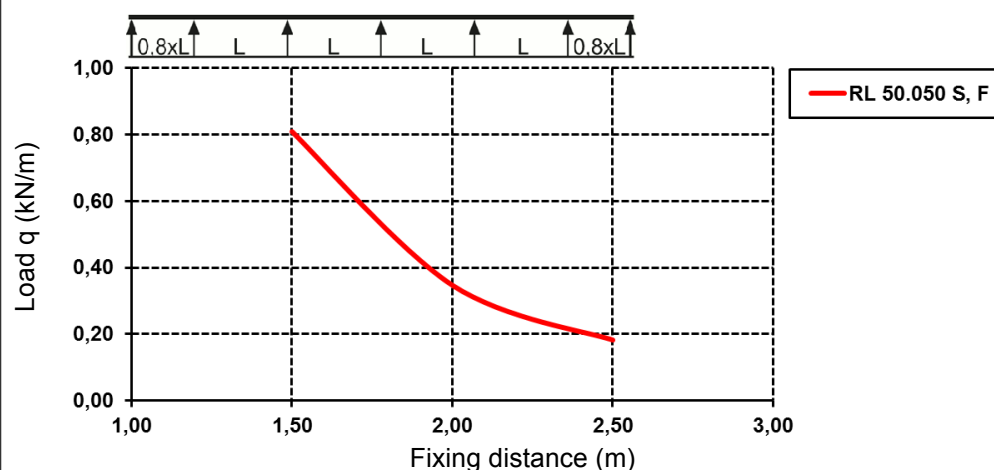

Technical Datasheet

Cable Tray System

RL 50.050 F

the photorealistic images are to be considered as reference images

Packing Dimension

6 meters = 1 bundle		✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU			
Lenght	3000 mm	Width	55.00 mm	Height	55.00 mm
Gross weight	6,39 kg	Volume	0,009 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

1350 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1536 kg	Volume	3,904 m³		
Min. Quantity	1.350.00 m	Max. Quantity	1.350.00 m		

Tender Text

Mini cable tray, acc. to DIN EN IEC 61537, C-shaped, with continuous bottom and side perforation, including one-piece U-shaped splice plate RV 50... and proportional fastening accessories in hot-dip galvanised.

Dimensions (approx. dimensions) H x W : 50 x 50 mm

Material thickness : 0.75 mm

Centre hole : Ø 15 mm

Centre hole distance : 107 mm

Delivery length : 3000 mm

Usable cross section : 2300 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : RL 50.050 F

EP material_____ EP wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 50 F	Mini-cable tray cover, with joint strip, 52x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310
RDRS 9 F	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RDV 50 F	Mini-cable tray cover with joint strip, 52x3000 mm, steel, hot dip galvanised DIN EN ISO 1461

Technical Datasheet

Cable Tray System

RL 50.050 F

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
RW 50 F	Barrier strip, 47x3000 mm, t=0,75 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories