


# Product Environmental Profile



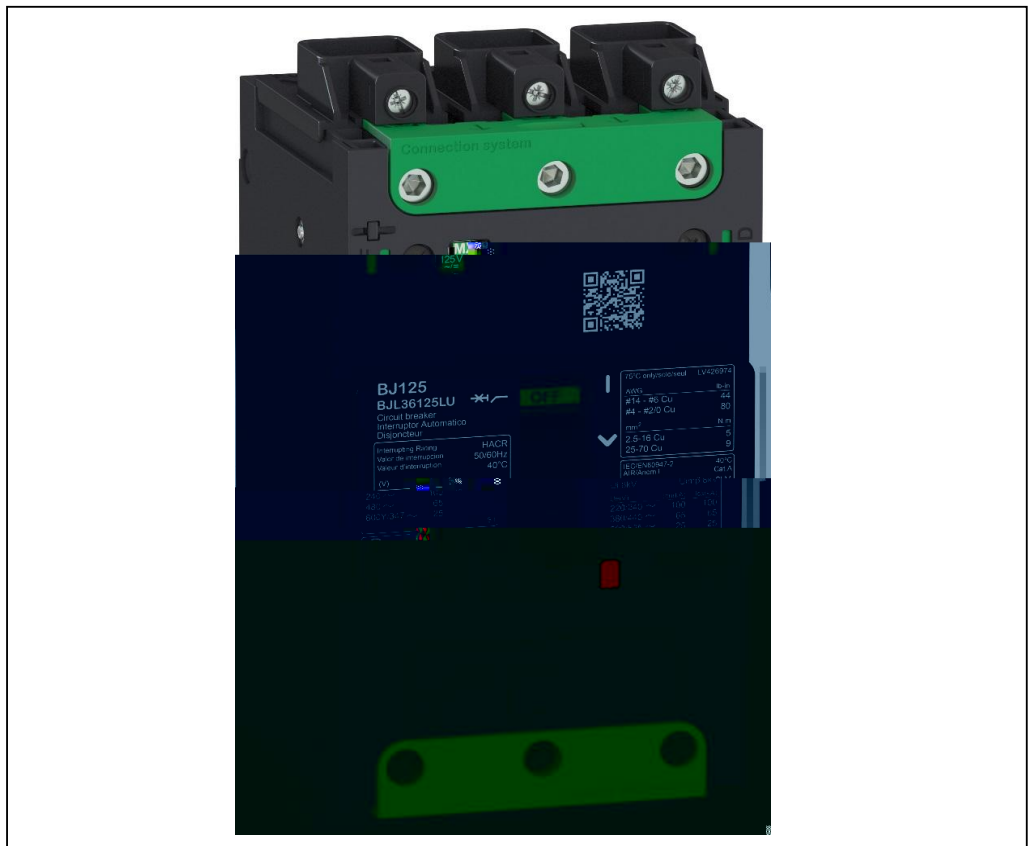

## General information

### Representative product

### Description of the product

The PowerPact B-frame B JL36125LU three pole circuit breaker equipped with a thermal magnetic trip unit is designed to provide protection against overloads and short-circuits for electrical distribution systems with assigned voltage up to 600Y/347VAC and rated current of 125A.

### Functional unit

Protect during 20 years the installation against overloads and short-circuits in circuit with assigned voltage up to 600Y/347VAC and 125A rated current. This protection is ensured in accordance with the following parameters:


- Number of poles: 3
- Rated short-circuit current interruption rating Ii at 480Vac = 65kA (according to UL489)
- Tripping curve: long time and instantaneous protections



## Constituent materials

### Reference product mass

1328 g including the product, its packaging and additional elements and accessories

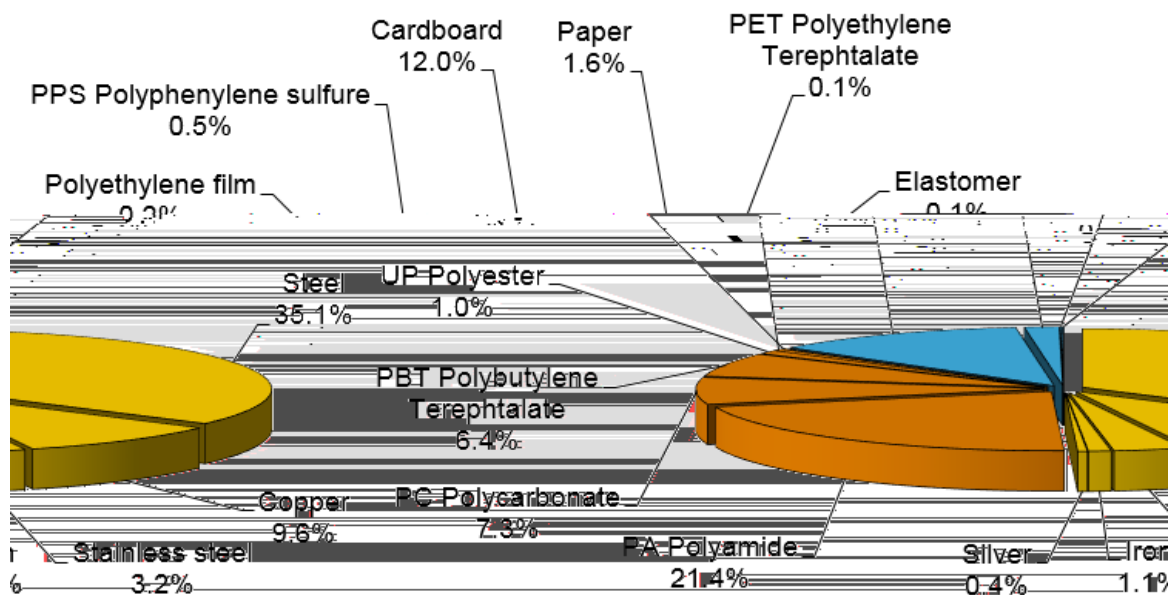

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



<b>Manufacturing</b>  <b>Distribution</b>  <b>Installation</b>  <b>Use</b>	<p>Product distribution optimised by setting up local distribution centres</p> <p>End of life optimized to decrease the amount of waste and allow recovery of the product components and materials</p> <p>Recyclability potential:     <b>53%</b>     (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).</p>
--	---




<b>Use scenario</b>	<p>No special components needed</p> <p>Product dissipation is 7.08 W considering a 50% load rate, service uptime percentage is 30%.</p> <p>North America</p> <p>The PowerPact B-frame B JL36125LU three pole circuit breaker equipped with a thermal magnetic trip unit is designed to provide protection against overloads and short-circuits for electrical distribution systems with assigned voltage up to 600Y/347VAC and rated current of 125A.</p>			
	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: Mexico	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US	Electricity mix; AC; consumption mix, at consumer; 120V; US

Compulsory indicators							
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	6,32E-03	6,32E-03	0*	0*	2,53E-06	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	2,68E-01	1,94E-02	1,52E-03	5,39E-05	2,47E-01	3,60E-04
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	6,99E-02	4,45E-03	3,51E-04	1,27E-05	6,50E-02	1,00E-04
Contribution to global warming	kg CO <sub>2</sub> eq	2,67E+02	8,81E+00	3,38E-01	0*	2,58E+02	1,89E-01
Contribution to ozone layer depletion	kg CFC11 eq	5,55E-06	8,72E-07	6,85E-10	1,10E-09	4,67E-06	8,11E-09
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	4,18E-02	2,16E-03	1,08E-04	5,85E-06	3,95E-02	3,76E-05

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	5,82E-01	1,26E-01	0*	0*	4,55E-01	1,64E-04
Total Primary Energy	MJ	3,61E+03	1,35E+02	4,53E+00	0*	3,47E+03	1,71E+00

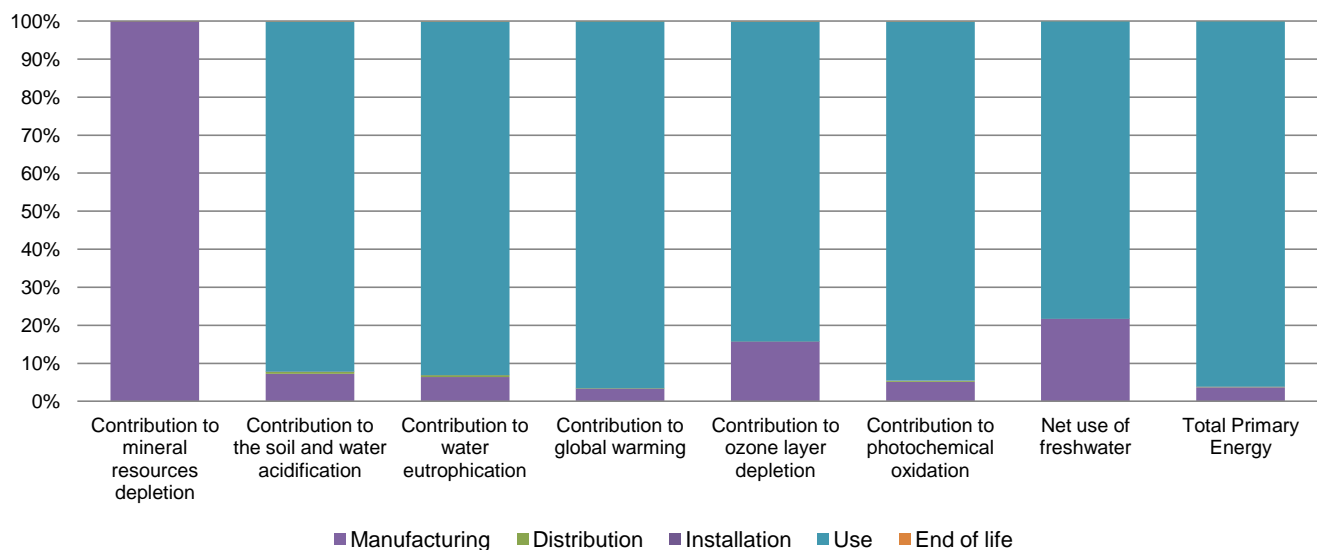

Optional indicators							
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	4,21E+03	1,22E+02	4,75E+00	0*	4,08E+03	1,60E+00
Contribution to air pollution	m <sup>3</sup>	2,43E+04	2,35E+03	1,40E+01	0*	2,19E+04	1,27E+01
Contribution to water pollution	m <sup>3</sup>	1,36E+04	7,98E+02	5,56E+01	2,05E+00	1,27E+04	1,52E+01

Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,79E-01	1,79E-01	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2,12E+02	3,72E+00	0*	0*	2,08E+02	0*
Total use of non-renewable primary energy resources	MJ	3,40E+03	1,31E+02	4,53E+00	0*	3,26E+03	1,70E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2,12E+02	3,37E+00	0*	0*	2,08E+02	0*
Use of renewable primary energy resources used as raw material	MJ	3,52E-01	3,52E-01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	3,39E+03	1,18E+02	4,53E+00	0*	3,26E+03	1,70E+00
Use of non renewable primary energy resources used as raw material	MJ	1,30E+01	1,30E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*


Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	9,06E+01	8,18E+01	0*	1,92E-01	6,89E+00	1,76E+00
Non hazardous waste disposed	kg	4,23E+01	2,88E+00	1,20E-02	0*	3,94E+01	5,37E-03
Radioactive waste disposed	kg	5,34E-03	1,27E-03	8,56E-06	1,28E-06	4,05E-03	8,47E-06
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	9,09E-01	9,14E-02	0*	1,86E-01	0*	6,32E-01
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,90E-02	3,68E-03	0*	0*	0*	2,53E-02
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	SCHN-00132-V02.01-EN	Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH08	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Date of issue	12/2016	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
		Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	External	X	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			
			

Schneider Electric USA, Inc

Country Customer Care Center

<http://www2.schneider-electric.com/sites/corporate/en/support/operations/local-operations/local-operations.page>

1-888-SquareD (1-888-778-2733)

800 Federal Street

Andover, MA 01810

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

SCHN-00132-V02.01-EN

12/2016