

# Product Environmental Profile

**POWER CONTACTOR-LC1-F150 150A 440V 3P**






## General information

Representative product	POWER CONTACTOR-LC1-F150 150A 440V 3P -LC1F150M5
Description of the product	The product POWER CONTACTOR-LC1-F150 150A 440V 3P makes and breaks currents for motor loads and resistive loads at voltages up to 1000V AC.
Functional unit	To make and break currents up to 150A for motor loads for 20 years. Contactor type 3Poles and 230V 50Hz coil for switching power under 1000V and 150A.



## Constituent materials

Reference product mass	3791.5 g including the product, its packaging and additional elements and accessories
------------------------	---

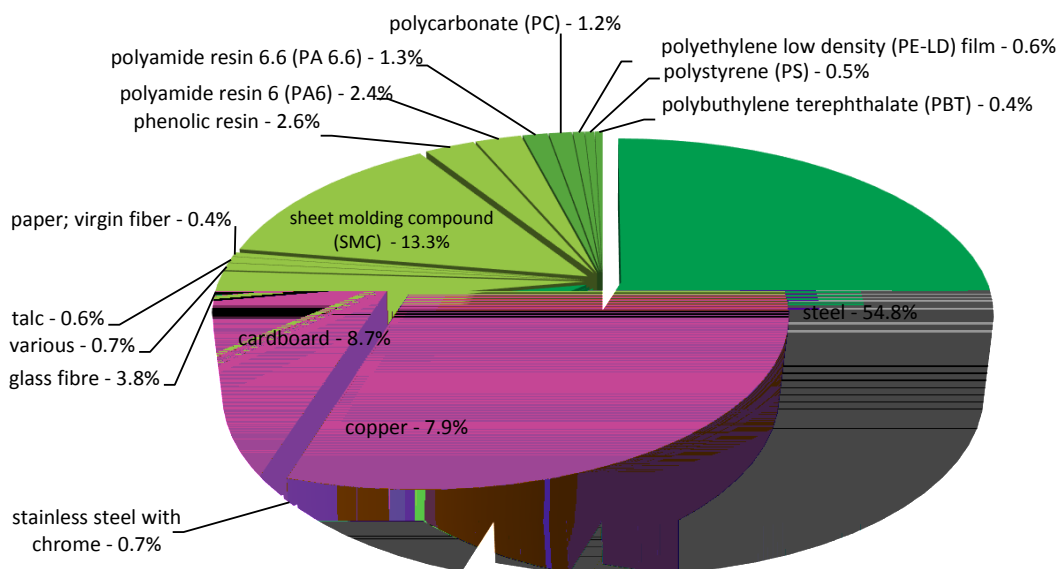

## Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 8 June 2011) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) as mentioned in the Directive

As the products of the range are designed in accordance with the RoHS Directive (European Directive 2002/95/EC of 27 January 2003), they can be incorporated without any restriction in an assembly or an installation subject to this Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

## Additional environmental information

The POWER CONTACTOR-LC1-F150 150A 440V 3P presents the following relevant environmental aspects


<b>Manufacturing</b>	Manufactured at a Schneider Electric production site ISO14001 certified
<b>Distribution</b>	Weight and volume of the packaging optimized, based on the European Union's packaging directive
	Packaging weight is 384.1 g, consisting of cardboard (326g), paper (15.1g), Polyethylene film (23g) and Polystyrene (20g)  Product distribution optimised by setting up local distribution centres
<b>Installation</b>	Ref LC1F150M5 does not require any installation operations.
<b>Use</b>	The product does not require special maintenance operations.
<b>End of life</b>	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials
	This product contains Plastic parts with brominated FR (104.1g) that should be separated from the stream of waste so as to optimize end-of-life treatment.
	The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website  <a href="http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page">http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page</a>
	Recyclability potential: <b>69%</b> (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

## Environmental impacts

<b>Reference life time</b>	20 years			
<b>Product category</b>	Passive products - non-continuous operation			
<b>Installation elements</b>	No special components needed			
<b>Use scenario</b>	Product dissipation is 47.16 W full load, loading rate is 30% and service uptime percentage is 30%			
<b>Geographical representativeness</b>	Europe			
<b>Technological representativeness</b>	The product POWER CONTACTOR-LC1-F150 150A 440V 3P makes and breaks currents for motor loads and resistive loads at voltages up to 1000V AC.			
<b>Energy model used</b>	<b>Manufacturing</b>	<b>Installation</b>	<b>Use</b>	<b>End of life</b>
	Energy model used: France	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity Mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		POWER CONTACTOR-LC1-F150 150A 440V 3P - LC1F150M5					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	1.79E-02	1.79E-02	0*	0*	6.67E-05	0*
Contribution to the soil and water acidification	kg SO <sub>2</sub> eq	1.11E+01	4.96E-02	2.23E-03	0*	1.11E+01	0*
Contribution to water eutrophication	kg PO <sub>4</sub> <sup>3-</sup> eq	4.23E-01	7.76E-03	5.14E-04	0*	4.15E-01	2.64E-04
Contribution to global warming	kg CO <sub>2</sub> eq	1.48E+03	1.77E+01	4.89E-01	0*	1.46E+03	4.54E-01
Contribution to ozone layer depletion	kg CFC11 eq	3.73E-04	1.78E-05	0*	0*	3.56E-04	0*
Contribution to photochemical oxidation	kg C <sub>2</sub> H <sub>4</sub> eq	5.28E-01	4.82E-03	1.59E-04	0*	5.23E-01	1.06E-04
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m <sup>3</sup>	4.07E+00	2.52E-01	0*	0*	3.82E+00	4.35E-04
Total Primary Energy	MJ	3.00E+04	3.68E+02	6.92E+00	0*	2.96E+04	5.49E+00

ENVPEP111201EN\_V1 - Product Environmental Profile - POWER CONTACTOR-LC1-F150 150A 440V 3P

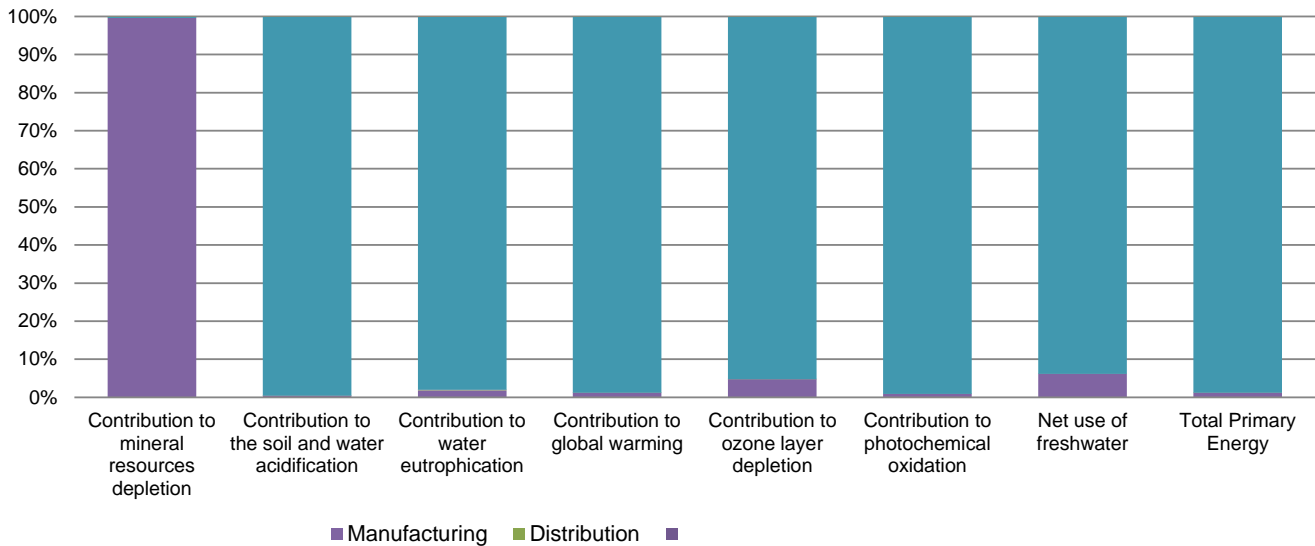

Optional indicators		POWER CONTACTOR-LC1-F150 150A 440V 3P - LC1F150M5					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	1.53E+04	2.29E+02	6.87E+00	0*	1.51E+04	4.51E+00
Contribution to air pollution	m³	6.89E+04	6.11E+03	2.08E+01	0*	6.28E+04	3.55E+01
Contribution to water pollution	m³	6.26E+04	1.04E+03	8.04E+01	0*	6.14E+04	4.09E+01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	5.75E-02	5.75E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	2.13E+03	1.20E+01	0*	0*	2.12E+03	0*
Total use of non-renewable primary energy resources	MJ	2.79E+04	3.56E+02	6.91E+00	0*	2.75E+04	5.48E+00
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	2.13E+03	5.03E+00	0*	0*	2.12E+03	0*
Use of renewable primary energy resources used as raw material	MJ	6.98E+00	6.98E+00	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	2.79E+04	3.35E+02	6.91E+00	0*	2.75E+04	5.48E+00
Use of non renewable primary energy resources used as raw material	MJ	2.08E+01	2.08E+01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	2.99E+02	2.94E+02	0*	7.70E-01	0*	4.44E+00
Non hazardous waste disposed	kg	5.48E+03	8.41E+00	0*	0*	5.47E+03	0*
Radioactive waste disposed	kg	4.47E+00	3.87E-03	0*	0*	4.46E+00	0*
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2.70E+00	3.42E-01	0*	0*	0*	2.35E+00
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	5.39E-02	6.84E-03	0*	2.15E-03	0*	4.49E-02
Exported Energy	MJ	0.00E+00	0*	0*	0*	0*	0*

\* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2015-04.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration N°	ENVPEP111201EN_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	03-2016	Supplemented by	PSR-0005-ed1-EN -2012 12 11
Validity period	5 years	Information and reference documents	<a href="http://www.pep-ecopassport.org">www.pep-ecopassport.org</a>
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »			

Schneider Electric Industries SAS

35, rue Joseph Monier  
 CS 30323  
 F- 92506 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439

[www.schneider-electric.com](http://www.schneider-electric.com)

Published by Schneider Electric

ENVPEP111201EN\_V1

03-2016