



Cable Tray

perforated

RL 110.600 F

EAN Code: 4013339139927
Smallest packaging unit: 2 x 3 m
quantity unit: m M

the photorealistic images are to be considered as reference images

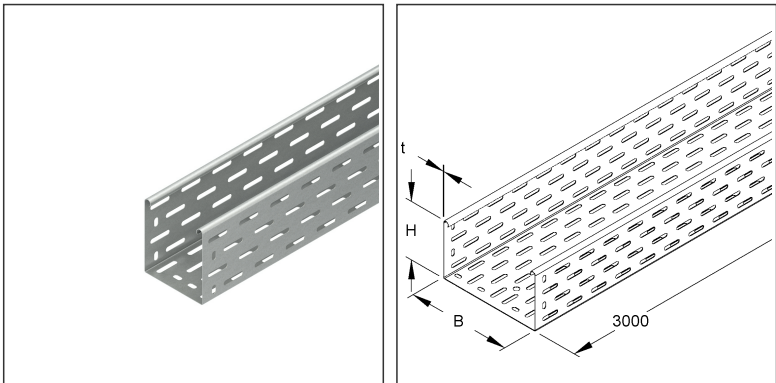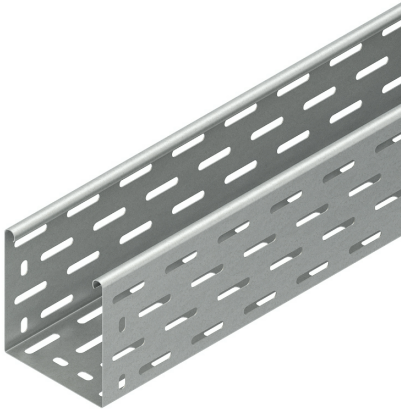

Article Description

Cable tray, 110x600x3000 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Incl. accessories

3 meter = 1 piece		✓ lowest delivery unit	– preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	16 pcs.	
RV 110.600 F	Splice plate, single, U-shaped, 99x597 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	1 pcs.	
6 meter = 1 bundle		– lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	32 pcs.	
RV 110.600 F	Splice plate, single, U-shaped, 99x597 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	2 pcs.	

Technical Datasheet

Cable Tray System

RL 110.600 F

the photorealistic images are to be considered as reference images

Additional Price Information

Article group	N13
quantity unit	m

Weight


Weight per quantity unit	6,349 kg / m
Weight in kg per 100	635 kg / 100m

Physical Article Dimensions

Height	110.00 mm
Width	600 mm
Depth/length	3000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

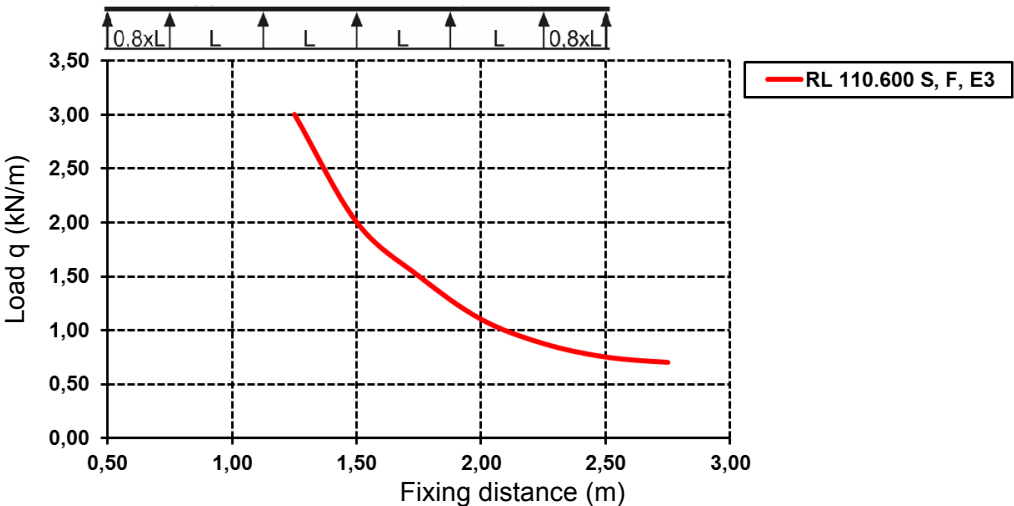

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	3000 mm	Width	600 mm	Height	110.00 mm
Gross weight	19 kg	Volume	0,198 m³		
Min. quantity	3.00 m	Max. Quantity	3.00 m		

6 meters = 1 bundle		✓ VP2-preferred PU			
Lenght	3000 mm	Width	605 mm	Height	115.00 mm
Gross weight	38 kg	Volume	0,209 m³		
Min. Quantity	6.00 m	Max. Quantity	6.00 m		

Tender Text

Cable tray acc. to DIN EN 61537, with offset bottom and side perforations, including one-piece U-shaped splice plate RV 110...F and proportional fastening

Technical Datasheet

Cable Tray System

RL 110.600 F

the photorealistic images are to be considered as reference images

Tender Text

accessories in hot-dip galvanised.
Dimensions (approx. dimensions) H x W : 110 x 600 mm
Material thickness t : 1 mm
Delivery length L : 3000 mm
Usable cross section : 65800 mm²
Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461
NIEDAX Model No. : RL 110.600 F
EP material_____ EP wage_____
Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 600 F	Cover for cable tray/-ladder, with joint strip, 602x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310
RDHK 110 E2	Cover retaining clamp, height 108 mm, stainless steel, material code: 1.4310
RDRS 9 F	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RDV 600 F	Cover for cable tray/-ladder, with joint strip, 602x3000 mm, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
RW 110 F	Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories