

Cable Tray

unperforated, but with connector perforations


RLU 110.100 F

EAN Code: 4013339244706

Smallest packaging unit: 2 x 3 m

quantity unit: m M

the photorealistic images are to be considered as reference images

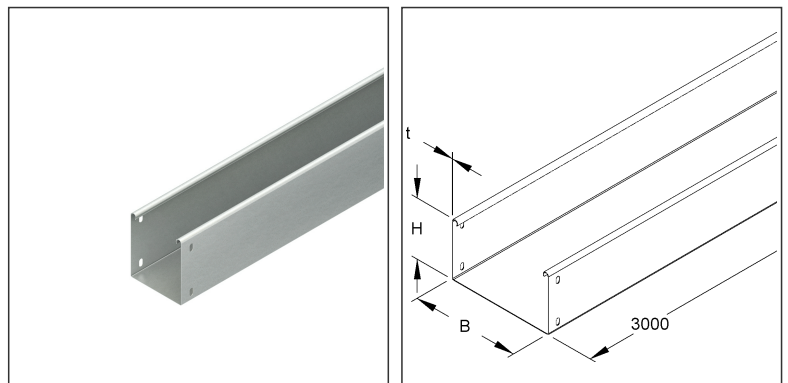

Article Description

Cable tray, 110x100x3000 mm, unperforated, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Cable Tray System

RLU 110.100 F

the photorealistic images are to be considered as reference images

Incl. accessories

3 meter = 1 piece		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
1-FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	8 pcs.	
1-RV 110.100 F	Splice plate, single, U-shaped, 99x97 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	1 pcs.	
6 meter = 1 bundle		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	16 pcs.	
RV 110.100 F	Splice plate, single, U-shaped, 99x97 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	2 pcs.	
384 meter = 1 rack		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	1.024 pcs.	
RV 110.100 F	Splice plate, single, U-shaped, 99x97 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	128 pcs.	

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	2,766 kg / m
Weight in kg per 100	277 kg / 100m

Physical Article Dimensions

Height	110.00 mm
Width	100.00 mm
Depth/length	3000 mm

Technical Datasheet


Cable Tray System

RLU 110.100 F

the photorealistic images are to be considered as reference images

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

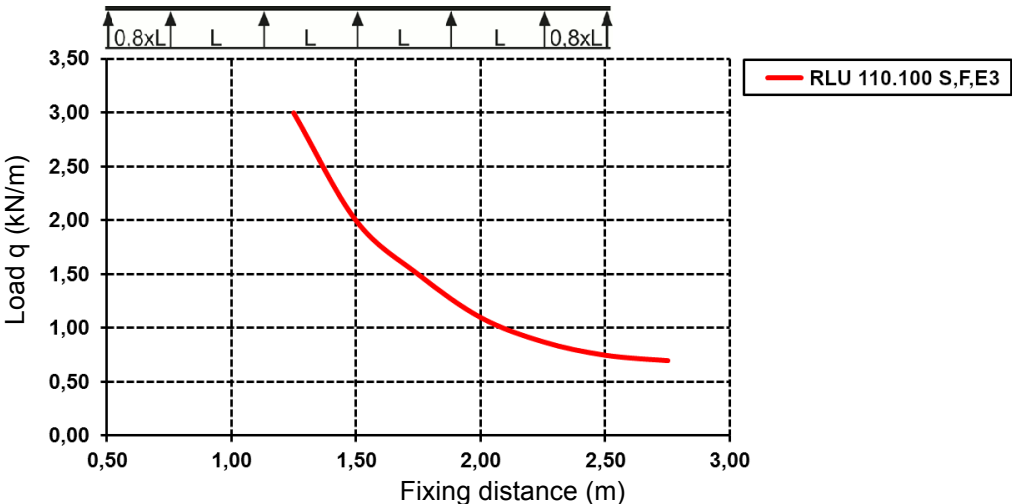

Packing Dimension

6 meters = 1 bundle

✓ VP1-smallest packaging unit (PU) ✓ VP1-preferred PU

Lenght	3000 mm	Width	105.00 mm	Height	115.00 mm
Gross weight	17 kg	Volume	0,036 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

384 meters = 1 rack

Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	1160 kg	Volume	3,904 m³		
Min. Quantity	384.00 m	Max. Quantity	384.00 m		

Tender Text

Cable tray acc. to DIN EN 61537, unperforated, with connector perforation for connection, including one-piece U-shaped splice plate RV 110...F and proportional fastening accessories in hot-dip galvanised.

Dimensions (approx. dimensions) H x W : 110 x 100 mm

Material thickness t : 0.9 mm

Delivery length L : 3000 mm

Usable cross-section : 10800 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : RLU 110.100 F

EP Material _____ EP Wage _____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable Tray System

RLU 110.100 F

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RDHK 110 E2	Cover retaining clamp, height 108 mm, stainless steel, material code: 1.4310
RDV 100 F	Cover for cable tray/-ladder, with joint strip, 102x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RD 100 F	Cover for cable tray/-ladder, with joint strip, 102x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RDRS 9 F	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310

Barrier strip

Model No.	Description
RW 110 F	Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories