

Cable Tray

unperforated, but with connector perforations


RLU 110.200 F

EAN Code: 4013339244904

Smallest packaging unit: 2 x 3 m

quantity unit: m M

the photorealistic images are to be considered as reference images

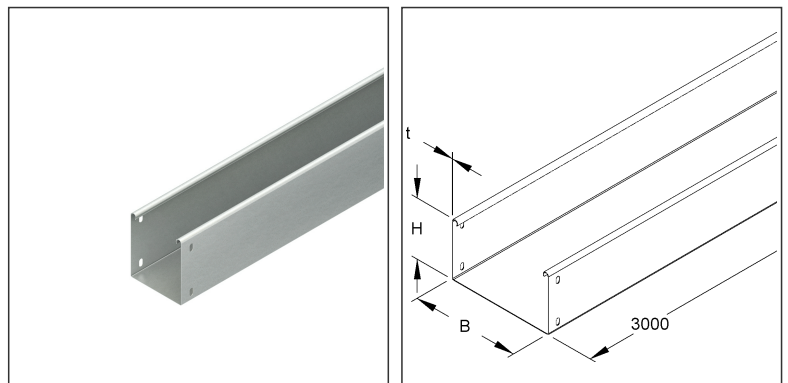

Article Description

Cable tray, 110x200x3000 mm, unperforated, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Cable Tray System

RLU 110.200 F

the photorealistic images are to be considered as reference images

Incl. accessories

3 meter = 1 piece		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
1-FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	8 pcs.	
1-RV 110.200 F	Splice plate, single, U-shaped, 99x197 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	1 pcs.	
6 meter = 1 bundle		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	16 pcs.	
RV 110.200 F	Splice plate, single, U-shaped, 99x197 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	2 pcs.	
192 meter = 1 rack		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	512 pcs.	
RV 110.200 F	Splice plate, single, U-shaped, 99x197 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	64 pcs.	

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	3,950 kg / m
Weight in kg per 100	395 kg / 100m

Physical Article Dimensions

Height	110.00 mm
Width	200.00 mm
Depth/length	3000 mm

Technical Datasheet


Cable Tray System

RLU 110.200 F

the photorealistic images are to be considered as reference images

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

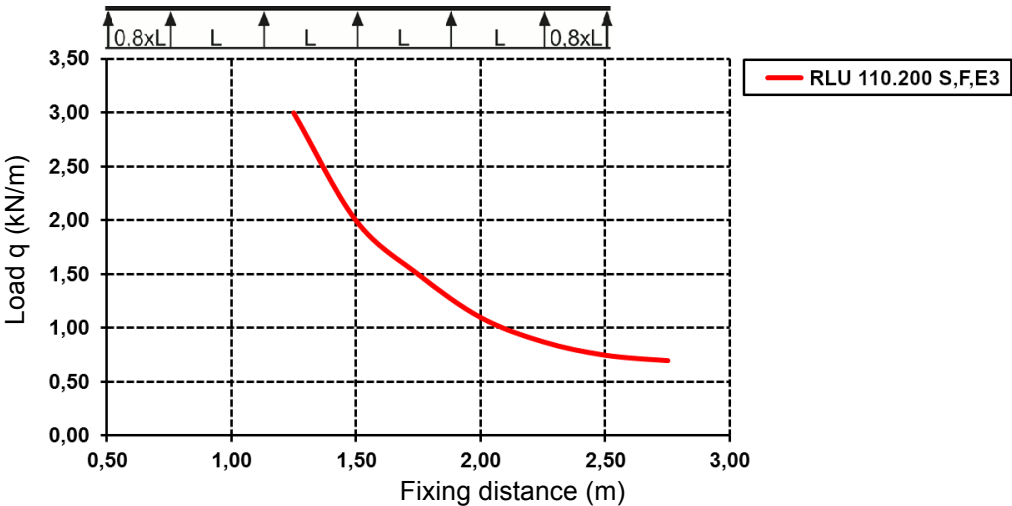

Packing Dimension

6 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	3000 mm	Width	205 mm	Height	115.00 mm
Gross weight	24 kg	Volume	0,071 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		

192 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	856 kg	Volume	3,904 m³		
Min. Quantity	192.00 m	Max. Quantity	192.00 m		

Tender Text

Cable tray acc. to DIN EN 61537, unperforated, with connector perforation for connection, including one-piece U-shaped splice plate RV 110...F and proportional fastening accessories in hot-dip galvanised.

Dimensions (approx. dimensions) H x W : 110 x 200 mm

Material thickness t : 1 mm

Delivery length L : 3000 mm

Usable cross-section : 21800 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : RLU 110.200 F

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Technical Datasheet

Cable Tray System

RLU 110.200 F

the photorealistic images are to be considered as reference images

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 200 F	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RDHK 110 E2	Cover retaining clamp, height 108 mm, stainless steel, material code: 1.4310
RDRS 9 F	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RDV 200 F	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, steel, hot dip galvanised DIN EN ISO 1461
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310

Barrier strip

Model No.	Description
RW 110 F	Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories