


Wide Span Cable Tray

perforated, with continuous perforated and beaded side profiles

WRL 105.200 F

EAN Code: 4013339587803

the photorealistic images are to be considered as reference images

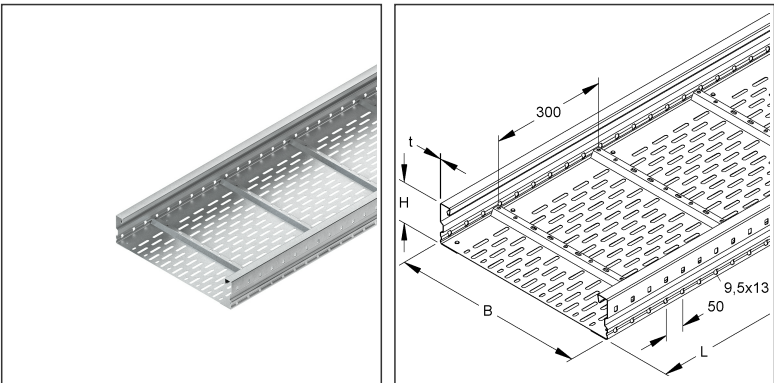

Article Description

Wide span cable tray, 105x200x6000 mm, t=1,5 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group	N13
---------------	-----

Weight

Weight per quantity unit	6,868 kg
Weight in kg per 100	687 kg

Physical Article Dimensions

Height	105.00 mm
Width	200.00 mm
Depth/length	6000 mm


Technical Datasheet

Long Span Cable Tray

WRL 105.200 F

the photorealistic images are to be considered as reference images

Load Specifications

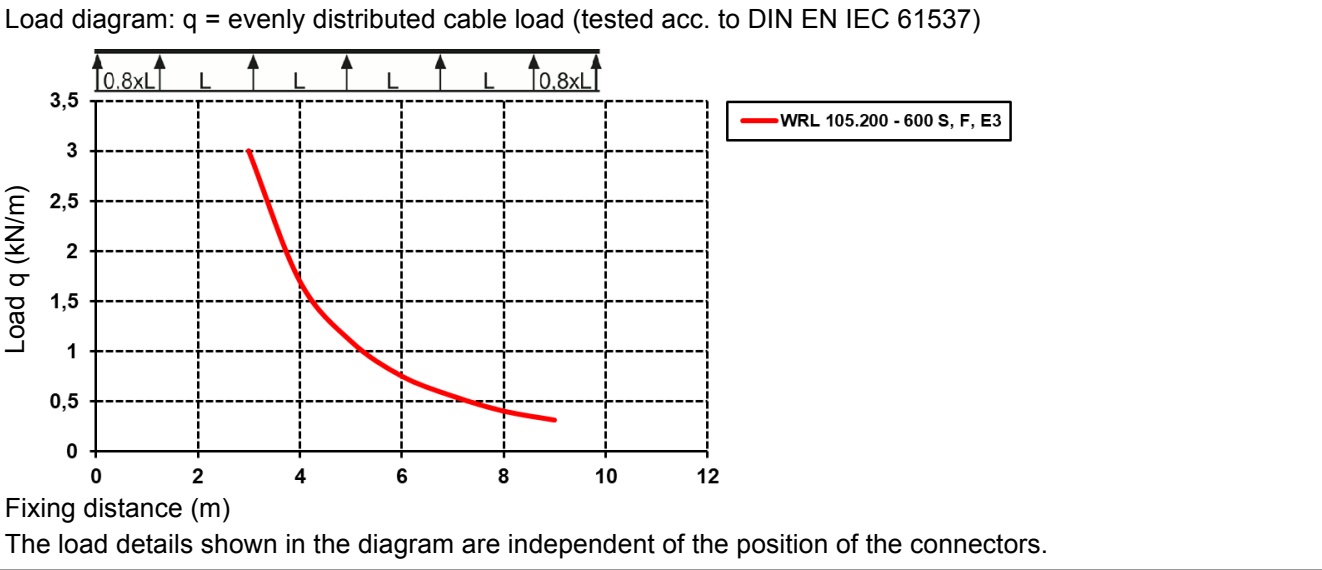

Packing Dimension

6 meters = 1 piece		✓ VP1-smallest packaging unit (PU)		✓ VP1-preferred PU	
Lenght	6000 mm	Width	200.00 mm	Height	105.00 mm
Gross weight	41 kg	Volume	0,126 m³		
Min. quantity	6	Max. Quantity	6		

84 meters = 1 bundle					
Lenght	6000 mm	Width	230 mm	Height	860 mm
Volume	1,187 m³				
Min. Quantity	84.00	Max. Quantity	84.00		

168 meters = 1 bundle					
Lenght	6000 mm	Width	460 mm	Height	860 mm
Volume	2,374 m³				
Max. Quantity	168.00	Min. Quantity	168.00		

Tender Text

Wide span cable tray, acc. to DIN EN 61537, with continuous perforated and beaded side beams, as well as riveted bottom with offset perforation and perforated cross beads for stabilisation and barrier strip fastening. Please order splice plate WSV 105.390 separately.

Dimensions (approx. dimensions)

Height H x Width W : 105 x 200 mm

Material thickness : 1.5 mm

Cross section distance : 300 mm

Side beam perforation : 9.5 x 13 mm

Hole distance : 50 mm

Delivery length : 6000 mm

Usable cross-section : 15955 mm²

Material : steel, hot-dip galvanised acc. to DIN EN ISO 1461

Technical Datasheet

Long Span Cable Tray

WRL 105.200 F

the photorealistic images are to be considered as reference images

Tender Text

NIEDAX Model No. : WRL 105.200 F
EP Material_____ EP wage_____
Unit price/meter

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
WDRS 20 F	Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
WDV 200 F	Cover for WSL/WRL, w. joint strip, 204x3000 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461

Barrier strip

Model No.	Description
KLWC 16 F	Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 85 F	Barrier strip, 80x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
WSV 105.390 F	Splice plate, 106,5x390 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories