

RAFALE II



FR
EMBALLAGES A SEPARER ET A DEPOSER DANS LE BAC DE TRI

FR
Cet appareil, ses accessoires et piles se recyclent

À DÉPOSER EN MAGASIN OU À DÉPOSER EN DÉCHÈTERIE


Points de collecte sur www.quefairedesdechets.fr

Caractéristiques techniques / Características técnicas / Características técnicas / Caratteristiche tecniche

Modèle-Référence / Modelo-Referencia / Modello-Riferimento / Modelo-Referencia	BL05/BL07152001	BL05/BL07302001
Tension nominale / Tensión nominal / Tensione nominale / Tensão nominal	230VAC 50Hz	
Puissance nominale / Potencia nominal / Potenza nominale / Potência nominal	6W/10W/15W (15W ERP)	25W/30W/35W (35W ERP)
Type-Longueur de câble / Tipo-Longitud del cable / Tipo-Lunghezza del cavo / Tipo-Comprimento do cabo	-	
Indice de protection / Grado de protección / Índice di protezione / Grau de protecção	IP20 / IK08	
Dimensions / Dimensiones / Dimensioni / Dimensões	diam 60 ht 170	diam 80 ht 225
Lampes LED / Lámparas LED / Lampade LED / Lâmpadas LED	LED	
Recouvrable / can be cover or not	NO	
Flux lumineux nominal / Flujo luminoso nominal / Flusso luminoso nominale / Fluxo luminoso nominal	1200lm (1405 ERP)	3150 lm (2398ERP)
Durée de vie nominale / Vida útil nominal / Durata di vita nominale / Tempo de vida nominal	≥ 50000 h (L70 @ 25°C)	
Dimmable	triac	
Température de couleur / Temperatura de color / Temperatura di colore / Temperatura de cor	3000K/3500K/4000K	
Indice de rendu des couleurs / Índice de rendimiento de color / Índice di resa del colore / Índice de restituição das cores	≥ 90 Ra	
Angle de faisceau nominal / Ángulo del haz luminoso nominal / Ângulo del fascio nominale / Ângulo nominal do feixe	60° (ERP cone 90°)	
Facteur de puissance / Factor de potencia / Fattore di potenza / Fator de potência	> 0.9	





WARNING
 L'installation doit être réalisée par un professionnel qualifié
 Veuillez couper l'alimentation générale afin d'éviter les risques d'électrocutions
 Veuillez vous assurer de la bonne tension du réseau
 Please make sure to turn the power off before installation
 Terminal block not included, installation and maintenance must be performed by qualified person
 Please make sure the lamp is working with the correct input voltage





A: 4Wire 3Circuit Track System

Size	15W	25W	35W
D	Ø60	Ø70	Ø80
L1	105	135	160
L2	220	220	220
L3	170	200	225
W	45	45	45

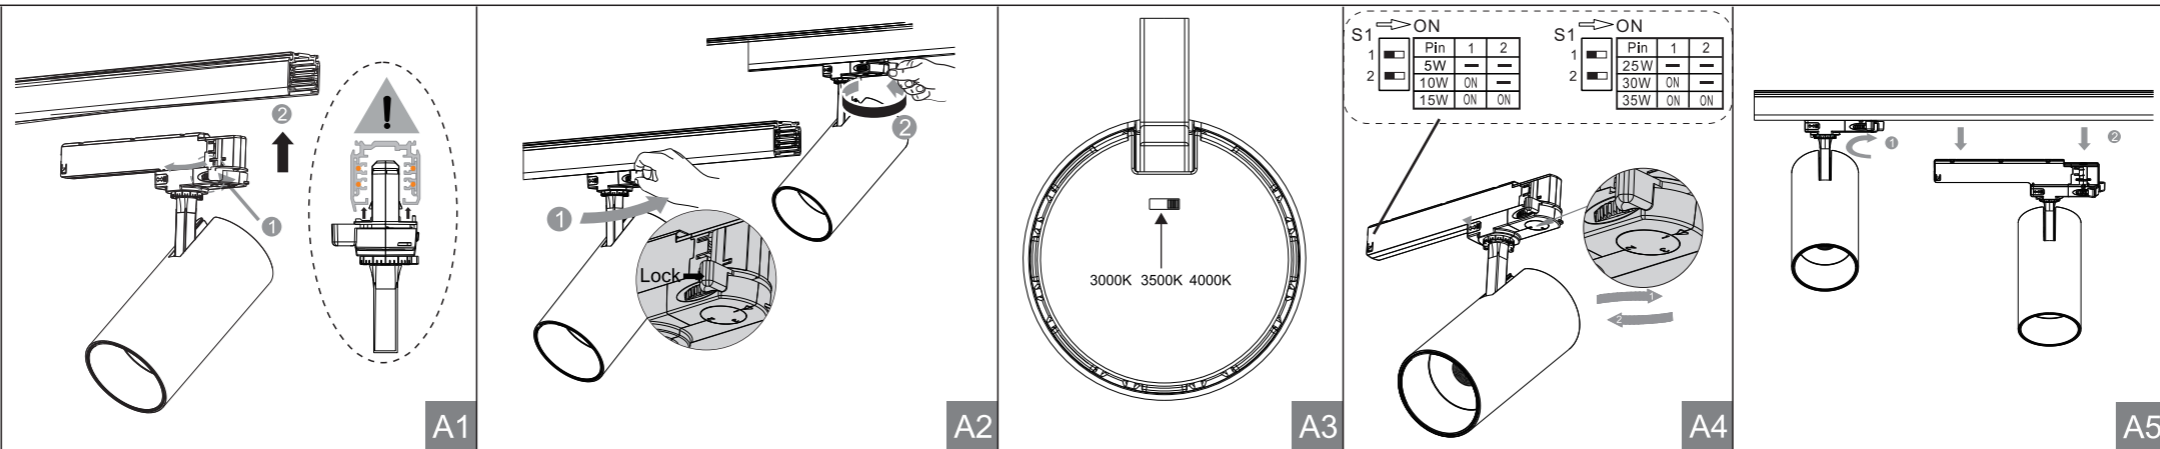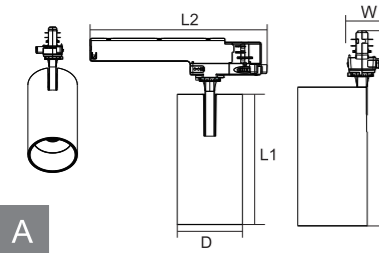

The track light is universal compatible.
 It works with the following track systems:

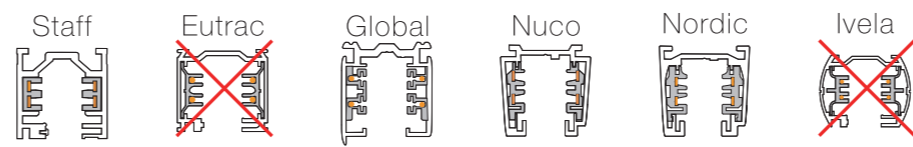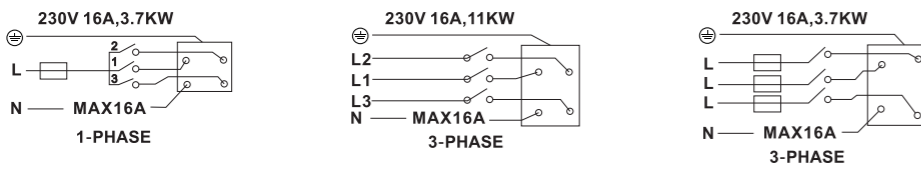

A7

B: Surface

