


Wide Span Cable Tray

perforated, with continuous perforated and beaded side profiles

WRL 200.600 F

EAN Code: 4013339593606

the photorealistic images are to be considered as reference images

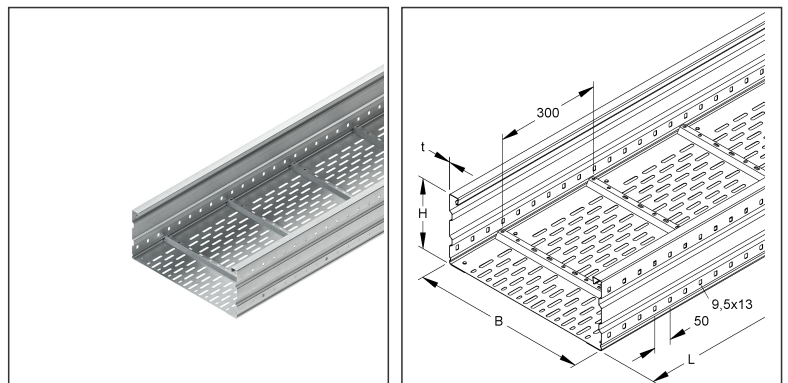

Article Description

Wide span cable tray, 200x600x6000 mm, t=1,5 mm, perforated, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Technical Datasheet

Long Span Cable Tray

WRL 200.600 F

the photorealistic images are to be considered as reference images

Incl. accessories

6 meter = 1 piece		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	4 pcs.	
RSL 600 F	Joint bar for wide span cable tray, B=589 mm, for bottom stabilisation, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	1	

48 meter = 1 bundle		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
FLM 6X12 F	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, hot dip galvanised DIN EN ISO 1461	32 pcs.	
RSL 600 F	Joint bar for wide span cable tray, B=589 mm, for bottom stabilisation, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories	8	

Additional Price Information

Article group	N13
---------------	-----

Weight


Weight per quantity unit	12 kg
Weight in kg per 100	1244 kg

Physical Article Dimensions

Height	200.00 mm
Width	600 mm
Depth/length	6000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

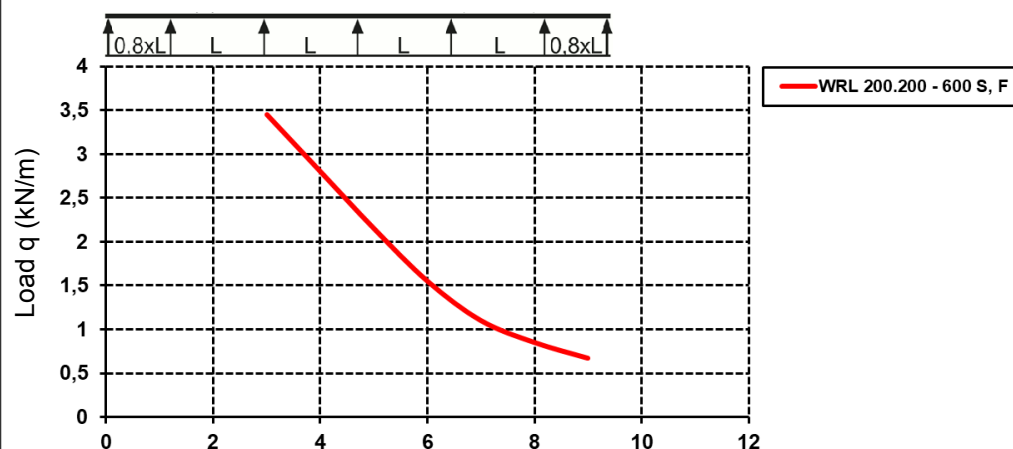

Fixing distance (m)

The load details shown in the diagram are independent of the position of the connectors.

Technical Datasheet

Long Span Cable Tray

WRL 200.600 F

the photorealistic images are to be considered as reference images

Packing Dimension

6 meters = 1 piece		✔ VP1-smallest packaging unit (PU) ✔ VP1-preferred PU			
Lenght	6000 mm	Width	600 mm	Height	200.00 mm
Gross weight	75 kg	Volume	0,720 m³		
Min. quantity	6	Max. Quantity	6		

48 meters = 1 bundle					
Lenght	6000 mm	Width	630 mm	Height	860 mm
Volume	3,251 m³				
Min. Quantity	48.00	Max. Quantity	48.00		

Tender Text

Wide span cable tray, acc. to DIN EN 61537, with continuous perforated and corrugated side beams, as well as riveted bottom with offset perforation and perforated cross beads for stabilisation and barrier strip fastening, including a joint bar RSL... and proportional fastening accessories in hot-dip galvanised. Please order splice plate WSV 200.500 separately. Dimensions (approx. dimensions) H x W : 200 x 600 mm Material thickness : 1.5 mm Cross-section thickness distance : 300 mm Side beam perforation : 9.5 x 13 mm Hole distance : 50 mm Delivery length : 6000 mm Usable cross-section : 107995 mm² Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461 NIEDAX Model No. : WRL 200.600 F EP Material_____ EP Wage_____ Unit price/meter	
---	--

Safety & Environment

REACH Date	23.01.2024
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
WDRS 20 F	Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
WDV 600 F	Cover for WSL/WRL, w. joint strip, 604x3000 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461

Technical Datasheet

Long Span Cable Tray

WRL 200.600 F

the photorealistic images are to be considered as reference images

Related items

Barrier strip

Model No.	Description
KLWC 16 F	Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories
RW 110 F	Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories

Connector

Model No.	Description
WSV 200.500 F	Splice plate, 201,5x500 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories