


Wide Span Cable Tray

unperforated, with unperforated and beaded side profiles, but with connector perforations

WRU 150.300 F

EAN Code: 4013339591107

the photorealistic images are to be considered as reference images

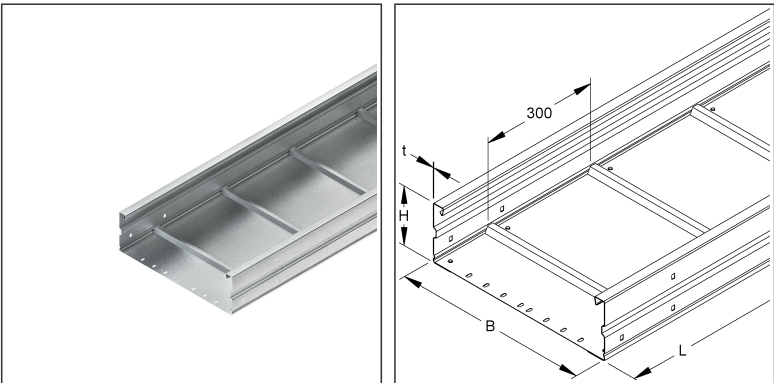

Article Description

Wide span cable tray, 150x300x6000 mm, t=1,5 mm, unperforated, steel, hot dip galvanised DIN EN ISO 1461

Additional Price Information

Article group N13

Weight

Weight per quantity unit 9,148 kg  
Weight in kg per 100 915 kg

# Technical Datasheet

## Long Span Cable Tray


WRU 150.300 F

the photorealistic images are to be considered as reference images

### Physical Article Dimensions

|              |           |
|--------------|-----------|
| Height       | 150.00 mm |
| Width        | 300 mm    |
| Depth/length | 6000 mm   |

### Load Specifications

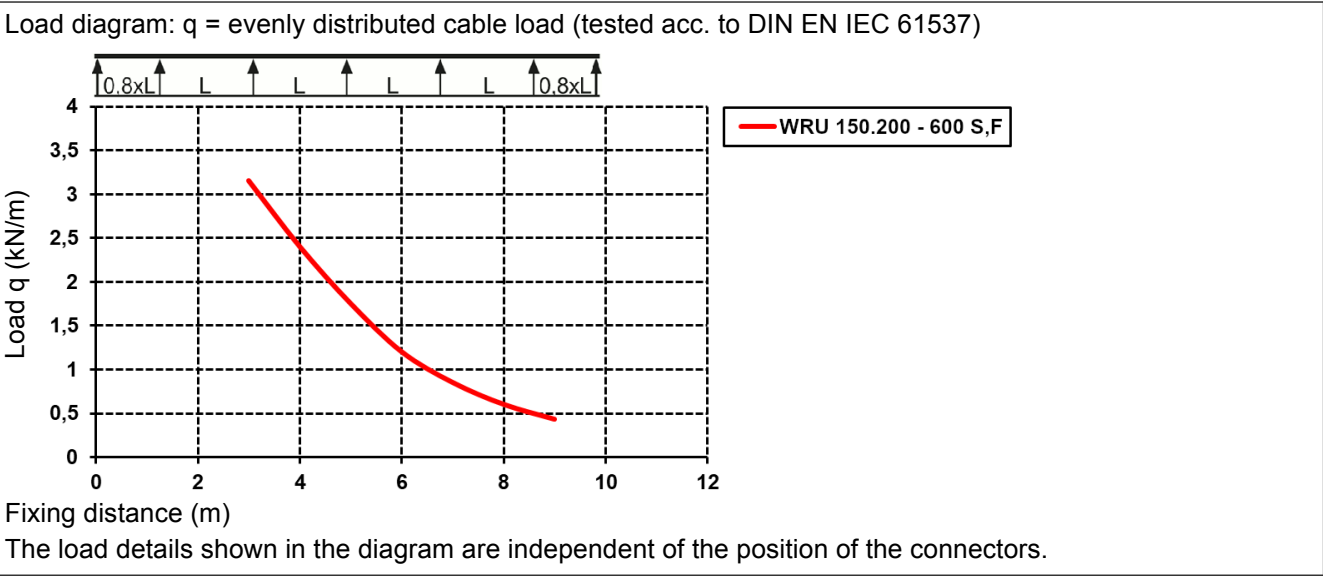

### Packing Dimension

|                           |         |                                     |          |                    |           |
|---------------------------|---------|-------------------------------------|----------|--------------------|-----------|
| <b>6 meters = 1 piece</b> |         | ✓ VP1-smallest packaging unit ( PU) |          | ✓ VP1-preferred PU |           |
| Lenght                    | 6000 mm | Width                               | 300 mm   | Height             | 150.00 mm |
| Gross weight              | 55 kg   | Volume                              | 0,270 m³ |                    |           |
| Min. quantity             | 6       | Max. Quantity                       | 6        |                    |           |

### Tender Text

Wide span cable tray, acc. to DIN EN 61537, with unperforated and beaded side beams, with connector perforation for connection, as well as riveted bottom with unperforated cross beads for stabilisation. Please order splice plate WSV 150.500 separately.

Dimensions (approx. dimensions) H x W : 150 x 300 mm

Material thickness : 1.5 mm Cross-section

distance : 300 mm

Delivery length : 6000 mm

Usable cross-section : 38215 mm²

Material : Steel, hot-dip galvanised acc. to DIN EN ISO 1461

NIEDAX Model No. : WRU 150.300 F

EP Material \_\_\_\_\_ EP Wage \_\_\_\_\_

Unit price/meter \_\_\_\_\_

# Technical Datasheet

## Long Span Cable Tray

WRU 150.300 F

the photorealistic images are to be considered as reference images

### Safety & Environment

|            |             |
|------------|-------------|
| REACH Date | 23.01.2024  |
| REACH Info | Conformable |
| RoHS Info  | Conformable |

### Origin & International Trade

|                       |          |
|-----------------------|----------|
| Country of origin     | DE       |
| Customs tariff number | 73089059 |

### Related items

#### Cover

| Model No. | Description                                                                                                                   |
|-----------|-------------------------------------------------------------------------------------------------------------------------------|
| WDRS 20 F | Turning bolt with locknut acc. to DIN EN ISO 10511, for WSL/WRL, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |
| WDV 300 F | Cover for WSL/WRL, w. joint strip, 304x3000 mm, with turning lock, steel, hot dip galvanised DIN EN ISO 1461                  |

#### Barrier strip

| Model No. | Description                                                                                                       |
|-----------|-------------------------------------------------------------------------------------------------------------------|
| KLWC 16 F | Barrier strip fastening clamp, for 16 mm slot width, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |
| RW 110 F  | Barrier strip, 98x3000 mm, t=0,9 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories                 |

#### Connector

| Model No.     | Description                                                                              |
|---------------|------------------------------------------------------------------------------------------|
| WSV 150.500 F | Splice plate, 151,5x500 mm, steel, hot dip galvanised DIN EN ISO 1461, incl. accessories |