

Date: \_\_\_\_\_  
 In hands date of project: \_\_\_\_\_  
 Project name/Number: \_\_\_\_\_  
 Name of distributor: \_\_\_\_\_  
 Client #: \_\_\_\_\_  
 Name of end user: \_\_\_\_\_

### ORDERING INFORMATION

Order code: 64478  
 Description: LED/PLVL/11W/40K/2P/ND/STD  
 UPC: 69549644786  
 Case quantity: 50

### PERFORMANCE DATA

Shape: PL Vertical Long  
 Base: G24d 2PIN  
 Watts (W): 11  
 Starting method: Ballast bypass and ballast compatible (magnetic)  
 Color temperature (K)\*\*: 4 000  
 Life L70 (hrs): 50 000  
 Initial Lumens (lm)\*: 1 144  
 Initial lumens per watt (lm/W): 104  
 CRI: 84  
 Beam angle (°): 120  
 Swivel rotation (°): 170  
 Operating temperature range: -20°C / -4°F to 45°C / 113°F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %



Please refer to the ballast compatibility list to confirm lamp compatibility with the existing luminaire.

### CAUTIONS

This lamp only operates on magnetic ballasts or ballast bypass in 120-277V applications. Not for use in 347V direct line voltage applications

Turn power off before inspection, installation, or removal.

Risk of electrical shock – do not use where directly exposed to water or weather.

Not for use in totally enclosed luminaires.

Do not open – no user serviceable parts inside.

This device is not intended for use with emergency exit fixtures or emergency exit lights.

Not for use with dimmers.

This lamp only operates on magnetic ballasts or ballast bypass. If the lamp does not light up when the luminaire is energized, remove the lamp from the luminaire and contact the lamp manufacturer or a qualified electrician.

| Qty | Description | Price |
|-----|-------------|-------|
|     |             |       |


I accept the specifications of the lamp configuration mentioned above.

Name: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Signature: \_\_\_\_\_

Date: \_\_\_\_\_

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.


May 3, 2016

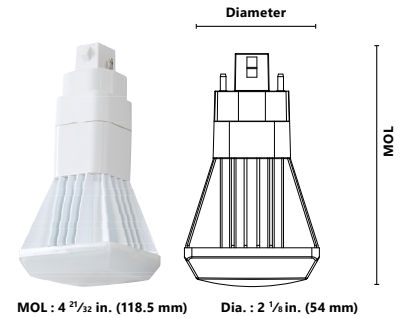

MOL : 4 2/32 in. (118.5 mm) Dia. : 2 1/8 in. (54 mm)

| LED PL Base | CFL bases replacement |
|-------------|-----------------------|
| G24d-2P     | G24d-2, G24d-3        |

NOTE: This LED lamp is a direct replacement for the CFL bases listed above. However, this LED lamp is compatible with all G24d CFL bases.



G24d-2 G24d-3