


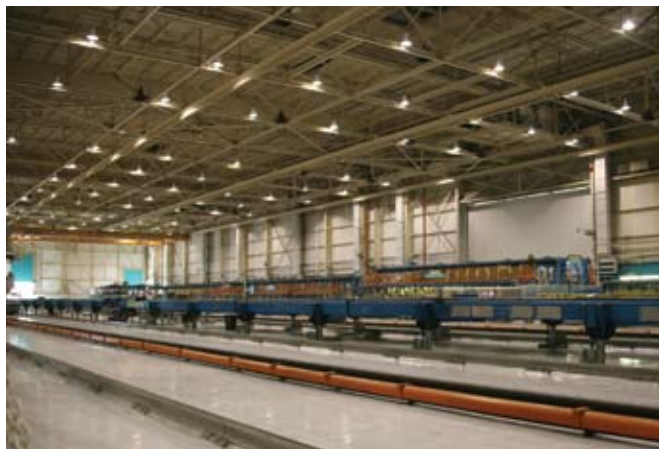

Pulse Start Metal Halide

Lamp type	Lamp watts (W)	ANSI code	Input volts (V)	Order code	Internal code	Description	Circuit type	Input power ANSI (W)	Max. input current (A)
MH	175	M152	120 / 277 / 347	16623	BALM0175TCA/PS	BMHP0175/TRITAP/C/CWA/H	CWA	208	1.10 / 0.50 / 0.40
	200	M136	120 / 277 / 347	16624	BALM0200TCA/PS	BMHP0200/TRITAP/C/CWA/H	CWA	232	1.15 / 0.50 / 0.40
	250	M153	120 / 277 / 347	16625	BALM0250TCA/PS	BMHP0250/TRITAP/C/CWA/H	CWA	288	1.65 / 0.75 / 0.60
	320	M154	120 / 208 / 240 / 277	31366	BALM0320QCA/PS	BMHP0320/QUADTAP/C/CWA/H	CWA	368	3.25 / 1.85 / 1.65 / 1.40
			120 / 277 / 347	16626	BALM0320TCA/PS	BMHP0320/TRITAP/C/CWA/H	CWA	368	1.60 / 0.70 / 0.55
	350	M131	120 / 277 / 347	16627	BALM0350TCA/PS	BMHP0350/TRITAP/C/CWA/H	CWA	400	1.80 / 0.78 / 0.40
	400	M155	120 / 208 / 240 / 277	16628	BALM0400QCA/PS	BMHP0400/QUADTAP/C/CWA/H	CWA	452	2.31 / 1.00 / 1.15 / 1.00
			120 / 277 / 347	31548	BALM0400TCA/PS	BMHP0400/TRITAP/C/CWA/H	CWA	453	4.10 / 1.80 / 1.40
	450	M144	120 / 277 / 347	16629	BALM0450TCA/PS	BMHP0450/TRITAP/C/CWA/H	CWA	508	2.90 / 1.27 / 1.00
	575	M178	120 / 277 / 347	58971	N/A	BMHP0575/TRITAP/C/HX/H	HX-HPF	635	10.05 / 3.15 / 3.00
	875	M166	120 / 208 / 240 / 277	57523	N/A	BMHP0875/QUADTAP/C/CWA/HX	CWA	950	6.60 / 3.80 / 3.30 / 2.85
			120 / 277 / 347	56523	N/A	BMHP0875/TRITAP/C/CWA/H	CWA	940	6.50 / 2.85 / 2.25
	1000	M141	120 / 277 / 347	16732	BALM1000TCA/PS	BMHP1000/TRITAP/C/CWA/H	CWA	1080	7.55 / 3.25 / 2.60

Remote Ballasts

Lamp type	Lamp watts (W)	ANSI code	Input volts (V)	Order code	Internal code	Description	Circuit type	Input power ANSI (W)	Max. input current (A)
MH	175	M57	120 / 208 / 240	16609	BALM0175XCI/R	175W M57/H39 CWI IN/OUT REMOTE	CWI	215	0.82 / 0.48 / 0.41
			120 / 277 / 347	31166	BALM0175TCA/R	BMH0175/TRITAP/REM/CWA/H/STD	CWA	210	1.10 / 0.50 / 0.40
			347 / 480 / 600	31200	BALM0175JCI/R	BMH0175/347/480/600/REM/CWI/H/	CWI	215	0.30 / 0.22 / 0.17
	250	M58	120 / 208 / 240	16611	BALM0250XCI/R	BMH250/120/208/240/REM/C/CWI/H	CWI	215	0.82 / 0.48 / 0.41
			120 / 277 / 347	31360	BALM0250TCA/R	BMH0250/TRITAP/REM/CWA/H/STD	CWA	290	1.10 / 0.50 / 0.40
			347 / 480 / 600	16610	BALM0250JCIR	250W MH/MV CWI 347/480/600VREM	CWI	292	0.30 / 0.22 / 0.17
	400	M59	120 / 208 / 240	31361	BALM0400XCI/R	BMH0400/120/208/240/REM/CWI/H/	CWI	462	0.98 / 0.70 / 0.49
			120 / 277 / 347	31177	BALM0400TCA/R	BMH0400/TRITAP/REM/CWA/H/STD	CWA	458	3.10 / 1.40 / 1.10
			347 / 480 / 600	31183	BALM0400JCI/R	BMH0400/347/480/600/REM/CWI/H/	CWI	462	0.33 / 0.23 / 0.19
	1000	M47	120 / 208 / 240	31191	BALM1000XCI/R	BMH1000/120/208/240/REM/CWI/H/	CWI	1080	4.37 / 2.55 / 2.20
			120 / 277 / 347	31184	BALM1000TCA/R	BMH1000/TRITAP/REM/CWA/H/STD	CWA	1080	5.90 / 3.25 / 2.60
			347 / 480 / 600	31190	BALM1000JCI/R	BMH1000/347/480/600/REM/CWI/H/	CWI	1100	1.52 / 1.10 / 0.90
HPS	250	S50	120 / 208 / 240	16630	BALS0250XCI/R	250W 120/208/240V REMOTE	CWI	290	0.87 / 0.51 / 0.44
			120 / 277 / 347	31367	BALS0250TCA/R	BHPS0250/TRITAP/REM/CWA/H/STD	CWA	295	1.86 / 0.81 / 0.64
	400	S51	120 / 208 / 240	16631	BALS0400XCI/R	BHPS0400/120/208/240/REM/CWI/H	CWI	465	0.88 / 0.50 / 0.44
			120 / 277 / 347	31369	BALS0400TCA/R	BHPS0400/TRITAP/REM/CWA/H/STD	CWA	464	3.20 / 1.40 / 1.15
			347 / 480 / 600	31368	BALS0400JCI/R	BHPS0400/347/480/600/REM/CWI/H	CWI	465	0.54 / 0.40 / 0.32

1- For additional specifications, dimensions, wiring diagrams, and a complete ballast listing, please visit www.standardpro.com